OPPLE

OPPLE LIGHTING CO., LTD.
V2–V3 Building, The MIXC, Lane 1799, Wuzhong Road,
Minhang District, Shanghai, China. 201103

OPPLE.COM

OPPLE

Consumer CATALOGUE 2026-2027

See Beyond



OPPLE.COM

01-14
About OPPLE

33-38
Ceiling Lamp
-LIVING ROOM

WindyS 3
Black Diamond

39-50
Ceiling Lamp
-BEDROOM

Star Diamond 3
YueLing
QingYu
White 4
Beauty

51-60
Ceiling Lamp
-COMPACT

Detector 3
Star Diamond 3
White 4
Beauty

61-64
Mirror Lamp
-BATHROOM

Xiaobai

65-68
Table Lamp
-READING & WORKING

Reader 2

69-72
Wall Lamp
-OPTIMAL AMBIENCE

Peacock

73-88
Switch & Socket

F01 & F02
Thinplus & Thinplus Pro

89-92
Power Track

Power Track P

93-102
Ventilation Fan

Fresh Wind

Content



About OPPLE

OPPLE Lighting Co., Ltd., a leading lighting company in China, is rapidly expanding across more than 70 countries and regions worldwide with nearly 6,000 employees. OPPLE upholds its brand concept of “See Beyond” and its mission to create value out of light by focusing on innovation that puts people first. It boasts the largest distribution network in China and over 130,000 sales terminals worldwide, including over 2,500 branded shops. OPPLE has a strong focus on innovation with nearly 4,000 patents, backed by its 3 large ISO-accredited manufacturing factories and an R&D team of over 500 members.

Furthermore, OPPLE has set up 2 professional laboratories that meet international standards. Among them, the Suzhou laboratory owns 13 professional branch testing labs. It has been awarded the ISO17025 national certification by CNAS/ILAC (International Laboratory Accreditation Cooperation) and has been authorized by TÜV SÜD as a cooperative testing laboratory, ensuring that its testing data are widely recognized.

We now hold not only the factory certifications, such as ISO9001: Quality Management, ISO14001: Environment Management, ISO50001: Energy Management, and ISO 45001: Occupational Health and Safety Management, etc., but also various international product quality certificates: CB, CE, and special ones for different countries: RCM(SAA), BIS, SASO, TISI, SIRIM, SNI, NEA, etc. With the support of our experienced and highly skilled local OPPLE team, you can take full advantage of our innovative products and solutions.

In 2020, OPPLE became the official partner and appointed lighting solution provider of the China National Pavilion at Expo 2020 Dubai, and lit up the comprehensive image hall of Shanghai city of the 3rd China International Import Expo (CIIE), effectively showcasing Shanghai as a “city card” in front of the world.

R&D Center

OPPLE Lighting holds a professional R&D team with more than 500 members, and possesses 2 professional R&D laboratories in Shanghai and Zhongshan. The R&D laboratories have been establishing strategic cooperation partnerships with many world-leading organizations like Huawei in technological fields such as LED, one TLED, Zigbee wireless smart control systems, and smart home technologies.

Research & Development

2
Professional R&D Labs

500+
Professional R&D staff

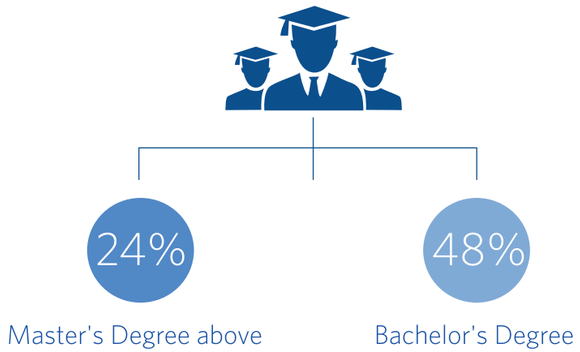

55M+ USD
Annual R&D investment

4,000+
Issued and pending patents

400+
Top engineers, designers & technicians

Main Production Facilities

Wujiang

Area: 600,000+ m^2
Staff: Nearly 2,000

Production line:
LED luminaires (downlights/spotlights/panels...)



Zhongshan

Area: 52,000+ m^2
Staff: Nearly 2,500

Production line:
LED luminaires (light sources/battens/ ceiling lamps/...); electricals appliances



South China

Area: 300,000+m^2
Staff: Nearly 1,000

Production line:
The South China Industrial Park started construction in 2021 and will focus on smart property management, automated warehouse, automated assembly, MES digital management systems, etc.



Automated Production Line

In 2015, the first automated production line was built to greatly increase production efficiency and capacity.

Industry 4.0

In 2016, the first robot arm was used for automatic inspection of molds, marking the official introduction of Industry 4.0.



4.0

Lighting Design Team Standard Work Process

For different projects, designers will support to multiple degrees to help control the deviation and implementation of the results at each phase.

1. Early-stage preparations
2. Conceptual design
3. Detailed design
4. Drawing
5. Product realization
6. Commissioning
7. Acceptance check

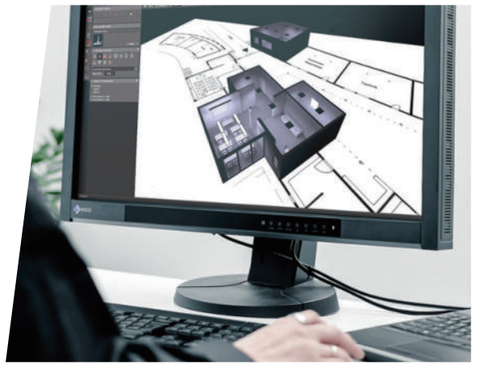

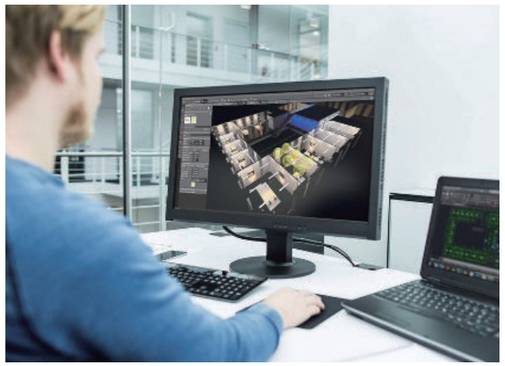

Product Testing & Certification

The company has the most advanced product testing system in the industry, and maintains long-term in-depth cooperation and technical communication with multiple authoritative testing and certification third-parties. At the same time, the company has a national-level lighting laboratory (CNAS certified) in line with ISO/IEC17025. In the production of finished luminaires, a comprehensive quality inspection and monitoring process is set up for quality control.

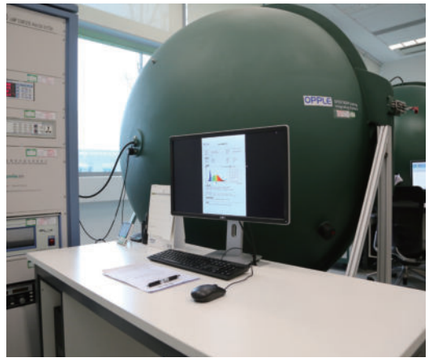



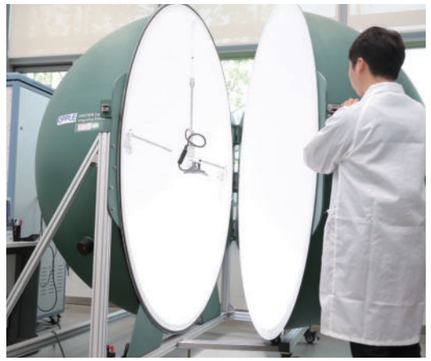











On-site Technical Support

The project is equipped with a professional on-site technical support team, tracking and providing assistance starting from the early stage of the plan, to ensure the proper installation of the products and solve emergencies on the spot, so as to guarantee the final effect and progress of the project.





Customer Service

A full on-site customer service is provided according to the customer's requirements, including professional installation instructions and corresponding after-sales service.





Business Scope

Founded in 1996, OPPLE has been engaged in R&D, production, distribution and after-sales services of lighting sources, lighting fixtures and controls, operating in over 70 countries and regions in Asia Pacific, Europe, Middle East and South Africa. With a powerful marketing team and a well-established worldwide marketing network, it now has over 150,000 sales points.

70+
countries

150,000
Sales points worldwide









Ceiling Lamp Series	Power (W)	Lumen	Life	Dimension (mm)	Dust & Water Proof	Sensor	Dimmable	Tunable	Remote Control	Flicker Free	Never Fading	Material	
												Base	Cover
 WindyS 3	75-136W 38-90W (Lamp) 38-50W (Fan)	Up to 6000lm	20000 hrs	Φ411-Φ650 Φ880-Φ1320 (Sweep)	IP20 (Fan) IP40 (Lamp)	✗	✓	✓	✓	✓	✗	Steel /PP /PC	MS
													P35-36
 Black Diamond	MAX 14w	/	/	Φ250*1200	IP20	✗	✗	✗	✗	/	/	Metal	PVC
													P37-38

Ceiling Lamp Series	Power (W)	Lumen	Life	Dimension (mm)	Dust & Water Proof	Sensor	Dimmable	Tunable 3 CCT	Remote Control	Flicker Free	Never Fading	Material	
												Base	Cover
 Star-Diamond 3	24/36 W	Up to 2800lm	15000 hrs	Φ350/Φ420	IP40	✗	✗	✗	✗	✓	✗	PP	MS
													P41-42
 YueLing	36W	2520lm	15000 hrs	Φ405	IP40	✗	✓	✓	✗	✓	✓	PC	PC
													P43-44
 QingYu	36W	2520lm	15000 hrs	Φ435	IP40	✗	✓	✓	✗	✓	✓	PC	PC
													P45-46
 White 4	24/36 W	Up to 3000lm	15000 hrs	Φ330/Φ400	IP40	✗	✗	✗	✗	✓	✗	PP	PP
													P47-48
 Beauty	24/36 W	Up to 2800lm	15000 hrs	Φ330/Φ400	IP40	✗	✗	✗	✗	✓	✗	PP	PP
													P49-50



Ceiling Lamp Series	Power (W)	Lumen	Life	Dimension (mm)	Dust & Water Proof	Sensor	Dimmable / Tunable	Remote Control	Flicker Free	Never Fading	Material	
											Base	Cover
 Detector 3	13 W	1200lm	15000 hrs	Φ250	IP40	Motion	✗	✗	✓	✗	PP	PP
 Star-Diamond 3	13/24 W	Up to 1800lm	15000 hrs	Φ270/Φ350	IP40	✗	✗	✗	✓	✗	PP	MS
 White 4	13/24 W	Up to 2000lm	15000 hrs	Φ250/Φ330	IP40	✗	✗	✗	✓	✗	PP	PP
 Beauty	13/24 W	Up to 1800lm	15000 hrs	Φ250/Φ330	IP40	✗	✗	✗	✓	✗	PP	PP

P53-54

P55-56

P57-58

P59-60

Mirror Lamp Series	Power (W)	Lumen	Life	Length*Width (mm)	Flicker Free	Tube Adjustable	Material	
							Base	Cover
	10W	650lm	15000 hrs	586*64	✓	✗	PC	PMMA
Xiaobai								

P63-64



Table Lamp Series	Power (W)	Lumen	Life	Rated Voltage	Plug	Desktop Illumination	Dimmable	Battery	Flicker Free	Material
	10W	⩾770 lm	20000 hrs	DC5V	USB Type C	★★★	Stepless	N/A	✓	ABS+PS
Reader 2										

P67-68

Wall Lamp Series	Power (W)	Lumen	Life	Light Color	Special Lens Design	Material
	5.7W	250lm	15000 hrs	Colorful + White		Die-cast Aluminum +PC+Glass
Peacock						

P71-72



Switch and Socket Series	High Capacity	Dimension (mm)	Safety Shutters	850° Anti-flaming	Switching Times	Plugging Times	Material	
							Cover & Body	Contact Piece
 F01	16A	120*70	✓	✓	40000	5000	Flame retardant PC	Red copper Silver alloy-plated
 F02	16A	86*88 146*88	✓	✓	40000	15000	Flame retardant PC	Red copper Silver alloy-plated
 Thinplus & Thinplus Pro	16A	86*86 146*86	✓	✓	60000	30000	Flame retardant PC	Red copper Silver alloy-plated

P75-76

P77-78

P79-88



Power Track Series	Power	High Capacity	Dimension (mm)	Safety Shutters	850° Anti-flaming	Material	
						Cover & Body	Contact Piece
 Power Track P	6250 W	25A	500*80	✓	✓	Flame retardant PC +AL	Brass

P91-92



Ventilation Fan Fresh Wind	Power (W)	Air Volume (m^3/min)	Noise (dB)	Dimension (mm)	Material	
					Front Mask	Housing
 Fresh Wind-Wall Mount	30-45 W	3.6-17	43-55	236-400	PP	PP
 Fresh Wind-Ceiling Mount	30-40 W	2-3	42-52	245-340	ABS	PP
 Fresh Wind-Window Mount	15-20 W	3-4.2	44-55	200-260	PP	PP

P95-98

P99-100

P101-102



CEILING LAMP
-LIVING ROOM

LED

DIMMABLE

LED Fan Lamp WindyS 3

Order Name	LEDFSD-E-Rd420-38W-WindyS 3 White/Gold
Power (W)	75W (Lamp 38W/Fan 38W)
Color temperature (K)	2700K+5700K
Dimensions (mm)	Φ411x340/Φ412x340
Material	Base: PP Cover: MS
Lumen (lm)	2600



LED

DIMMABLE

LED Fan Lamp WindyS 3

Order Name	LEDFSD-E-Rd480-68W-WindyS 3 White/Gray	LEDFSD-E-Rd650-90W-WindyS 3 White
Power (W)	106W (Lamp 68W/Fan 40W)	136W (Lamp 90W/Fan 50W)
Color temperature (K)	2700K+5700K	2700K+5700K
Dimensions (mm)	Φ510x349	Φ650x366
Material	Base: PC Cover: MS	Base: Steel Cover: MS
Lumen (lm)	4800	6000

















Black Diamond

Order Name	HPL250-14W-Black Diamond
Power(w)	MAX 14W
Cap Base	E27
Dimensions(mm)	250*1200
Material	Body: Metal Cover: PVC



CEILING LAMP

-BEDROOM

LED

Star Diamond 3



Order Name	LEDCeiling-U3-Rd350-24W-Star Diamond	LEDCeiling-U3-Rd420-36W-Star Diamond
Power (W)	24W	36W
Color temperature (K)	3000/4000/5700K	5700K
Dimensions (mm)	Φ350*59	Φ420*68
Material	Base: PP	Base: PP
	Cover: MS	Cover: MS
Lumen (lm)	1800	2800







LED

TUNABLE

YueLing

Order Name	LEDCeiling-E-Rd420-36W-STEP927/957-YL
Power (W)	36W
Color temperature (K)	2700/4000/5700K
Dimensions (mm)	Φ405*72
Material	PC
Lumen (lm)	2520





LED

TUNABLE

QingYu

Order Name	LEDCeiling-E-Rd420-36W-STEP927/957-QY
Power (W)	36W
Color temperature (K)	2700/4000/5700K
Dimensions (mm)	Φ435*72
Material	PC
Lumen (lm)	2520





BRIGHTER AND CLEANER

LED

White 4



Order Name	LEDCeiling-U4-Rd350 -24W-White	LEDCeiling-U4-Rd420 -24W-White	LEDCeiling-U4-Rd420 -36W-White
Power (W)	24W	24W	36W
Color temperature (K)	5700K	5700K	5700K
Dimensions (mm)	Φ330*50	Φ400*59	Φ400*59
Material	PP	PP	PP
Lumen (lm)	2000	2000	3000







LED

Beauty

Order Name	LEDCeiling-U-Rd350-24W-Beauty	LEDCeiling-U-Rd420-36W-Beauty
Power (W)	24W	36W
Color temperature (K)	3000/4000/5700K	5700K
Dimensions (mm)	Φ330*53	Φ400*61
Material	PP	PP
Lumen (lm)	1800	2800





CEILING LAMP
-COMPACT

LED

Detector 3

Order Name	LED-Rd260-13W-Detector 3-Mic
Power (W)	13W
Color temperature (K)	5700K
Dimensions (mm)	Φ250*49
Material	PP
Lumen (lm)	1200
Sensor	Photosensitive+Microwave







LED

Star Diamond 3

Order Name	LEDCeiling-U3-Rd260-13W-Star Diamond	LEDCeiling-U3-Rd350-24W-Star Diamond
Power (W)	13W	24W
Color temperature (K)	5700K	3000/4000/5700K
Dimensions (mm)	Φ270*58	Φ350*59
Material	Base: PP	Base: PP
	Cover: MS	Cover: MS
Lumen (lm)	1000	1800











LED

White 4

Order Name	LEDCeiling-U4-Rd260-13W-White	LEDCeiling-U4-Rd350-24W-White
Power (W)	13W	24W
Color temperature (K)	5700K	5700K
Dimensions (mm)	Φ250*49	Φ330*50
Material	PP	PP
Lumen (lm)	1200	2000

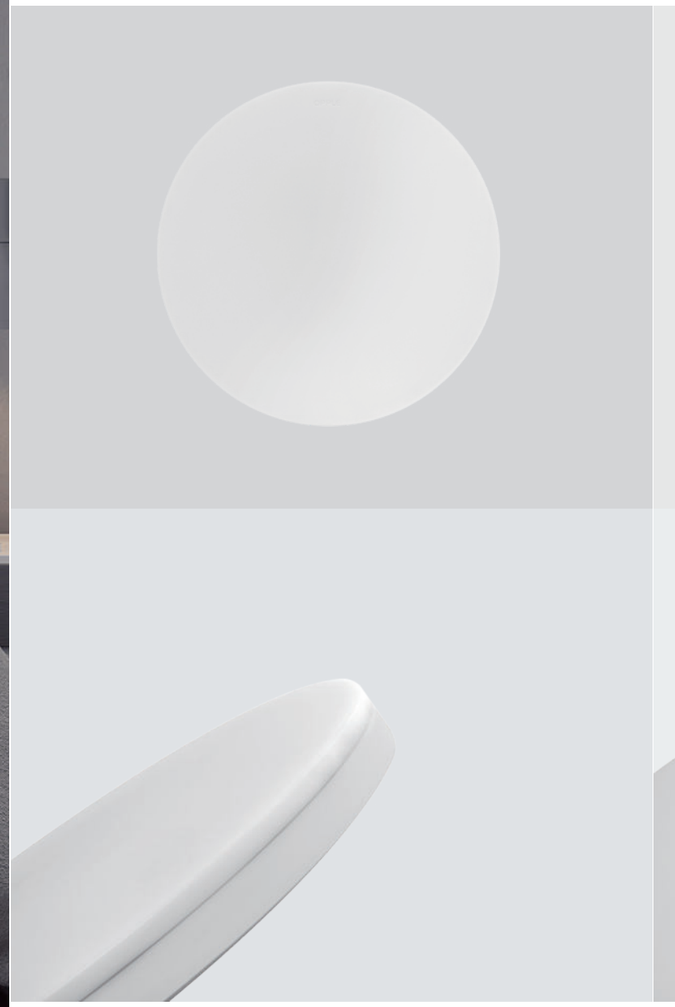





BRIGHTER AND CLEANER





LED

Beauty

Order Name	LEDCeiling-U-Rd260-13W-Beauty	LEDCeiling-U-Rd350-24W-Beauty
Power (W)	13W	24W
Color temperature (K)	5700K	3000/4000/5700K
Dimensions (mm)	Φ250*51	Φ330*53
Material	PP	PP
Lumen (lm)	1000	1800



MIRROR LAMP

-BATHROOM



LED

Xiaobai

Order Name	LED HML549 10W 4000K XIAOBAI IBU
Power (W)	10W
CCT(K)	4000K
Dimensions(mm)	586*64*50
Material	PC+PMMA
Lumen (lm)	650

TABLE LAMP
-READING & WORKING







LED

DIMMABLE

Reader 2

Order Name	LED TL 10WDim 4000K Reader2Pro WH USBC
Power (W)	10W
Color temperature (K)	4000K
Dimensions (mm)	360*110*420
Material	ABS+PS
Lumen (lm)	770

WALL LAMP
-OPTIMAL AMBIENCE



Peacock

Order Name	LED HWL 120 5.7W Peacock
Power (W)	5.7W
Color temperature (K)	3000K+4000K+5700K
Dimensions(mm)	Φ120*117.5
Material	Die-cast Aluminum+PC+Glass
Lumen (lm)	250





Switch and Socket

ASP* SHIELD SOCKET

* Avoid Single Pole insertion- DO NOT insert it with violence force.

GUARD YOUR SAFETY

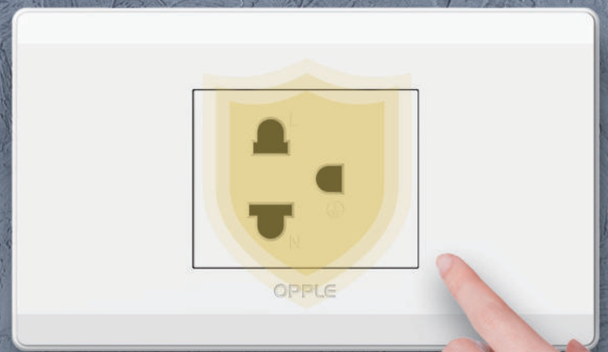

Avoid Single Pole insertion

16A High Capacity

850°C Anti-flaming

Instant Wire Connection

5000 times of Plugging

40,000 times On-Off

F01 Series **OPPLE ASP Shield Socket / OPPLE Art Switch**





ASP* Avoid Single Pole insertion

DO NOT insert it with violence force.

Prevent fingers from touching the metal parts in the socket.
Effectively prevent children from accidental electric shock.

850°C Anti-flaming

> Socket shutters can help to shield the metal parts in the socket and prevent electric shock.

> Keep children safe.



Safe with High flame retardant PC material
Up to 850°C Anti-flaming PC material
Safety and No deformation



Durable and Reliable

16A

High Capacity

40,000 On-Off

16A high capacity Switch with Red copper & red copper silver coated mechanism parts

Stronger current carrying capacity

Up to 40000 times of Switching

5000 times of Plugging

16A high capacity Socket for high-power electrical appliances

Up to 5000 times of plugging



Two color option: **White and Grey Black**

Easy to Fix

Modular design

Modular design for easy combination of frame and function module.
Function module can match most plates of other brand.

Instant wire connection for easy installation







ASP* SHIELD SOCKET

* Avoid Single Pole insertion-DO NOT insert it with violence force.

GUARD YOUR SAFETY



F02 Series **OPPLE ASP Shield Socket / OPPLE Art Switch**

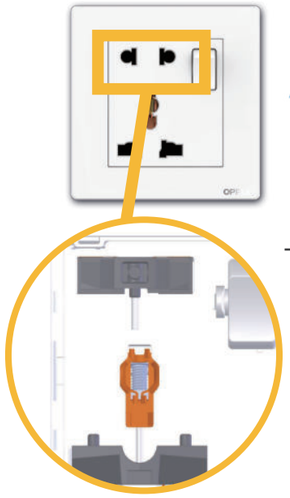

ASP* Avoid Single Pole insertion
DO NOT insert it with violence force.

Prevent fingers from touching the metal parts in the socket.
Effectively prevent children from accidental electric shock.

> Socket shutters can help to shield the metal parts in the socket and prevent electric shock.

> Keep children safe.



850℃
Anti-flaming

Safe with High flame retardant PC material
Up to 850 C Anti-flaming PC material
Safety and No deformation

Durable and Reliable

16A

High Capacity

40,000 On-Off

15000 times of Plugging

16A high capacity Switch with Red copper & red copper silver coated mechanism parts

Stronger current carrying capacity

Up to 40000 times of Switching

16A high capacity Socket for high-power electrical appliances

Up to 15000 times of plugging



Three color option:**White and Gold and Silver Gray**



2.4A USB port for quick charge

Easy to Use

> Edge to edge design with big button
Press as you like with comfortable touch

> Fluorescent indicator design
Easy to identify in the dark and no dazzling

Thinplus & Thinplus Pro



4.2mm
Thickness

BEYOND THIN

- **4.2**mm Ultra-thin
- **60,000** Times On-Off
- **30,000** Times of Plugging
- 16A High Capacity
- 20W **20W** USB Fast Charging Port
- **99.9%** Antibacterial Rate
- **850°C** Anti-flaming
- ASP Avoid Single Pole Insertion



Fantastic Appearance



4.2mm
Ultra-thin

4.2 mm Ultra-thin

Timeless elegance
Modern minimalism

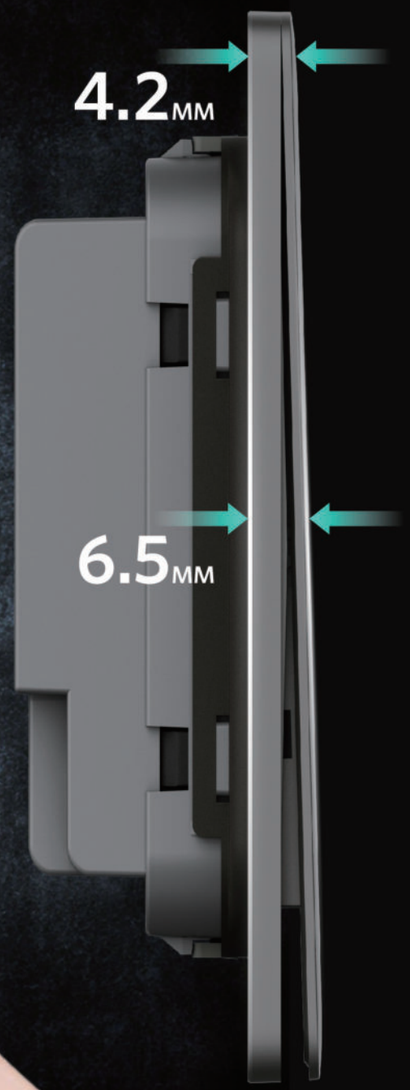

2° Invisible Rocking Angle

Merge with the wall
Instant response



Excellent performance



60,000
Times On-Off

Up to 60,000 Switching Cycles

Exceed IEC standard by 50%
Equivalent to 32-year extended service life*

* Calculated based on an average of 5 switching cycles per day.



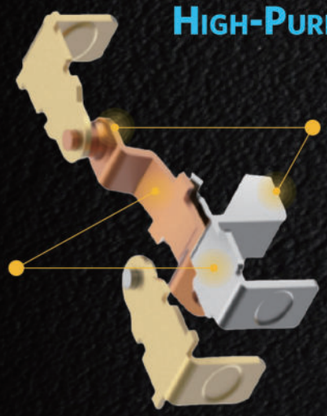

High-Purity Copper + Silver alloy

Switch Components

High conductivity
Strong current capacity
Excellent Weld Resistance
Durable against arc damage

Long Lifespan

Excellent Performance



30,000
Times of Plugging

Up to 30,000* Plugging Cycles

Exceed IEC standard by 100%
Equivalent to 27-year extended service life*

*1. FOR 13A 3pin BS socket & 15A 3pin socket only
2. Calculated based on an average of 3 plugging cycles per day

16A
High Capacity

High-Current Rating

3500W high-capacity*
Strong safety and high reliability

* 220V X 16A ≈ 3500W

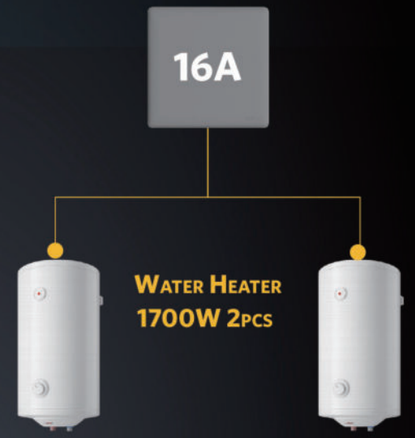

Specially formulated tin phosphor bronze alloy

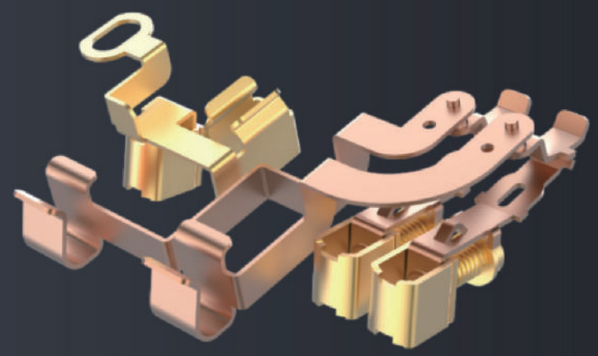

High conductivity
Ultra-low resistance
Excellent elasticity retention
Strong corrosion resistance

Long Lifespan

20W
20W USB Fast Charging Port

20W USB Fast Charging Port

Support Type-C and USB-A
2X+ faster charging than standard USB *(For iPhone15 Pro Max)



50 mins Charging

20W fast charging 80%
Normal charging 35%

Excellent performance

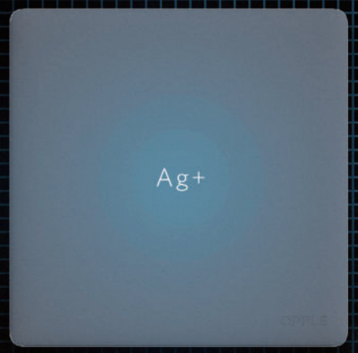

99.9%
Antibacterial Rate

Up to 99.9% Antibacterial Rate*

Antibacterial silver-ion coating
Safe for families

* Thinplus Pro series

Superior Materials

High-Strength Steel Frame

Automotive-grade steel*
Stable installation & anti-deformation
Anti-rust & corrosion resistance

* Manganese content: 2-3 times higher than typical cold-rolled steel plates

High Flame-Retardant PC Materials



Fire-resistant elements



Impact-resistant elements



UV-resistant elements

OPPLE Formula

Up to 850℃ anti-flaming PC
Exceptional heat resistance without deformation

850°C
Anti-flaming

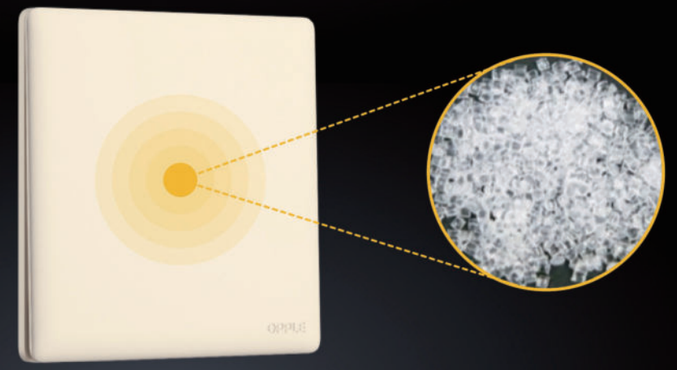

Electrical Insulation

Heat Resistant

Impact Resistant

UV & Oxidation Resistant

Outstanding Design

Touch Perfected by Microns

Ultra-precise 5μm molding
Engineered texture for better touch
Highly scratch-resistant

Premium Matte-Finish Surface*

Fine-grained texture
Luxurious tactility
No fingerprints

* Thinplus Pro series



OPPLE

Other Brand

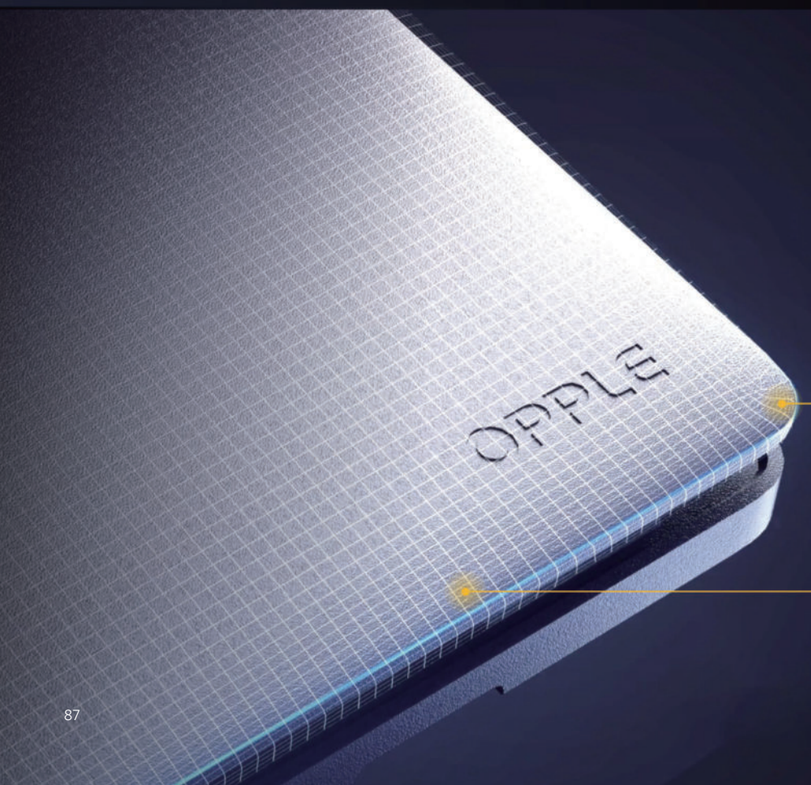

Aesthetic Curve

Seamless visual continuity
Edge-free, effortless touch
Soft, smooth & comfortable feel

G2 chamfer

Micro-arc surface



Avoid Single Pole Insertion



ASP* Shield Socket

Prevent fingers insertion
Child-safe design

*ASP: Avoid Single Pole insertion
Do not insert it with violence force.

Saddle-Type Terminal, Easy Wiring

Convenient wiring
Secure wiring without damage
Stable connection

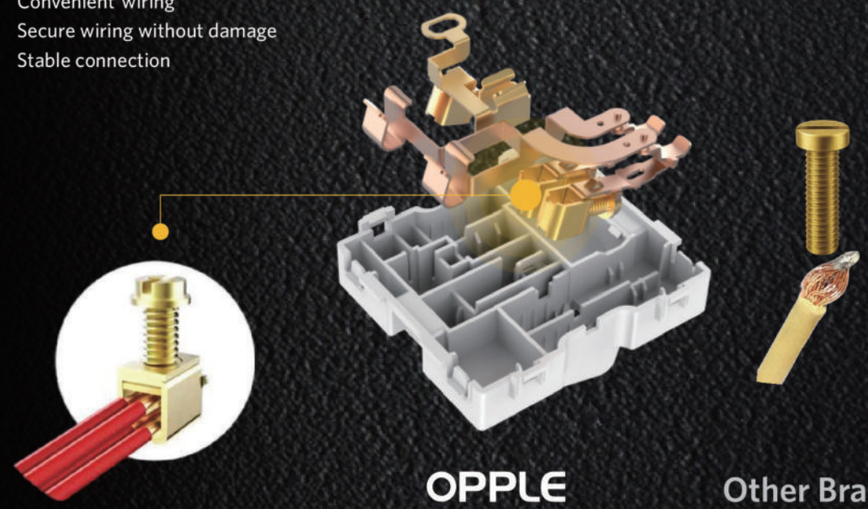

OPPLE

Other Brand

Power Track

Power Track P





Order Name	Power track SKT E 500SUR track+3BS SKT	Power track SKT E 500mm surface track
Power (W)	6250	6250
Rated Voltage (V)	250	250
Rated current (A)	25	25
Dimensions (mm)	500*80*64	500*80*20
Material	PC+AL+Brass	PC+AL+Brass







Order Name	Power track SKT E BS Socket	Power track SKT E US Socket	Power track SKT E A+C USB
Power (W)	3250	4000	Max 20W
Rated Voltage (V)	250	250	5
Rated current (A)	13	16	3
Dimensions (mm)	69*69*44	69*69*44	69*69*44
Material	PC+Brass	PC+Brass	PC+Brass



Ventilation Fan

-Fresh Wind





Fresh Wind-Wall Mount

Order Name	QF-APB15-3A-6inch-WM	QF-APB20-4A-8inch-WM	QF-APB25-5A-10inch-WM	QF-APB30-6A-12inch-WM
Power (W)	30W	35W	40W	45W
Air Volume (m^3/min)	3.6	9	12	17
Noise (dB)	43	45	48	55
Dimensions (mm)	236*236*120	293*293*131	338*338*130	400*400*129
Material	PP	PP	PP	PP



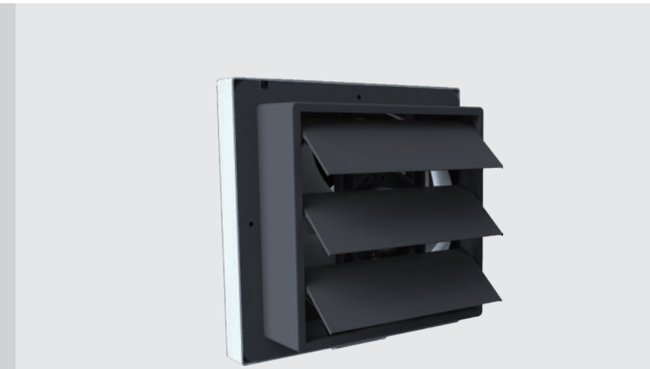





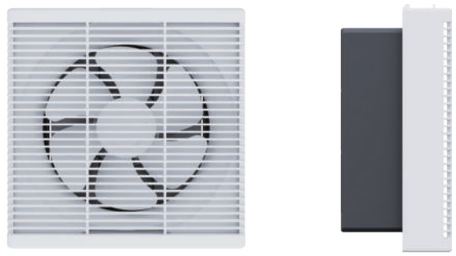

Fresh Wind-Wall Mount (with mask)

Order Name	QF-APB15-3H-6inch-WMM	QF-APB20-4H-8inch-WMM	QF-APB25-5H-10inch-WMM	QF-APB30-6H-12inch-WMM
Power (W)	30W	35W	40W	45W
Air Volume (m^3/min)	3.6	9	12	17
Noise (dB)	43	45	48	55
Dimensions (mm)	236*236*155	293*293*149	338*338*149	400*400*165
Material	PP	PP	PP	PP





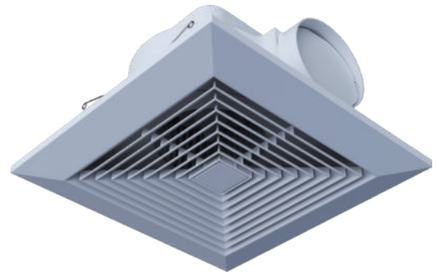

Fresh Wind-Ceiling Mount

Order Name	QF-BPT10-12A-8inch-CM	QF-BPT10-22A-10inch-CM	QF-BPT10-34A-12inch-CM
Power (W)	30W	35W	40W
Air Volume (m^3/min)	2	2.5	3
Noise (dB)	42	48	52
Dimensions (mm)	245*245*170	285*285*163	340*340*163
Material	ABS+PP	ABS+PP	ABS+PP







Fresh Wind-Window Mount

Order Name	QF-APC15-3A-6inch-WinM	QF-APC20-4A-8inch-WinM
Power (W)	15	20
Air Volume (m^3/min)	3.0	4.2
Noise (dB)	44	55
Dimensions (mm)	200*200*65	260*260*80
Material	PP	PP



CEILING LAMP-LIVING ROOM

Series	Picture	SAP Information			Key Data						Product Dimension (mm)				Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Lumen (lm)	CCT (K)	Life (h)	Length	Width	Height	Diameter	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
WindyS 3		525001014900	LEDFSD-E-Rd420-38W-STEP-WH-WindyS 3-GP	LEDFSD-E-Rd420-STEP-WindyS	220-240	50/60	Total:75W Lamp 38W Fan 38W	2600	2700+5700	20000	/	/	340	Φ411 (Sweep Φ880)	4.10	/	/	/	/	5.40	462	462	230	0.0491	5.40	1	600
		525001015000	LEDFSD-E-Rd420-38W-STEP-GD-WindyS 3-GP	LEDFSD-E-Rd420-STEP-WindyS	220-240	50/60	Total:75W Lamp 38W Fan 38W	2600	2700+5700	20000	/	/	340	Φ412 (Sweep Φ880)	3.90	/	/	/	/	5.30	463	463	240	0.0514	5.30	1	600
		525002009400	LEDFSD-E-Rd480-68W-STEP-WH-WindyS 3-GP	LEDFSD-E-Rd480-STEP-WindyS	220-240	50/60	Total:106W Lamp 68W Fan 40W	4800	2700+5700	20000	/	/	349	Φ510 (Sweep Φ1050)	5.70	/	/	/	/	7.20	555	555	232	0.0715	7.20	1	600
		525002009500	LEDFSD-E-Rd480-68W-STEP-GY-WindyS 3-GP	LEDFSD-E-Rd480-STEP-WindyS	220-240	50/60	Total:106W Lamp 68W Fan 40W	4800	2700+5700	20000	/	/	349	Φ510 (Sweep Φ1050)	5.70	/	/	/	/	7.20	555	555	232	0.0715	7.20	1	600
		525005000700	LEDFSD-E-Rd650-90W-STEP-WH-WindyS 3-GP	LEDFSD-E-Rd650-STEP-WindyS	220-240	50/60	Total:136W Lamp 90W Fan 50W	6000	2700+5700	20000	/	/	366	Φ650 (Sweep Φ1320)	10.30	/	/	/	/	13.20	700	700	235	0.1152	13.20	1	600
Black Diamond		521020007110	Pendant-E-250-14W-Black Diamond-GP	HPL250-14W-Black Diamond	220-240	50/60	MAX 14W	/	/	/	/	/	1200	Φ250	0.65	260	230	390	0.0233	0.97	535	475	415	0.1055	3.88	4	1000

CEILING LAMP-BEDROOM

Series	Picture	SAP Information			Key Data						Product Dimension (mm)				Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Lumen (lm)	CCT (K)	Life (h)	Length	Width	Height	Diameter	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
Star Diamond 3		520034047210	LEDCeiling-U3-Rd350-24W-957-Star Diamond	LED HC350 24W Star Diamond	220-240	50/60	24	1800	5700	15000	/	/	59	Φ350	0.41	353	62	357	0.0078	0.53	650	365	380	0.0902	5.30	10	600
		520036006100	LEDCeiling-U3-Rd350-24W-930-Star DMD-PZ	LED HC350 24W Star Diamond	220-240	50/60	24	1800	3000	15000	/	/	59	Φ350	0.41	353	62	357	0.0078	0.53	650	365	380	0.0902	5.30	10	600
		520036006200	LEDCeiling-U3-Rd350-24W-940-Star DMD-PZ	LED HC350 24W Star Diamond	220-240	50/60	24	1800	4000	15000	/	/	59	Φ350	0.41	353	62	357	0.0078	0.53	650	365	380	0.0902	5.30	10	600
		520034047110	LEDCeiling-U3-Rd420-36W-957-Star Diamond	LED HC420 36W Star Diamond	220-240	50/60	36	2800	5700	15000	/	/	68	Φ420	0.46	423	71	428	0.0129	0.61	525	415	430	0.0937	4.90	8	600
YueLing		520036017600	LEDCeiling-E-Rd420-36W-STEP927/957-YL-PZ	LED LED HC420 36W DIM YL	220-240	50/60	36	2520	2700/4000/5700	15000	/	/	72	Φ405	1.04	417	76	419	0.0133	1.65	430	440	444	0.0764	8.26	5	600
QingYu		520036017700	LEDCeiling-E-Rd420-36W-STEP927/957-QY-PZ	LED HC420 36W DIM QY	220-240	50/60	36	2520	2700/4000/5700	15000	/	/	72	Φ435	1.04	455	75	458	0.0156	1.65	468	395	482	0.0891	8.26	5	600
White 4		520034046910	LEDCeiling-U4-Rd350-24W-957-White-GP	LED HC350 24W White	220-240	50/60	24	2000	5700	15000	/	/	50	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
		520034046710	LEDCeiling-U4-Rd420-24W-957-White-GP	LED HC420 24W White	220-240	50/60	24	2000	5700	15000	/	/	59	Φ400	0.45	403	62	408	0.0102	0.60	525	415	430	0.0937	4.80	8	600
		520034047410	LEDCeiling-U4-Rd420-36W-957-White-GP	LED HC420 36W White	220-240	50/60	36	3000	5700	15000	/	/	59	Φ400	0.45	403	62	408	0.0102	0.60	525	415	430	0.0937	4.80	8	600
Beauty		520034047300	LEDCeiling-U-Rd350-24W-957-Beauty-GP	LED HC350 24W Beauty	220-240	50/60	24	1800	5700	15000	/	/	53	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
		520036005900	LEDCeiling-U-Rd350-24W-930-Beauty-GP-PZ	LED HC350 24W Beauty	220-240	50/60	24	1800	3000	15000	/	/	53	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
		520036006000	LEDCeiling-U-Rd350-24W-940-Beauty-GP-PZ	LED HC350 24W Beauty	220-240	50/60	24	1800	4000	15000	/	/	53	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
		520034047010	LEDCeiling-U-Rd420-36W-957-Beauty-GP	LED HC420 36W Beauty	220-240	50/60	36	2800	5700	15000	/	/	61	Φ400	0.45	403	62	408	0.0102	0.60	525	415	430	0.0937	4.80	8	600

CEILING LAMP-COMPACT

Series	Picture	SAP Information			Key Data						Product Dimension (mm)				Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Lumen (lm)	CCT (K)	Life (h)	Length	Width	Height	Diameter	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
Detector 3		520034046810	LED-Rd260-13W-957-Detector 3-Mic-GP	LED HC260 13W DM	220-240	50/60	13	1200	5700	15000	/	/	49	Φ250	0.35	253	52	257	0.0034	0.38	555	520	540	0.1558	15.20	40	600
Star Diamond 3		520033013810	LEDCeiling-U3-Rd260-13W-957-Star Diamond	LED HC260 13W Star Diamond	220-240	50/60	13	1000	5700	15000	/	/	58	Φ270	0.50	273	61	277	0.0046	0.60	560	450	580	0.1462	16.80	28	600
		520034047210	LEDCeiling-U3-Rd350-24W-957-Star Diamond	LED HC350 24W Star Diamond	220-240	50/60	24	1800	5700	15000	/	/	59	Φ350	0.41	353	62	357	0.0078	0.53	650	365	380	0.0902	5.30	10	600
		520036006100	LEDCeiling-U3-Rd350-24W-930-Star DMD-PZ	LED HC350 24W Star Diamond	220-240	50/60	24	1800	3000	15000	/	/	59	Φ350	0.41	353	62	357	0.0078	0.53	650	365	380	0.0902	5.30	10	600
		520036006200	LEDCeiling-U3-Rd350-24W-940-Star DMD-PZ	LED HC350 24W Star Diamond	220-240	50/60	24	1800	4000	15000	/	/	59	Φ350	0.41	353	62	357	0.0078	0.53	650	365	380	0.0902	5.30	10	600
White 4		520033013610	LEDCeiling-U4-Rd260-13W-957-White-GP	LED HC260 13W White	220-240	50/60	13	1200	5700	15000	/	/	49	Φ250	0.35	253	52	257	0.0034	0.38	555	520	285	0.0823	7.60	20	600
		520034046910	LEDCeiling-U4-Rd350-24W-957-White-GP	LED HC350 24W White	220-240	50/60	24	2000	5700	15000	/	/	50	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
Beauty		520033013710	LEDCeiling-U-Rd260-13W-957-Beauty-GP	LED HC260 13W Beauty	220-240	50/60	13	1000	5700	15000	/	/	51	Φ250	0.35	253	52	257	0.0034	0.38	555	520	285	0.0823	7.60	20	600
		520034047300	LEDCeiling-U-Rd350-24W-957-Beauty-GP	LED HC350 24W Beauty	220-240	50/60	24	1800	5700	15000	/	/	53	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
		520036005900	LEDCeiling-U-Rd350-24W-930-Beauty-GP-PZ	LED HC350 24W Beauty	220-240	50/60	24	1800	3000	15000	/	/	53	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600
		520036006000	LEDCeiling-U-Rd350-24W-940-Beauty-GP-PZ	LED HC350 24W Beauty	220-240	50/60	24	1800	4000	15000	/	/	53	Φ330	0.40	333	54	339	0.0061	0.52	575	345	360	0.0714	5.20	10	600

MIRROR LAMP-BATHROOM

Series	Picture	SAP Information			Key Data						Product Dimension (mm)				Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Lumen (lm)	CCT (K)	Life (h)	Length	Width	Height	Diameter	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
Xiaobai		140050864	LED HML549 10W 4000K XIAOBAI IBU	LED HML549 10W	220-240	50/60	10	650	4000	15000	586	64	50	/	0.47	595	70	60	0.0025	0.63	610	300	205	0.03752	7.56	12	600

TABLE LAMP-READING & WORKING

Series	Picture	SAP Information			Key Data						Product Dimension (mm)				Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Lumen (lm)	CCT (K)	Life (h)	Length	Width	Height	Diameter	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
Reader 2		523004009100	LED TL 10W Dim 4000K Reader2Pro WH USBC	LED TL 10W Reader Dim	USB DC5V	50/60	10	770	4000	20000	360	110	420	/	0.73	150	72	439	0.0068	0.95	470	385	459	0.0831	14.18	15	1000

WALL LAMP-OPTIMAL AMBIENCE

Series	Picture	SAP Information			Key Data						Product Dimension (mm)				Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Lumen (lm)	CCT (K)	Life (h)	Length	Width	Height	Diameter	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
Peacock		522003006000	MZB120-5.7W-3000K/4000K/5700K-Peacock	LED HWL 120 5.7W	220-240	50/60	5.7	250	3000 +4000 +5700	15000	/	/	117.5	Φ120	0.691	144	130	200	0.0037	0.90	310	310	155	0.01490	3.61	4	1000

SWITCH AND SOCKET-F01 Series

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Packing Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600002007900	F011611A-Switch Set-1G1W-WH-GP	F011611A	16AX 250V~	White	120	70	32	0.0480	175	155	135	0.0036619	0.0540	700	325	190	0.0432250	5.40	100	1000
	600002005800	F011612A-Switch Set-1G2W-WH-GP	F011612A	16AX 250V~	White	120	70	32	0.0620	175	155	135	0.0036619	0.0680	700	325	190	0.0432250	6.80	100	1000
	600002006800	F018401A-Switch Set-Doorbell-1G-WH-GP	F018401A	16A 250V~	White	120	70	32	0.0580	175	155	135	0.0036619	0.0640	700	325	190	0.0432250	6.40	100	1000
	600002005700	F011621A-Switch Set-2G1W-WH-GP	F011621A	16AX 250V~	White	120	70	32	0.0770	175	155	135	0.0036619	0.0830	700	325	190	0.0432250	8.30	100	1000
	600002006700	F011622A-Switch Set-2G2W-WH-GP	F011622A	16AX 250V~	White	120	70	32	0.1050	175	155	135	0.0036619	0.1110	700	325	190	0.0432250	11.10	100	1000
	600002008200	F011631A-Switch Set-3G1W-WH-GP	F011631A	16AX 250V~	White	120	70	32	0.0930	175	155	135	0.0036619	0.0990	700	325	190	0.0432250	9.90	100	1000
	600002005600	F011632A-Switch Set-3G2W-WH-GP	F011632A	16AX 250V~	White	120	70	32	0.1330	175	155	135	0.0036619	0.1390	700	325	190	0.0432250	13.90	100	1000
	600002007100	F01167U-Outlet set-US-1G-WH-GP	F01167U	16A 250V~	White	120	70	32	0.0780	175	155	135	0.0036619	0.0840	700	325	190	0.0432250	8.40	100	1000
	600002008100	F01167U2-Outlet Set-US-2G-WH-GP	F01167U2	16A 250V~	White	120	70	32	0.0750	175	155	135	0.0036619	0.0810	700	325	190	0.0432250	8.10	100	1000
	600002006000	F01207-Outlet Set-AirCon-20A-1G-WH-GP	F01207	20A 250V~	White	120	70	30	0.0755	175	155	135	0.0036619	0.0817	700	325	190	0.0432250	8.17	100	1000
	600002007000	F011699-Outlet Set-Universe-1G-WH-GP	F011699	10A 250V~	White	120	70	40	0.0978	175	155	135	0.0036619	0.1055	700	325	190	0.0432250	8.44	80	1000
	600002008400	F016901-Outlet Set-Computer-1G-WH-GP	F016901	CAT6(6P6C)	White	120	70	35	0.0510	175	155	135	0.0036619	0.0580	700	325	190	0.0432250	5.22	90	1000
	600002005900	F016201-Outlet Set-Telephone-1G-WH-GP	F016201	4 pins	White	120	70	35	0.0500	175	155	135	0.0036619	0.0560	700	325	190	0.0432250	5.60	100	1000
	600002007300	F016101-Outlet Set-F Head TV-1G-WH-GP	F016101	5-850MHZ	White	120	70	35	0.0520	175	155	135	0.0036619	0.0580	700	325	190	0.0432250	5.80	100	1000
	600002008300	F016502-Outlet Set-Tel and PC-WH-GP	F016502	4 pins CAT6(6P6C)	White	120	70	35	0.0610	175	155	135	0.0036619	0.0680	700	325	190	0.0432250	6.12	90	1000
	600002006200	F018501-Outlet Set-USB-2.4A-WH-GP	F018501	5V 2.4A	White	120	70	42	0.0900	175	155	135	0.0036619	0.0960	700	325	190	0.0432250	6.72	70	1000
	600002007200	F018101-Switch Set-Dier-300W-WH-GP	F018101	200-240V~ 30-300W	White	120	70	55	0.0980	175	155	135	0.0036619	0.1037	700	325	190	0.0432250	5.19	50	1000
	600002008600	F011611A-Switch Set-1G1W-DG-GP	F011611A	16AX 250V~	Dark Gray	120	70	32	0.0480	175	155	135	0.0036619	0.0540	700	325	190	0.0432250	5.40	100	1000
	600002006100	F011612A-Switch Set-1G2W-DG-GP	F011612A	16AX 250V~	Dark Gray	120	70	32	0.0620	175	155	135	0.0036619	0.0680	700	325	190	0.0432250	6.80	100	1000
	600002007500	F018401A-Switch Set-Doorbell-1G-DG-GP	F018401A	16A 250V~	Dark Gray	120	70	32	0.0580	175	155	135	0.0036619	0.0640	700	325	190	0.0432250	6.40	100	1000
	600002008500	F011621A-Switch Set-2G1W-DG-GP	F011621A	16AX 250V~	Dark Gray	120	70	32	0.0770	175	155	135	0.0036619	0.0830	700	325	190	0.0432250	8.30	100	1000
	600002006400	F011622A-Switch Set-2G2W-DG-GP	F011622A	16AX 250V~	Dark Gray	120	70	32	0.1050	175	155	135	0.0036619	0.1110	700	325	190	0.0432250	11.10	100	1000
	600002007400	F011631A-Switch Set-3G1W-DG-GP	F011631A	16AX 250V~	Dark Gray	120	70	32	0.0930	175	155	135	0.0036619	0.0990	700	325	190	0.0432250	9.90	100	1000
	600002008800	F011632A-Switch Set-3G2W-DG-GP	F011632A	16AX 250V~	Dark Gray	120	70	32	0.1330	175	155	135	0.0036619	0.1390	700	325	190	0.0432250	13.90	100	1000
	600002006300	F01167U-Outlet Set-US-1G-DG-GP	F01167U	16A 250V~	Dark Gray	120	70	32	0.0780	175	155	135	0.0036619	0.0840	700	325	190	0.0432250	8.40	100	1000
	600002007700	F01167U2-Outlet Set-US-2G-DG-GP	F01167U2	16A 250V~	Dark Gray	120	70	32	0.0750	175	155	135	0.0036619	0.0810	700	325	190	0.0432250	8.10	100	1000
	600002008700	F01207-Outlet Set-AirCon-20A-1G-DG-GP	F01207	20A 250V~	Dark Gray	120	70	30	0.0755	175	155	135	0.0036619	0.0817	700	325	190	0.0432250	8.17	100	1000
	600002006600	F011699-Outlet Set-Universe-1G-DG-GP	F011699	10A 250V~	Dark Gray	120	70	40	0.0978	175	155	135	0.0036619	0.1055	700	325	190	0.0432250	8.44	80	1000
	600002007600	F016901-Outlet Set-Computer-1G-DG-GP	F016901	CAT6(6P6C)	Dark Gray	120	70	35	0.0510	175	155	135	0.0036619	0.0580	700	325	190	0.0432250	5.22	90	1000
	600002009000	F016201-Outlet Set-Telephone-1G-DG-GP	F016201	4 pins	Dark Gray	120	70	35	0.0500	175	155	135	0.0036619	0.0558	700	325	190	0.0432250	5.58	100	1000
	600002006500	F016101-Outlet Set-F Head TV-1G-DG-GP	F016101	5-850MHZ	Dark Gray	120	70	35	0.0520	175	155	135	0.0036619	0.0580	700	325	190	0.0432250	5.80	100	1000
	600002008000	F016502-Outlet Set-Tel and PC-DG-GP	F016502	4 pins CAT6(6P6C)	Dark Gray	120	70	35	0.0610	175	155	135	0.0036619	0.0750	700	325	190	0.0432250	6.75	90	1000
	600002008900	F018501-Outlet Set-USB-2.4A-DG-GP	F018501	5V 2.4A	Dark Gray	120	70	42	0.0900	175	155	135	0.0036619	0.0960	700	325	190	0.0432250	6.72	70	1000
	600002006900	F018101-Switch Set-Dier-300W-DG-GP	F018101	200-240V~ 30-300W	Dark Gray	120	70	55	0.0980	175	155	135	0.0036619	0.1037	700	325	190	0.0432250	5.19	50	1000

SWITCH AND SOCKET-F01 Frame & Function Module

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Packing Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600002004700	F015910-Plate-1M-WH-GP	F015910	120*70	White	120	70	8.8	0.0394	145	138	90	0.00180	0.0456	470	290	160	0.0218	4.56	100	1000
	600002003600	F015920-Plate-2M-WH-GP	F015920	120*70	White	120	70	8.8	0.0389	145	138	90	0.00180	0.0451	470	290	160	0.0218	4.51	100	1000
	600002003700	F015921-Plate-2X-1M-WH-GP	F015921	120*70	White	120	70	8.8	0.0391	145	138	90	0.00180	0.0453	470	290	160	0.0218	4.53	100	1000
	600002002700	F015930-Plate-3M-WH-GP	F015930	120*70	White	120	70	8.8	0.0373	145	138	90	0.00180	0.0435	470	290	160	0.0218	4.35	100	1000
	600002000900	F015940-Plate-4X-1M-WH-GP	F015940	120*116	White	120	120	8.8	0.0573	145	140	140	0.00284	0.0635	720	300	160	0.0346	6.35	100	1000
	600002001300	F015960-Plate-2X-3M-WH-GP	F015960	120*116	White	120	120	8.8	0.0543	145	140	140	0.00284	0.0605	720	300	160	0.0346	6.05	100	1000
	600002005200	F01G31A-Switch-1G1W-1M-WH-GP	F01G31A	16AX 250V~	White	25	44	31	0.0185	180	115	40	0.00083	0.0247	270	215	150	0.0087	2.47	100	1000
	600002003100	F01G32A-Switch-1G2W-1M-WH-GP	F01G32A	16AX 250V~	White	25	44	31	0.0318	180	115	40	0.00083	0.0380	270	215	150	0.0087	3.80	100	1000
	600002002900	F01G11A-Switch-1G1W-3M-WH-GP	F01G11A	16AX 250V~	White	70	44	31	0.0108	170	155	60	0.00158	0.0170	320	320	185	0.0189	1.70	100	1000
	600002000400	F01G12A-Switch-1G2W-3M-WH-GP	F01G12A	16AX 250V~	White	70	44	31	0.0246	170	155	60	0.00158	0.0308	320	320	185	0.0189	3.08	100	1000
	600002004600	F01G21A-Switch-1G1W-1.5M-WH-GP	F01G21A	16AX 250V~	White	34.5	44	31	0.0200	170	155	60	0.00158	0.0262	320	320	185	0.0189	2.62	100	1000
	600002003300	F01G80-Socket-2 pin-1M-WH-GP	F01G80	16A 250V~	White	23	44	31	0.0218	180	115	40	0.00083	0.0280	245	220	195	0.0105	2.80	100	1000
	600002001900	F01G7U-Socket-US-3-pin-2M-WH-GP	F01G7U	16A 250V~	White	46	44	29.5	0.0360	165	120	65	0.00129	0.0422	345	225	180	0.0158	4.22	100	1000
	600002002400	F01G7U2-Socket-US-3-pin-3M-WH-GP	F01G7U2	16A 250V~	White	70	44	29.5	0.0528	170	155	60	0.00158	0.0590	320	320	185	0.0189	5.90	100	1000
	600002004800	F01G99-Socket-Universe-3-pin-2M-WH-GP	F01G99	10A 250V~	White	46	44	40	0.0393	240	70	70	0.00118	0.0517	370	155	255	0.0146	2.59	50	1000
	600002004200	F015910-Plate-1M-DG-GP	F015910	120x70	Dark Gray	120	70	8.8	0.0394	145	138	90	0.00180	0.0456	470	290	160	0.0218	4.56	100	1000
	600002001700	F015920-Plate-2M-DG-GP	F015920	120x70	Dark Gray	120	70	8.8	0.0389	145	138	90	0.00180	0.0451	470	290	160	0.0218	4.51	100	1000
	600002000800	F015921-Plate-2X-1M-DG-GP	F015921	120 × 70	Dark Gray	120	70	8.8	0.0391	145	138	90	0.00180	0.0453	470	290	160	0.0218	4.53	100	1000
	600002001600	F015930-Plate-3M-DG-GP	F015930	120 × 70	Dark Gray	120	70	8.8	0.0373	145	138	90	0.00180	0.0435	470	290	160	0.0218	4.35	100	1000
	600002004400	F015940-Plate-4X-1M-DG-GP	F015940	120 × 116	Dark Gray	120	120	8.8	0.0573	145	140	140	0.00284	0.0635	720	300	160	0.0346	6.35	100	1000
	600002003400	F015960-Plate-2X-3M-DG-GP	F015960	120 × 116	Dark Gray	120	120	8.8	0.0543	145	140	140	0.00284	0.0605	720	300	160	0.0346	6.05	100	1000
	600002003800	F01G31A-Switch-1G1W-1M-DG-GP	F01G31A	16AX 250V~	Dark Gray	25	44	31	0.0185	180	115	40	0.00083	0.0247	270	215	150	0.0087	2.47	100	1000
	600002001800	F01G32A-Switch-1G2W-1M-DG-GP	F01G32A	16AX 250V~	Dark Gray	25	44	31	0.0318	180	115	40	0.00083	0.0380	270	215	150	0.0087	3.80	100	1000
	600002001100	F01G11A-Switch-1G1W-3M-DG-GP	F01G11A	16AX 250V~	Dark Gray	70	44	31	0.0108	170	155	60	0.00158	0.0170	320	320	185	0.0189	1.70	100	1000
	600002005300	F01G12A-Switch-1G2W-3M-DG-GP	F01G12A	16AX 250V~	Dark Gray	70	44	31	0.0246	170	155	60	0.00158	0.0308	320	320	185	0.0189	3.08	100	1000
	600002003500	F01G21A-Switch-1G1W-1.5M-DG-GP	F01G21A	16AX 250V~	Dark Gray	34.5	44	31	0.0200	170	155	60	0.00158	0.0262	320	320	185	0.0189	2.62	100	1000
	600002002600	F01G80-Socket-2-pin-1M-DG-GP	F01G80	16A 250V~	Dark Gray	23	44	31	0.0218	180	115	40	0.00083	0.0280	245	220	195	0.0105	2.80	100	1000

SWITCH AND SOCKET-F01 Frame & Function Module

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Packing Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600002000500	F01G7U-Socket-US-3-pin-2M-DG-GP	F01G7U	16A 250V~	Dark Gray	46	44	29.5	0.0360	165	120	65	0.00129	0.0422	345	255	180	0.0158	4.22	100	1000
	600002001200	F01G7U2-Socket-US-2×3-pin-3M-DG-GP	F01G7U2	16A 250V~	Dark Gray	70	44	29.5	0.0528	170	155	60	0.00158	0.0590	320	320	185	0.0189	5.90	100	1000
	600002003000	F01G99-Socket-Universe-2M-DG-GP	F01G99	10A 250V~	Dark Gray	46	44	40	0.0393	240	70	70	0.00118	0.0517	370	155	255	0.0146	2.59	50	1000
	600002002300	F015305-Waterproof Cover-H-GY-GP	F015305	IP55	Gray	139	101	35	0.1512	173	120	155	0.00322	0.1636	625	325	190	0.0386	8.18	50	1000
	600002001500	F015306-Waterproof Cover-V-GY-GP	F015306	IP13	Gray	133	75	20	0.0925	173	120	155	0.00322	0.1003	625	325	190	0.0386	8.02	80	1000
	600002007800	D081096TG-Floor Receptacle-2×3-pin-SG-GP	D081096TG	10A 250V~	Silver Gray	120	120	61	0.9888	150	150	100	0.00225	1.1685	520	315	165	0.0270	11.69	10	1000

SWITCH AND SOCKET-F02 Series White

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000249400	F021611A-Switch-1G1W-16A-WH-GP	F021611A	16AX 250V~	White	86	88	40	0.0671	195	160	100	0.00312	0.0848	510	340	210	0.036414	8.479	100	1000
	600000248300	F021612A-Switch-1G2W-16A-WH-GP	F021612A	16AX 250V~	White	86	88	40	0.0696	195	160	100	0.00312	0.0873	510	340	210	0.036414	8.732	100	1000
	600000510700	F021014A-Switch-1G4W-10A-WH-GP	F021014A	10AX 250V~	White	86	88	36	0.1169	195	186	98	0.00355	0.1363	510	395	215	0.043312	13.630	100	1000
	600000247600	F021621A-Switch-2G1W-16A-WH-GP	F021621A	16AX 250V~	White	86	88	40	0.0819	195	160	100	0.00312	0.0996	510	340	210	0.036414	9.960	100	1000
	600000247700	F021622A-Switch-2G2W-16A-WH-GP	F021622A	16AX 250V~	White	86	88	40	0.0852	195	160	100	0.00312	0.1029	510	340	210	0.036414	10.286	100	1000
	600000246600	F021631A-Switch-3G1W-16A-WH-GP	F021631A	16AX 250V~	White	86	88	40	0.0950	195	160	100	0.00312	0.1127	510	340	210	0.036414	11.266	100	1000
	600000250100	F021632A-Switch-3G2W-16A-WH-GP	F021632A	16AX 250V~	White	86	88	40	0.1004	195	160	100	0.00312	0.1181	510	340	210	0.036414	11.813	100	1000
	600000248900	F021641A-Switch-4G1W-16A-WH-GP	F021641A	16AX 250V~	White	86	88	40	0.1018	195	160	100	0.00312	0.1195	510	340	210	0.036414	11.952	100	1000
	600000249700	F021642A-Switch-4G2W-16A-WH-GP	F021642A	16AX 250V~	White	86	88	40	0.1096	195	160	100	0.00312	0.1273	510	340	210	0.036414	12.730	100	1000
	600002010100	F021041AX-Switch-4G1W-10A-WH-GP	F021041AX	10AX 250V~	White	146	88	36	0.1627	195	186	98	0.00355	0.1875	510	395	215	0.043312	11.250	60	1000
	600002010200	F021061AX-Switch-6G1W-10A-WH-GP	F021061AX	10AX 250V~	White	146	88	36	0.2228	195	186	98	0.00355	0.2478	510	395	215	0.043312	14.868	60	1000
	600000510600	F021025A-Window Curtain Switch-10A-WH-GP	F021025A	10A 250V~	White	86	88	44	0.0957	195	186	98	0.00355	0.1139	510	395	215	0.043312	11.390	100	1000
	600000247200	F028401A-Switch-Doorbell-16A-WH-GP	F028401A	16A 250V~	White	86	88	40	0.0681	195	160	100	0.00312	0.0858	510	340	210	0.036414	8.577	100	1000
	600000246100	F022013A-Switch-Neon-2 Pole-20A-WH-GP	F022013A	20A 250V~	White	86	88	25	0.0822	195	160	100	0.00312	0.0999	510	340	210	0.036414	9.985	100	1000
	600000246400	F024513A-Switch-Neon-2 Pole-45A-WH-GP	F024513A	45A 250V~	White	86	88	30	0.1192	195	160	100	0.00312	0.1369	510	340	210	0.036414	13.689	100	1000
	600002010600	F024513AX-Switch-Neon-DP-45A-WH-GP	F024513AX	45A 250V~	White	146	88	33	0.2030	195	186	98	0.00355	0.2278	510	395	215	0.043312	13.668	60	1000
	600002010500	F024574AX-Switch-Neon-DP-45A-BS-13A-WHGP	F024574AX	45A 250V~ 13A 250V~	White	146	88	33	0.2359	195	186	98	0.00355	0.2607	510	395	215	0.043312	15.642	60	1000
	600000251000	F021371A-Switched SKT-Neon-BS-13A-WH-GP	F021371A	13A 250V~	White	86	88	30	0.0824	195	160	100	0.00312	0.1001	510	340	210	0.036414	10.009	100	1000
	600000248600	F021374A-Switched SKT-Neon-BS-13A-WH-GP	F021374A	13A 250V~	White	86	88	30	0.0835	195	160	100	0.00312	0.1012	510	340	210	0.036414	10.122	100	1000
	600000384900	F0213785-Socket-20W-PD-2USB-BS-13A-WH-GP	F0213785	13A 250V~ 20W	White	86	88	41	0.1120	195	160	100	0.00312	0.1342	510	340	210	0.036414	10.739	80	1000
	600000384600	F021375A-Switched SKT-Neon-BS-2*13A-WHGP	F021375A	13A 250V~	White	146	88	32	0.1560	195	160	100	0.00312	0.1772	510	340	210	0.036414	10.634	60	1000
	600002010300	F0213785X-SKT-20WPD-2USB-DP-BS2*13A-WHGP	F0213785X	13A 250V~ 5V 2.1A	White	146	88	39	0.2141	195	186	98	0.00355	0.2390	510	395	215	0.043312	14.340	60	1000
	600000247400	F021572A-Switched SKT-Neon-R-3P15A-WH-GP	F021572A	15A 250V~	White	86	88	35	0.0813	195	160	100	0.00312	0.0990	510	340	210	0.036414	9.901	100	1000
	600000247900	F021691A-Switched SKT-Neon-GL-3P16A-WHGP	F021691A	16A 250V~	White	86	88	35	0.0762	195	160	100	0.00312	0.0939	510	340	210	0.036414	9.390	100	1000
	600000245700	F021681A-Switched SKT-GL-5P-16A-WH-GP	F021681A	16A 250V~	White	86	88	35	0.0840	195	160	100	0.00312	0.1016	510	340	210	0.036414	10.164	100	1000
	600000250600	F021682A-Switched SKT-1G2W-GL-5P16A-WHGP	F021682A	16AX 250V~ / 16A 250V~	White	86	88	35	0.0879	195	160	100	0.00312	0.1056	510	340	210	0.036414	10.561	100	1000
	600000250900	F021685-Switched SKT-USB-GL-5P-16A-WH-GP	F021685	16A 250V~ 2.4A 5V	White	86	88	39	0.1039	195	160	100	0.00312	0.1251	510	340	210	0.036414	10.012	80	1000
	600000249900	F02167G-Switch-Schuko-16A-WH-GP	F02167G	16A 250V~	White	86	88	39	0.0754	195	160	100	0.00312	0.0966	510	340	210	0.036414	7.730	80	1000
	600000510500	F02457C-Cable Outlet-45A Terminal-WH-GP	F02457C	45A 250V	White	86	88	45	0.1036	195	186	98	0.00355	0.1224	510	395	215	0.043312	9.792	80	1000
	600000246900	F026201-Telephone Outlet-WH-GP	F026201	4 lines	White	86	88	35	0.0544	195	160	100	0.00312	0.0721	510	340	210	0.036414	7.213	100	1000
	600000245900	F026401-Computer Outlet-WH-GP	F026401	CAT6(6P6C)	White	86	88	35	0.0548	195	160	100	0.00312	0.0725	510	340	210	0.036414	7.250	100	1000
	600000246200	F026101-TV Outlet-WH-GP	F026101	5-850MHZ	White	86	88	29	0.0582	195	160	100	0.00312	0.0759	510	340	210	0.036414	7.586	100	1000
	600000251100	F026502-Tel+Computer Outlet-WH-GP	F026502	4 lines CAT6(6P6C)	White	86	88	35	0.0580	195	160	100	0.00312	0.0757	510	340	210	0.036414	7.569	100	1000
	600000249000	F026501-TV+compter Outlet-WH-GP	F026501	5-850MHZ CAT6(6P6C)	White	86	88	35	0.0630	195	160	100	0.00312	0.0806	510	340	210	0.036414	8.064	100	1000

SWITCH AND SOCKET-F02 Series White

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000249500	F026402-Computer Outlet-2G-WH-GP	F026402	CAT6(6P6C)	White	86	88	35	0.0584	195	160	100	0.00312	0.0761	510	340	210	0.036414	7.607	100	1000
	600000248400	F025401-Blank-WH-GP	F025401	/	White	86	88	14	0.0376	195	160	100	0.00312	0.0482	510	340	210	0.036414	9.647	200	1000
	600002010400	F025401X-Blank-WH-GP	F025401X	/	White	146	88	12	0.1040	195	186	98	0.00355	0.1150	510	395	215	0.043312	18.400	160	1000
	600000245800	F028101-Dimmer Switch-630W-WH-GP	F028101	630W 250V~	White	86	88	43	0.0910	195	160	100	0.00312	0.1122	510	340	210	0.036414	8.979	80	1000
	600000250300	F028201-Fan Control-300W-WH-GP	F028201	300W 250V~	White	86	88	43	0.0917	195	160	100	0.00312	0.1129	510	340	210	0.036414	9.031	80	1000
	600000250700	F023067-Key Card Switch-20A-WH-GP	F023067	20A 250V~	White	86	88	44	0.1207	195	160	100	0.00312	0.1419	510	340	210	0.036414	11.352	80	1000
	600000403700	F026503-SATV+Computer Outlet-WH-GP	F026503	950-2150MHZ CAT6(6P6C)	White	86	88	40	0.0622	195	160	100	0.00312	0.0799	510	340	210	0.036414	7.989	100	1000
	600000404000	F026102-Satellite TV Outlet-WH-GP	F026102	950-2150MHZ	White	86	88	35	0.0481	195	160	100	0.00312	0.0658	510	340	210	0.036414	6.579	100	1000

SWITCH AND SOCKET-F02 Series Gold

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000249600	F021611A-Switch-1G1W-16A-GD-GP	F021611A	16AX 250V~	Gold	86	88	40	0.0671	195	160	100	0.00312	0.0848	510	340	210	0.036414	8.479	100	1000
	600000247000	F021612A-Switch-1G2W-16A-GD-GP	F021612A	16AX 250V~	Gold	86	88	40	0.0696	195	160	100	0.00312	0.0873	510	340	210	0.036414	8.732	100	1000
	600000511300	F021014A-Switch-1G4W-10A-GD-GP	F021014A	10AX 250V~	Gold	86	88	36	0.1169	195	186	98	0.00355	0.1363	510	395	215	0.043312	13.630	100	1000
	600000248000	F021621A-Switch-2G1W-16A-GD-GP	F021621A	16AX 250V~	Gold	86	88	40	0.0819	195	160	100	0.00312	0.0996	510	340	210	0.036414	9.960	100	1000
	600000246800	F021622A-Switch-2G2W-16A-GD-GP	F021622A	16AX 250V~	Gold	86	88	40	0.0852	195	160	100	0.00312	0.1029	510	340	210	0.036414	10.286	100	1000
	600000250200	F021631A-Switch-3G1W-16A-GD-GP	F021631A	16AX 250V~	Gold	86	88	40	0.0950	195	160	100	0.00312	0.1127	510	340	210	0.036414	11.266	100	1000
	600000249100	F021632A-Switch-3G2W-16A-GD-GP	F021632A	16AX 250V~	Gold	86	88	40	0.1004	195	160	100	0.00312	0.1181	510	340	210	0.036414	11.813	100	1000
	600000249200	F021641A-Switch-4G1W-16A-GD-GP	F021641A	16AX 250V~	Gold	86	88	40	0.1018	195	160	100	0.00312	0.1195	510	340	210	0.036414	11.952	100	1000
	600000248200	F021642A-Switch-4G2W-16A-GD-GP	F021642A	16AX 250V~	Gold	86	88	40	0.1096	195	160	100	0.00312	0.1273	510	340	210	0.036414	12.730	100	1000
	600002010700	F021041AX-Switch-4G1W-10A-GD-GP	F021041AX	10AX 250V~	Gold	146	88	36	0.1627	195	186	98	0.00355	0.1875	510	395	215	0.043312	11.250	60	1000
	600002009300	F021061AX-Switch-6G1W-10A-GD-GP	F021061AX	10AX 250V~	Gold	146	88	36	0.2228	195	186	98	0.00355	0.2478	510	395	215	0.043312	14.868	60	1000
	600000510900	F021025A-Window Curtain Switch-10A-GD-GP	F021025A	10A 250V~	Gold	86	88	44	0.0957	195	186	98	0.00355	0.1139	510	395	215	0.043312	11.390	60	1000
	600000245600	F028401A-Switch-Doorbell-16A-GD-GP	F028401A	16A 250V~	Gold	86	88	40	0.0681	195	160	100	0.00312	0.0858	510	340	210	0.036414	8.577	100	1000
	600000250400	F022013A-Switch-Neon-2 Pole-20A-GD-GP	F022013A	20A 250V~	Gold	86	88	25	0.0822	195	160	100	0.00312	0.0999	510	340	210	0.036414	9.985	100	1000
	600000251200	F024513A-Switch-Neon-2 Pole-45A-GD-GP	F024513A	45A 250V~	Gold	86	88	30	0.1192	195	160	100	0.00312	0.1369	510	340	210	0.036414	13.689	100	1000
	600002009900	F024513AX-Switch-Neon-DP-45A-GD-GP	F024513AX	45A 250V~	Gold	146	88	33	0.2030	195	186	98	0.00355	0.2278	510	395	215	0.043312	13.668	60	1000
	600002010800	F024574AX-Switch-Neon-DP-45A-BS-13A-GDGP	F024574AX	45A 250V~ 13A 250V~	Gold	146	88	33	0.2359	195	186	98	0.00355	0.2607	510	395	215	0.043312	15.642	60	1000
	600000248700	F021371A-Switched SKT-Neon-BS-13A-GD-GP	F021371A	13A 250V~	Gold	86	88	30	0.0824	195	160	100	0.00312	0.1001	510	340	210	0.036414	10.009	100	1000
	600000247500	F021374A-Switched SKT-Neon-BS-13A-GD-GP	F021374A	13A 250V~	Gold	86	88	30	0.0835	195	160	100	0.00312	0.1012	510	340	210	0.036414	10.122	100	1000
	600000384800	F0213785-Socket-20W-PD-2USB-BS-13A-GD-GP	F0213785	13A 250V~ 20W	Gold	86	88	41	0.1120	195	160	100	0.00312	0.1342	510	340	210	0.036414	10.739	80	1000

SWITCH AND SOCKET-F02 Series Gold

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000384500	F021375A-Switched SKT-Neon-BS-2*13A-GDGP	F021375A	13A 250V~	Gold	146	88	32	0.1560	195	160	100	0.00312	0.1772	510	340	210	0.036414	10.634	60	1000
	600002009400	F0213785X-SKT-20WPD-2USB-DP-BS2*13A-GDGP	F0213785X	13A 250V~ 5V 2.1	Gold	146	88	39	0.2141	195	186	98	0.00355	0.2390	510	395	215	0.043312	14.340	60	1000
	600000248100	F021572A-Switched SKT-Neon-R-3P15A-GD-GP	F021572A	15A 250V~	Gold	86	88	35	0.0813	195	160	100	0.00312	0.0990	510	340	210	0.036414	9.901	100	1000
	600000246500	F021691A-Switched SKT-Neon-GL-3P16A-GDGP	F021691A	16A 250V~	Gold	86	88	35	0.0762	195	160	100	0.00312	0.0939	510	340	210	0.036414	9.390	100	1000
	600000250000	F021681A-Switched SKT-GL-5P-16A-GD-GP	F021681A	16A 250V~	Gold	86	88	35	0.0840	195	160	100	0.00312	0.1016	510	340	210	0.036414	10.164	100	1000
	600000248800	F021682A-Switched SKT-1G2W-GL-5P16A-GDGP	F021682A	16AX 250V~ / 16A 250V~	Gold	86	88	35	0.0879	195	160	100	0.00312	0.1056	510	340	210	0.036414	10.561	100	1000
	600000249300	F021685-Switched SKT-2USB-GL-5P16A-GD-GP	F021685	16A 250V~ 2.4A 5V	Gold	86	88	39	0.1039	195	160	100	0.00312	0.1251	510	340	210	0.036414	10.012	80	1000
	600000247100	F02167G-Switch-Schuko-16A-GD-GP	F02167G	16A 250V~	Gold	86	88	39	0.0754	195	160	100	0.00312	0.0966	510	340	210	0.036414	7.730	80	1000
	600000511200	F02457C-Cable Outlet-45A Terminal-GD-GP	F02457C	45A 250V~	Gold	86	88	45	0.1036	195	186	98	0.00355	0.1224	510	395	215	0.043312	9.792	80	1000
	600000246000	F026201-Telephone Outlet-GD-GP	F026201	4 lines	Gold	86	88	35	0.0544	195	160	100	0.00312	0.0721	510	340	210	0.036414	7.213	100	1000
	600000246300	F026401-Computer Outlet-GD-GP	F026401	CAT6(6P6C)	Gold	86	88	35	0.0548	195	160	100	0.00312	0.0725	510	340	210	0.036414	7.250	100	1000
	600000251300	F026101-TV Outlet-GD-GP	F026101	5-850MHZ	Gold	86	88	29	0.0582	195	160	100	0.00312	0.0759	510	340	210	0.036414	7.586	100	1000
	600000248500	F026502-Tel+Computer Outlet-GD-GP	F026502	4 lines CAT6(6P6C)	Gold	86	88	35	0.0580	195	160	100	0.00312	0.0757	510	340	210	0.036414	7.569	100	1000
	600000247300	F026501-TV+compter Outlet-GD-GP	F026501	5-850MHZ CAT6(6P6C)	Gold	86	88	35	0.0630	195	160	100	0.00312	0.0806	510	340	210	0.036414	8.064	100	1000
	600000247800	F026402-Computer Outlet-2G-GD-GP	F026402	CAT6(6P6C)	Gold	86	88	35	0.0584	195	160	100	0.00312	0.0761	510	340	210	0.036414	7.607	100	1000
	600000246700	F025401-Blank-GD-GP	F025401	/	Gold	86	88	14	0.0376	195	160	100	0.00312	0.0482	510	340	210	0.036414	9.647	200	1000
	600002011400	F025401X-Blank-GD-GP	F025401X	/	Gold	146	88	12	0.1040	195	186	98	0.00355	0.1150	510	395	215	0.043312	18.400	160	1000
	600000250500	F028101-Dimmer Switch-630W-GD-GP	F028101	630W 250V~	Gold	86	88	43	0.0910	195	160	100	0.00312	0.1122	510	340	210	0.036414	8.979	80	1000
	600000250800	F028201-Fan Control-300W-GD-GP	F028201	300W 250V~	Gold	86	88	43	0.0917	195	160	100	0.00312	0.1129	510	340	210	0.036414	9.031	80	1000
	600000249800	F023067-Key Card Switch-20A-GD-GP	F023067	20A 250V~	Gold	86	88	44	0.1207	195	160	100	0.00312	0.1419	510	340	210	0.036414	11.352	80	1000
	600000403600	F026503-SATV+Computer Outlet-GD-GP	F026503	950-2150MHZ CAT6(6P6C)	Gold	86	88	40	0.0622	195	160	100	0.00312	0.0799	510	340	210	0.036414	7.989	100	1000
	600000403900	F026102-Satellite TV Outlet-GD-GP	F026102	950-2150MHZ	Gold	86	88	35	0.0481	195	160	100	0.00312	0.0658	510	340	210	0.036414	6.579	100	1000

SWITCH AND SOCKET-F02 Series Silver Gray

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000381800	F021611A-Switch-1G1W-16A-GY-GP	F021611A	16AX 250V~	Silver Gray	86	88	40	0.0671	195	160	100	0.00312	0.0848	510	340	210	0.036414	8.479	100	1000
	600000381900	F021612A-Switch-1G2W-16A-GY-GP	F021612A	16AX 250V~	Silver Gray	86	88	40	0.0696	195	160	100	0.00312	0.0873	510	340	210	0.036414	8.732	100	1000
	600000511600	F021014A-Switch-1G4W-10A-GY-GP	F021014A	10AX 250V~	Silver Gray	86	88	36	0.1169	195	186	98	0.00355	0.1363	510	395	215	0.043312	13.630	100	1000
	600000382000	F021621A-Switch-2G1W-16A-GY-GP	F021621A	16AX 250V~	Silver Gray	86	88	40	0.0819	195	160	100	0.00312	0.0996	510	340	210	0.036414	9.960	100	1000
	600000382100	F021622A-Switch-2G2W-16A-GY-GP	F021622A	16AX 250V~	Silver Gray	86	88	40	0.0852	195	160	100	0.00312	0.1029	510	340	210	0.036414	10.286	100	1000

SWITCH AND SOCKET-F02 Series Silver Gray

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000382200	F021631A-Switch-3G1W-16A-GY-GP	F021631A	16AX 250V~	Silver Gray	86	88	40	0.0950	195	160	100	0.00312	0.1127	510	340	210	0.036414	11.266	100	1000
	600000382300	F021632A-Switch-3G2W-16A-GY-GP	F021632A	16AX 250V~	Silver Gray	86	88	40	0.1004	195	160	100	0.00312	0.1181	510	340	210	0.036414	11.813	100	1000
	600000382400	F021641A-Switch-4G1W-16A-GY-GP	F021641A	16AX 250V~	Silver Gray	86	88	40	0.1018	195	160	100	0.00312	0.1195	510	340	210	0.036414	11.952	100	1000
	600000382500	F021642A-Switch-4G2W-16A-GY-GP	F021642A	16AX 250V~	Silver Gray	86	88	40	0.1096	195	160	100	0.00312	0.1273	510	340	210	0.036414	12.730	100	1000
	600002010900	F021041AX-Switch-4G1W-10A-GY-GP	F021041AX	10AX 250V~	Silver Gray	146	88	36	0.1627	195	186	98	0.00355	0.1875	510	395	215	0.043312	11.250	60	1000
	600002009500	F021061AX-Switch-6G1W-10A-GY-GP	F021061AX	10AX 250V~	Silver Gray	146	88	36	0.2228	195	186	98	0.00355	0.2478	510	395	215	0.043312	14.868	60	1000
	600000511000	F021025A-Window Curtain Switch-10A-GY-GP	F021025A	10A 250V~	Silver Gray	86	88	44	0.0957	195	186	98	0.00355	0.1139	510	395	215	0.043312	11.390	100	1000
	600000382600	F028401A-Switch-Doorbell-16A-GY-GP	F028401A	16A 250V~	Silver Gray	86	88	40	0.0681	195	160	100	0.00312	0.0858	510	340	210	0.036414	8.577	100	1000
	600000382700	F022013A-Switch-Neon-2 Pole-20A-GY-GP	F022013A	20A 250V~	Silver Gray	86	88	25	0.0822	195	160	100	0.00312	0.0999	510	340	210	0.036414	9.985	100	1000
	600000382800	F024513A-Switch-Neon-2 Pole-45A-GY-GP	F024513A	45A 250V~	Silver Gray	86	88	30	0.1192	195	160	100	0.00312	0.1369	510	340	210	0.036414	13.689	100	1000
	600002010000	F024513AX-Switch-Neon-DP-45A-GY-GP	F024513AX	45A 250V~	Silver Gray	146	88	33	0.2030	195	186	98	0.00355	0.2278	510	395	215	0.043312	13.668	60	1000
	600002011000	F024574AX-Switch-Neon-DP-45A-BS-13A-GYGP	F024574AX	45A 250V~ 13A 250V~	Silver Gray	146	88	33	0.2359	195	186	98	0.00355	0.2607	510	395	215	0.043312	15.642	60	1000
	600000382900	F021371A-Switched SKT-Neon-BS-13A-GY-GP	F021371A	13A 250V~	Silver Gray	86	88	30	0.0824	195	160	100	0.00312	0.1001	510	340	210	0.036414	10.009	100	1000
	600000383000	F021374A-Switched SKT-Neon-BS-13A-GY-GP	F021374A	13A 250V~	Silver Gray	86	88	30	0.0835	195	160	100	0.00312	0.1012	510	340	210	0.036414	10.122	100	1000
	600000384700	F0213785-Socket-20W-PD-2USB-BS-13A-GY-GP	F0213785	13A 250V~ 20W	Silver Gray	86	88	41	0.1120	195	160	100	0.00312	0.1342	510	340	210	0.036414	10.739	80	1000
	600000384400	F021375A-Switched SKT-Neon-BS-2*13A-GYGP	F021375A	13A 250V~	Silver Gray	146	88	32	0.1560	195	160	100	0.00312	0.1772	510	340	210	0.036414	10.634	60	1000
	600002009600	F0213785X-SKT-20WPD-2USB-DP-BS2*13A-GYGP	F0213785X	13A 250V~ 5V 2.1A	Silver Gray	146	88	39	0.2141	195	186	98	0.00355	0.2390	510	395	215	0.043312	14.340	60	1000
	600000383100	F021572A-Switched SKT-Neon-R-3P15A-GY-GP	F021572A	15A 250V~	Silver Gray	86	88	35	0.0813	195	160	100	0.00312	0.0990	510	340	210	0.036414	9.901	100	1000
	600000383200	F021691A-Switched SKT-Neon-GL-3P16A-GY-GP	F021691A	16A 250V~	Silver Gray	86	88	35	0.0762	195	160	100	0.00312	0.0939	510	340	210	0.036414	9.390	100	1000
	600000383300	F021681A-Switched SKT-GL-5P-16A-GY-GP	F021681A	16A 250V~	Silver Gray	86	88	35	0.0840	195	160	100	0.00312	0.1016	510	340	210	0.036414	10.164	100	1000
	600000383400	F021685-Switched SKT-USB-GL-5P-16A-GY-GP	F021685	16A 250V~ 2.4A 5V	Silver Gray	86	88	39	0.1039	195	160	100	0.00312	0.1251	510	340	210	0.036414	10.012	80	1000
	600000581201	F02167G-Switch-Schuko-16A-GY-GP-DZ	F02167G	16A 250V~	Silver Gray	86	88	39	0.0754	195	160	100	0.00312	0.0966	510	340	210	0.036414	7.730	80	1000
	600000511500	F02457C-Cable Outlet-45A Terminal-GY-GP	F02457C	45A 250V~	Silver Gray	86	88	45	0.1036	195	186	98	0.00355	0.1224	510	395	215	0.043312	9.792	80	1000
	600000383500	F026201-Telephone Outlet-GY-GP	F026201	4 lines	Silver Gray	86	88	35	0.0544	195	160	100	0.00312	0.0721	510	340	210	0.036414	7.213	100	1000
	600000383600	F026401-Computer Outlet-GY-GP	F026401	CAT6(6P6C)	Silver Gray	86	88	35	0.0548	195	160	100	0.00312	0.0725	510	340	210	0.036414	7.250	100	1000
	600000383700	F026101-TV Outlet-GY-GP	F026101	5-850MHZ	Silver Gray	86	88	29	0.0582	195	160	100	0.00312	0.0759	510	340	210	0.036414	7.586	100	1000
	600000383800	F026502-Tel+Computer Outlet-GY-GP	F026502	4 lines CAT6(6P6C)	Silver Gray	86	88	35	0.0580	195	160	100	0.00312	0.0757	510	340	210	0.036414	7.569	100	1000
	600000383900	F026501-TV+compter Outlet-GY-GP	F026501	5-850MHZ CAT6(6P6C)	Silver Gray	86	88	35	0.0630	195	160	100	0.00312	0.0806	510	340	210	0.036414	8.064	100	1000
	600000384000	F026402-Computer Outlet-2G-GY-GP	F026402	CAT6(6P6C)	Silver Gray	86	88	35	0.0584	195	160	100	0.00312	0.0761	510	340	210	0.036414	7.607	100	1000
	600000384100	F025401-Blank-GY-GP	F025401	/	Silver Gray	86	88	14	0.0376	195	160	100	0.00312	0.0482	510	340	210	0.036414	9.647	200	1000
	600002011500	F025401X-Blank-GY-GP	F025401X	/	Silver Gray	146	88	12	0.1040	195	186	98	0.00355	0.1150	510	395	215	0.043312	18.400	160	1000
	600000384200	F028101-Dimmer Switch-630W-GY-GP	F028101	630W 250V~	Silver Gray	86	88	43	0.0910	195	160	100	0.00312	0.1122	510	340	210	0.036414	8.979	80	1000
	600000385300	F028201-Fan Control-300W-GY-GP	F028201	300W 250V~	Silver Gray	86	88	43	0.0917	195	160	100	0.00312	0.1129	510	340	210	0.036414	9.031	80	1000
	600000384300	F023067-Key Card Switch-20A-GY-GP	F023067	20A 250V~	Silver Gray	86	88	44	0.1207	195	160	100	0.00312	0.1419	510	340	210	0.036414	11.352	80	1000
	600000403500	F026503-SATV+Computer Outlet-GY-GP	F026503	950-2150MHZ CAT6(6P6C)	Silver Gray	86	88	40	0.0622	195	160	100	0.00312	0.0799	510	340	210	0.036414	7.989	100	1000
	600000403800	F026102-Satellite TV Outlet-GY-GP	F026102	950-2150MHZ	Silver Gray	86	88	35	0.0481	195	160	100	0.00312	0.0658	510	340	210	0.036414	6.579	100	1000

SWITCH AND SOCKET-F02 Series Black

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000425700	F021611A-Switch-1G1W-16A-BK-GP-DZ	F021611A	16AX 250V~	Black	86	88	40	0.0671	195	160	100	0.00312	0.0848	510	340	210	0.036414	8.479	100	1000
	600000425800	F021612A-Switch-1G2W-16A-BK-GP-DZ	F021612A	16AX 250V~	Black	86	88	40	0.0696	195	160	100	0.00312	0.0873	510	340	210	0.036414	8.732	100	1000
	600000511900	F021014A-Switch-1G4W-10A-BK-GP-DZ	F021014A	10AX 250V~	Black	86	88	36	0.1169	195	186	98	0.00355	0.1363	510	395	215	0.043312	13.630	100	1000
	600000425900	F021621A-Switch-2G1W-16A-BK-GP-DZ	F021621A	16AX 250V~	Black	86	88	40	0.0819	195	160	100	0.00312	0.0996	510	340	210	0.036414	9.960	100	1000
	600000426000	F021622A-Switch-2G2W-16A-BK-GP-DZ	F021622A	16AX 250V~	Black	86	88	40	0.0852	195	160	100	0.00312	0.1029	510	340	210	0.036414	10.286	100	1000
	600000426100	F021631A-Switch-3G1W-16A-BK-GP-DZ	F021631A	16AX 250V~	Black	86	88	40	0.0950	195	160	100	0.00312	0.1127	510	340	210	0.036414	11.266	100	1000
	600000426200	F021632A-Switch-3G2W-16A-BK-GP-DZ	F021632A	16AX 250V~	Black	86	88	40	0.1004	195	160	100	0.00312	0.1181	510	340	210	0.036414	11.813	100	1000
	600000426300	F021641A-Switch-4G1W-16A-BK-GP-DZ	F021641A	16AX 250V~	Black	86	88	40	0.1018	195	160	100	0.00312	0.1195	510	340	210	0.036414	11.952	100	1000
	600000426400	F021642A-Switch-4G2W-16A-BK-GP-DZ	F021642A	16AX 250V~	Black	86	88	40	0.1096	195	160	100	0.00312	0.1273	510	340	210	0.036414	12.730	100	1000
	600002011100	F021041AX-Switch-4G1W-10A-BK-GP-DZ	F021041AX	10AX 250V~	Black	146	88	33	0.1627	195	186	98	0.00355	0.1875	510	395	215	0.043312	11.250	60	1000
	600002009700	F021061AX-Switch-6G1W-10A-BK-GP-DZ	F021061AX	10AX 250V~	Black	146	88	36	0.2228	195	186	98	0.00355	0.2478	510	395	215	0.043312	14.868	60	1000
	600000511100	F021025A-Window Curtain SW-10A-BK-GP-DZ	F021025A	10A 250V~	Black	86	88	44	0.0957	195	186	98	0.00355	0.1139	510	395	215	0.043312	11.390	100	1000
	600000426500	F028401A-Switch-Doorbell-16A-BK-GP-DZ	F028401A	16A 250V~	Black	86	88	40	0.0681	195	160	100	0.00312	0.0858	510	340	210	0.036414	8.577	100	1000
	600000426600	F022013A-Switch-Neon-2 Pole-20A-BK-GP-DZ	F022013A	20A 250V~	Black	86	88	25	0.0822	195	160	100	0.00312	0.0999	510	340	210	0.036414	9.985	100	1000
	600000426700	F024513A-Switch-Neon-2 Pole-45A-BK-GP-DZ	F024513A	45A 250V~	Black	86	88	30	0.1192	195	160	100	0.00312	0.1369	510	340	210	0.036414	13.689	100	1000
	600002011300	F024513AX-Switch-Neon-DP-45A-BK-GP-DZ	F024513AX	45A 250V~	Black	146	88	33	0.2030	195	186	98	0.00355	0.2278	510	395	215	0.043312	13.668	60	1000
	600002011200	F024574AX-Switch-Neon-DP45A-BS13A-BKGPDZ	F024574AX	45A 250V~ 13A 250V~	Black	146	88	33	0.2359	195	186	98	0.00355	0.2607	510	395	215	0.043312	15.642	60	1000
	600000518200	F021371A-Switched SKT-Neon-BS13A-BK-GPDZ	F021371A	13A 250V~	Black	86	88	30	0.0824	195	160	100	0.00312	0.1001	510	340	210	0.036414	10.009	100	1000
	600000426800	F021374A-Switched SKT-Neon-BS-13A-BK-DZ	F021374A	13A 250V~	Black	86	88	30	0.0835	195	160	100	0.00312	0.1012	510	340	210	0.036414	10.122	100	1000
	600000426900	F0213785-Socket-20W-PD-2USB-BS-13A-BK-DZ	F0213785	13A 250V~ 20W	Black	86	88	41	0.1120	195	160	100	0.00312	0.1342	510	340	210	0.036414	10.739	80	1000
	600000427000	F021375A-Switched SKT-Neon-BS-2*13A-BKDZ	F021375A	13A 250V~	Black	146	88	32	0.1560	195	160	100	0.00312	0.1772	510	340	210	0.036414	10.634	60	1000
	600002009800	F0213785X-SKT-20WPD2USB-DPBS2*13A-BKGPDZ	F0213785X	13A 250V~ 5V 2.1A	Black	146	88	39	0.2141	195	186	98	0.00355	0.2390	510	395	215	0.043312	14.340	60	1000
	600000518300	F021572A-SW SKT-Neon-R-3P15A-BK-GP-DZ	F021572A	15A 250V~	Black	86	88	35	0.0813	195	160	100	0.00312	0.0990	510	340	210	0.036414	9.901	100	1000
	600000518400	F021691A-SW SKT-Neon-GL-3P16A-BK-GP-DZ	F021691A	16A 250V~	Black	86	88	35	0.0762	195	160	100	0.00312	0.0939	510	340	210	0.036414	9.390	100	1000
	600000518500	F021681A-Switched SKT-GL-5P-16A-BK-GP-DZ	F021681A	16A 250V~	Black	86	88	35	0.0840	195	160	100	0.00312	0.1016	510	340	210	0.036414	10.164	100	1000
	600000518600	F021685-SW SKT-USB-GL-5P-16A-BK-GP-DZ	F021685	16A 250V~ 2.4A 5V	Black	86	88	39	0.1039	195	160	100	0.00312	0.1251	510	340	210	0.036414	10.012	80	1000
	600000581301	F02167G-Switch-Schuko-16A-BK-GP-DZ	F02167G	16A 250V~	Black	86	88	39	0.0754	195	160	100	0.00312	0.0966	510	340	210	0.036414	7.730	80	1000
	600000511800	F02457C-Cable Outlet-45A Terminal-BKGPDZ	F02457C	45A 250V~	Black	86	88	45	0.1036	195	186	98	0.00355	0.1224	510	395	215	0.043312	9.792	80	1000
	600000427100	F026201-Telephone Outlet-BK-GP-DZ	F026201	4 lines	Black	86	88	35	0.0544	195	160	100	0.00312	0.0721	510	340	210	0.036414	7.213	100	1000
	600000427200	F026401-Computer Outlet-BK-GP-DZ	F026401	CAT6(6P6C)	Black	86	88	35	0.0548	195	160	100	0.00312	0.0725	510	340	210	0.036414	7.250	100	1000
	600000427300	F026101-TV Outlet-BK-GP-DZ	F026101	5-850MHZ	Black	86	88	29	0.0582	195	160	100	0.00312	0.0759	510	340	210	0.036414	7.586	100	1000
	600000427400	F026502-Tel+Computer Outlet-BK-GP-DZ	F026502	4 lines CAT6(6P6C)	Black	86	88	35	0.0580	195	160	100	0.00312	0.0757	510	340	210	0.036414	7.569	100	1000
	600000427500	F026501-TV+compter Outlet-BK-GP-DZ	F026501	5-850MHZ CAT6(6P6C)	Black	86	88	35	0.0630	195	160	100	0.00312	0.0806	510	340	210	0.036414	8.064	100	1000
	600000427600	F026402-Computer Outlet-2G-BK-GP-DZ	F026402	CAT6(6P6C)	Black	86	88	35	0.0584	195	160	100	0.00312	0.0761	510	340	210	0.036414	7.607	100	1000
	600000427700	F025401-Blank-BK-GP-DZ	F025401	/	Black	86	88	14	0.0376	195	160	100	0.00312	0.0482	510	340	210	0.036414	9.647	200	1000
	600002011600	F025401X-Blank-BK-GP-DZ	F025401X	/	Black	146	88	12	0.1040	195	186	98	0.00355	0.1150	510	395	215	0.043312	18.400	160	1000
	600000427800	F028101-Dimmer Switch-630W-BK-GP-DZ	F028101	630W 250V~	Black	86	88	43	0.0910	195	160	100	0.00312	0.1122	510	340	210	0.036414	8.979	80	1000
	600000427900	F028201-Fan Control-300W-BK-GP-DZ	F028201	300W 250V~	Black	86	88	43	0.0917	195	160	100	0.00312	0.1129	510	340	210	0.036414	9.031	80	1000
	600000428000	F023067-Key Card Switch-20A-BK-GP-DZ	F023067	20A 250V~	Black	86	88	44	0.1207	195	160	100	0.00312	0.1419	510	340	210	0.036414	11.352	80	1000
	600000428100	F026503-SATV+Computer Outlet-BK-GP-DZ	F026503	950-2150MHZ CAT6(6P6C)	Black	86	88	40	0.0622	195	160	100	0.00312	0.0799	510	340	210	0.036414	7.989	100	1000
	600000428200	F026102-Satellite TV Outlet-BK-GP-DZ	F026102	950-2150MHZ	Black	86	88	35	0.0481	195	160	100	0.00312	0.0658	510	340	210	0.036414	6.579	100	1000

SWITCH AND SOCKET-Thinplus Series White

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000560900	KG-T02P1611A-Switch-1G1W-16A-WH	KG-T02P1611A	16AX 250V~	White	86	86	32	0.080	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000561000	KG-T02P1612A-Switch-1G2W-16A-WH	KG-T02P1612A	16AX 250V~	White	86	86	32	0.105	190	95	185	0.003339	0.122	495	395	205	0.040083	12.200	100	500
	600000561100	KG-T02P1614A-Switch-1G4W-16A-WH	KG-T02P1614A	16AX 250V~	White	86	86	32	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000561200	KG-T02P1621A-Switch-2G1W-16A-WH	KG-T02P1621A	16AX 250V~	White	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000561300	KG-T02P1622A-Switch-2G2W-16A-WH	KG-T02P1622A	16AX 250V~	White	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000561400	KG-T02P1631A-Switch-3G1W-16A-WH	KG-T02P1631A	16AX 250V~	White	86	86	32	0.110	190	95	185	0.003339	0.135	495	395	205	0.040083	13.500	100	500
	600000561500	KG-T02P1632A-Switch-3G2W-16A-WH	KG-T02P1632A	16AX 250V~	White	86	86	32	0.125	190	95	185	0.003339	0.146	495	395	205	0.040083	14.600	100	500
	600000561600	KG-T02P1641A-Switch-4G1W-16A-WH	KG-T02P1641A	16AX 250V~	White	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000561700	KG-T02P1642A-Switch-4G2W-16A-WH	KG-T02P1642A	16AX 250V~	White	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014006900	KG-T02P1642AX-Switch-4G2W-16A-146-WH	KG-T02P1642AX	16AX 250V~	White	146	86	32	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014007000	KG-T02P1662AX-Switch-6G2W-16A-146-WH	KG-T02P1662AX	16AX 250V~	White	146	86	32	0.250	178	135	151	0.003629	0.251	370	316	284	0.033205	16.064	64	500
	600000561800	KG-T02P1616A-Switch-Doorbell-16A-WH	KG-T02P1616A	16AX 250V~	White	86	86	32	0.100	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000561900	KG-T02P1625A-Window Curtain SW-16A-WH	KG-T02P1625A	16AX 250V~	White	86	86	32	0.105	190	95	185	0.003339	0.127	495	395	205	0.040083	12.700	100	500
	600000562000	KG-T02P2013A-SW-Neon-DP-20A-WH	KG-T02P2013A	20A 250V~	White	86	86	33	0.120	190	95	185	0.003339	0.140	495	395	205	0.040083	14.000	100	500
	600000562100	KG-T02P4513A-SW-Neon-DP-45A-WH	KG-T02P4513A	45A 250V~	White	86	86	30	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014007100	KG-T02P4513AX-SW-Neon-DP-45A-146-WH	KG-T02P4513AX	45A 250V~	White	146	86	30	0.027	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600000562200	KG-T02P13713GAX-SW-DP-45A+BS13A-146-WH	KG-T02P13713GAX	45A 250V~ 13A 250V~	White	146	86	30	0.210	178	135	151	0.003629	0.238	370	316	284	0.033205	15.232	64	500
	600000562300	KG-T02P13713GA-SW SKT-DP-BS-13A-WH	KG-T02P13713GA	13A 250V~	White	86	86	28	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000562800	KG-T02P8513GA-SKT-20W 2USB-DP- BS13A-WH	KG-T02P8513GA	13A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	White	86	86	37	0.130	190	95	185	0.003339	0.149	495	395	205	0.040083	14.900	100	500
	600014007200	KG-T02P13723GAX-SW SKT-DP-BS2*13A-146-WH	KG-T02P13723GAX	13A 250V~	White	146	86	28	0.160	178	135	151	0.003629	0.191	370	316	284	0.033205	12.224	64	500
	600014007300	KG-T02P8523GAX-SKT-20W2USB-DP-BS2*13A-WH	KG-T02P8523GAX	13A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	White	146	86	37	0.139	178	135	151	0.003629	0.169	370	316	284	0.033205	10.816	64	500
	600000562400	KG-T02P15711DA-SW SKT-R-3P15A-WH	KG-T02P15711DA	15A 250V~	White	86	86	35	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000562500	KG-T02P1691106A-SW SKT-GL-3P16A-WH	KG-T02P1691106A	16A 250V~	White	86	86	33	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000562700	KG-T02P851106A-SKT-20W 2USB-GL-3P16A-WH	KG-T02P851106A	16A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	White	86	86	37	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000562600	KG-T02P1691108A-SW SKT-GL-5P-16A-WH	KG-T02P1691108A	16A 250V~	White	86	86	33	0.103	190	95	185	0.003339	0.124	495	395	205	0.040083	12.400	100	500
	600014007400	KG-T02P1692106AX-SKT-GL3P*2*16A-146-WH	KG-T02P1692106AX	16A 250V~	White	146	86	33	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014007500	KG-T02P852106AX-SKT-20W2USB-GL3P*216A-WH	KG-T02P852106AX	16A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	White	146	86	37	0.280	178	135	151	0.003629	0.300	370	316	284	0.033205	19.200	64	500
	600000563000	KG-T02P20O-Cable Outlet-20A Terminal-WH	KG-T02P20O	20A 250V~	White	86	86	39	0.100	190	95	185	0.003339	0.122	495	395	205	0.040083	9.760	80	500
	600000562900	KG-T02P45O-Cable Outlet-45A Terminal-WH	KG-T02P45O	45A 250V~	White	86	86	47	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000563900	KG-T02P8101-LED Dimmer Switch-100W-WH	KG-T02P8101	100W 220V-240V~	White	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000564000	KG-T02P8201-Fan Control-300W-WH	KG-T02P8201	300W 220V-240V~	White	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000564100	KG-T02P6703-Key Card Switch-16A-WH	KG-T02P6703	16A 220V-240V~	White	86	86	43	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000563100	KG-T02P6101-TV Outlet-WH	KG-T02P6101	5-1000MHz	White	86	86	29	0.070	190	95	185	0.003339	0.096	495	395	205	0.040083	9.600	100	500
	600000563200	KG-T02P6201-Telephone Outlet-WH	KG-T02P6201	RJ11	White	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000563300	KG-T02P6401-Computer Outlet-WH	KG-T02P6401	RJ45 CAT6	White	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000563500	KG-T02P6402-Computer Outlet-2G-WH	KG-T02P6402	RJ45 CAT6	White	86	86	33	0.080	190	95	185	0.003339	0.100	495	395	205	0.040083	10.000	100	500
	600000563400	KG-T02P6503-Tel+Computer Outlet-WH	KG-T02P6503	RJ11/RJ45 CAT6	White	86	86	33	0.075	190	95	185	0.003339	0.098	495	395	205	0.040083	9.800	100	500
	600000563600	KG-T02P6102-Satellite TV Outlet-WH	KG-T02P6102	950-2150MHZ	White	86	86	38	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000563700	KG-T02P6501SATV+Computer Outlet-WH	KG-T02P6501	950-2150MHZ/RJ45 CAT6	White	86	86	43	0.087	190	95	185	0.003339	0.115	495	395	205	0.040083	9.200	80	500
	600000563800	KG-T02P5401-Blank-WH	KG-T02P5401	86*86	White	86	86	11	0.055	190	95	185	0.003339	0.061	495	395	205	0.040083	12.200	200	500
	600014007600	KG-T02P5401X-Blank-146-WH	KG-T02P5401X	86*146	White	146	86	11	0.070	178	135	151	0.003629	0.085	370	316	284	0.033205	13.600	160	500

SWITCH AND SOCKET-Thinplus Series Gold

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000564200	KG-T02P1611A-Switch-1G1W-16A-GD	KG-T02P1611A	16AX 250V~	Gold	86	86	32	0.080	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000564300	KG-T02P1612A-Switch-1G2W-16A-GD	KG-T02P1612A	16AX 250V~	Gold	86	86	32	0.105	190	95	185	0.003339	0.122	495	395	205	0.040083	12.200	100	500
	600000564400	KG-T02P1614A-Switch-1G4W-16A-GD	KG-T02P1614A	16AX 250V~	Gold	86	86	32	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000564500	KG-T02P1621A-Switch-2G1W-16A-GD	KG-T02P1621A	16AX 250V~	Gold	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000564600	KG-T02P1622A-Switch-2G2W-16A-GD	KG-T02P1622A	16AX 250V~	Gold	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000564700	KG-T02P1631A-Switch-3G1W-16A-GD	KG-T02P1631A	16AX 250V~	Gold	86	86	32	0.110	190	95	185	0.003339	0.135	495	395	205	0.040083	13.500	100	500
	600000564800	KG-T02P1632A-Switch-3G2W-16A-GD	KG-T02P1632A	16AX 250V~	Gold	86	86	32	0.125	190	95	185	0.003339	0.146	495	395	205	0.040083	14.600	100	500
	600000564900	KG-T02P1641A-Switch-4G1W-16A-GD	KG-T02P1641A	16AX 250V~	Gold	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000565000	KG-T02P1642A-Switch-4G2W-16A-GD	KG-T02P1642A	16AX 250V~	Gold	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014007700	KG-T02P1642AX-Switch-4G2W-16A-146-GD	KG-T02P1642AX	16AX 250V~	Gold	146	86	32	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014007800	KG-T02P1662AX-Switch-6G2W-16A-146-GD	KG-T02P1662AX	16AX 250V~	Gold	146	86	32	0.250	178	135	151	0.003629	0.251	370	316	284	0.033205	16.064	64	500
	600000565100	KG-T02P1616A-Switch-Doorbell-16A-GD	KG-T02P1616A	16AX 250V~	Gold	86	86	32	0.100	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000565200	KG-T02P1625A-Window Curtain SW-16A-GD	KG-T02P1625A	16AX 250V~	Gold	86	86	32	0.105	190	95	185	0.003339	0.127	495	395	205	0.040083	12.700	100	500
	600000565300	KG-T02P2013A-SW-Neon-DP-20A-GD	KG-T02P2013A	20A 250V~	Gold	86	86	33	0.120	190	95	185	0.003339	0.140	495	395	205	0.040083	14.000	100	500
	600000565400	KG-T02P4513A-SW-Neon-DP-45A-GD	KG-T02P4513A	45A 250V~	Gold	86	86	30	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014007900	KG-T02P4513AX-SW-Neon-DP-45A-146-GD	KG-T02P4513AX	45A 250V~	Gold	146	86	30	0.027	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600000565500	KG-T02P13713GAX-SW-DP-45A+BS13A-146-GD	KG-T02P13713GAX	45A 250V~ 13A 250V~	Gold	146	86	30	0.210	178	135	151	0.003629	0.238	370	316	284	0.033205	15.232	64	500
	600000565600	KG-T02P13713GA-SW SKT-DP-BS-13A-GD	KG-T02P13713GA	13A 250V~	Gold	86	86	28	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000566100	KG-T02P8513GA-SKT-20W 2USB-DP- BS13A-GD	KG-T02P8513GA	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gold	86	86	37	0.130	190	95	185	0.003339	0.149	495	395	205	0.040083	14.900	100	500
	600014008000	KG-T02P13723GAX-SW SKT-DP-BS2*13A-146-GD	KG-T02P13723GAX	13A 250V~	Gold	146	86	28	0.160	178	135	151	0.003629	0.191	370	316	284	0.033205	12.224	64	500
	600014008100	KG-T02P8523GAX-SKT-20W2USB-DP-BS2*13A-GD	KG-T02P8523GAX	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gold	146	86	37	0.139	178	135	151	0.003629	0.169	370	316	284	0.033205	10.816	64	500
	600000565700	KG-T02P15711DA-SW SKT-R-3P15A-GD	KG-T02P15711DA	15A 250V~	Gold	86	86	35	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000565800	KG-T02P1691106A-SW SKT-GL-3P16A-GD	KG-T02P1691106A	16A 250V~	Gold	86	86	33	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000566000	KG-T02P851106A-SKT-20W 2USB-GL-3P16A-GD	KG-T02P851106A	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gold	86	86	37	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000565900	KG-T02P1691108A-SW SKT-GL-5P-16A-GD	KG-T02P1691108A	16A 250V~	Gold	86	86	33	0.103	190	95	185	0.003339	0.124	495	395	205	0.040083	12.400	100	500
	600014008200	KG-T02P1692106AX-SKT-GL3P*2*16A-146-GD	KG-T02P1692106AX	16A 250V~	Gold	146	86	33	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014008300	KG-T02P852106AX-SKT-20W2USB-GL3P*216A-GD	KG-T02P852106AX	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gold	146	86	37	0.280	178	135	151	0.003629	0.300	370	316	284	0.033205	19.200	64	500
	600000566300	KG-T02P20O-Cable Outlet-20A Terminal-GD	KG-T02P20O	20A 250V~	Gold	86	86	39	0.100	190	95	185	0.003339	0.122	495	395	205	0.040083	9.760	80	500
	600000566200	KG-T02P45O-Cable Outlet-45A Terminal-GD	KG-T02P45O	45A 250V~	Gold	86	86	47	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000567200	KG-T02P8101-LED Dimmer Switch-100W-GD	KG-T02P8101	100W 220V-240V~	Gold	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000567300	KG-T02P8201-Fan Control-300W-GD	KG-T02P8201	300W 220V-240V~	Gold	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000567400	KG-T02P6703-Key Card Switch-16A-GD	KG-T02P6703	16A 220V-240V~	Gold	86	86	43	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000566400	KG-T02P6101-TV Outlet-GD	KG-T02P6101	5-1000MHz	Gold	86	86	29	0.070	190	95	185	0.003339	0.096	495	395	205	0.040083	9.600	100	500
	600000566500	KG-T02P6201-Telephone Outlet-GD	KG-T02P6201	RJ11	Gold	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000566600	KG-T02P6401-Computer Outlet-GD	KG-T02P6401	RJ45 CAT6	Gold	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000566800	KG-T02P6402-Computer Outlet-2G-GD	KG-T02P6402	RJ45 CAT6	Gold	86	86	33	0.080	190	95	185	0.003339	0.100	495	395	205	0.040083	10.000	100	500
	600000566700	KG-T02P6503-Tel+Computer Outlet-GD	KG-T02P6503	RJ11/RJ45 CAT6	Gold	86	86	33	0.075	190	95	185	0.003339	0.098	495	395	205	0.040083	9.800	100	500
	600000566900	KG-T02P6102-Satellite TV Outlet-GD	KG-T02P6102	950-2150MHZ	Gold	86	86	38	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000567000	KG-T02P6501SATV+Computer Outlet-GD	KG-T02P6501	950-2150MHZ/RJ45 CAT6	Gold	86	86	43	0.087	190	95	185	0.003339	0.115	495	395	205	0.040083	9.200	80	500
	600000567100	KG-T02P5401-Blank-GD	KG-T02P5401	86*86	Gold	86	86	11	0.055	190	95	185	0.003339	0.061	495	395	205	0.040083	12.200	200	500
	600014008400	KG-T02P5401X-Blank-146-GD	KG-T02P5401X	86*146	Gold	146	86	11	0.070	178	135	151	0.003629	0.085	370	316	284	0.033205	13.600	160	500

SWITCH AND SOCKET-Thinplus Series Gray

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000567500	KG-T02P1611A-Switch-1G1W-16A-GY	KG-T02P1611A	16AX 250V~	Gray	86	86	32	0.080	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000567600	KG-T02P1612A-Switch-1G2W-16A-GY	KG-T02P1612A	16AX 250V~	Gray	86	86	32	0.105	190	95	185	0.003339	0.122	495	395	205	0.040083	12.200	100	500
	600000567700	KG-T02P1614A-Switch-1G4W-16A-GY	KG-T02P1614A	16AX 250V~	Gray	86	86	32	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000567800	KG-T02P1621A-Switch-2G1W-16A-GY	KG-T02P1621A	16AX 250V~	Gray	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000567900	KG-T02P1622A-Switch-2G2W-16A-GY	KG-T02P1622A	16AX 250V~	Gray	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000568000	KG-T02P1631A-Switch-3G1W-16A-GY	KG-T02P1631A	16AX 250V~	Gray	86	86	32	0.110	190	95	185	0.003339	0.135	495	395	205	0.040083	13.500	100	500
	600000568100	KG-T02P1632A-Switch-3G2W-16A-GY	KG-T02P1632A	16AX 250V~	Gray	86	86	32	0.125	190	95	185	0.003339	0.146	495	395	205	0.040083	14.600	100	500
	600000568200	KG-T02P1641A-Switch-4G1W-16A-GY	KG-T02P1641A	16AX 250V~	Gray	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000568300	KG-T02P1642A-Switch-4G2W-16A-GY	KG-T02P1642A	16AX 250V~	Gray	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014008500	KG-T02P1642AX-Switch-4G2W-16A-146-GY	KG-T02P1642AX	16AX 250V~	Gray	146	86	32	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014008600	KG-T02P1662AX-Switch-6G2W-16A-146-GY	KG-T02P1662AX	16AX 250V~	Gray	146	86	32	0.250	178	135	151	0.003629	0.251	370	316	284	0.033205	16.064	64	500
	600000568400	KG-T02P1616A-Switch-Doorbell-16A-GY	KG-T02P1616A	16AX 250V~	Gray	86	86	32	0.100	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000568500	KG-T02P1625A-Window Curtain SW-16A-GY	KG-T02P1625A	16AX 250V~	Gray	86	86	32	0.105	190	95	185	0.003339	0.127	495	395	205	0.040083	12.700	100	500
	600000568600	KG-T02P2013A-SW-Neon-DP-20A-GY	KG-T02P2013A	20A 250V~	Gray	86	86	33	0.120	190	95	185	0.003339	0.140	495	395	205	0.040083	14.000	100	500
	600000568700	KG-T02P4513A-SW-Neon-DP-45A-GY	KG-T02P4513A	45A 250V~	Gray	86	86	30	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014008700	KG-T02P4513AX-SW-Neon-DP-45A-146-GY	KG-T02P4513AX	45A 250V~	Gray	146	86	30	0.027	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600000568800	KG-T02P13713GAX-SW-DP-45A+BS13A-146-GY	KG-T02P13713GAX	45A 250V~ 13A 250V~	Gray	146	86	30	0.210	178	135	151	0.003629	0.238	370	316	284	0.033205	15.232	64	500
	600000568900	KG-T02P13713GA-SW SKT-DP-BS-13A-GY	KG-T02P13713GA	13A 250V~	Gray	86	86	28	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000569400	KG-T02P8513GA-SKT-20W 2USB-DP- BS13A-GY	KG-T02P8513GA	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gray	86	86	37	0.130	190	95	185	0.003339	0.149	495	395	205	0.040083	14.900	100	500
	600014008800	KG-T02P13723GAX-SW SKT-DP-BS2*13A-146-GY	KG-T02P13723GAX	13A 250V~	Gray	146	86	28	0.160	178	135	151	0.003629	0.191	370	316	284	0.033205	12.224	64	500
	600014008900	KG-T02P8523GAX-SKT-20W2USB-DP-BS2*13A-GY	KG-T02P8523GAX	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gray	146	86	37	0.139	178	135	151	0.003629	0.169	370	316	284	0.033205	10.816	64	500
	600000569000	KG-T02P15711DA-SW SKT-R-3P15A-GY	KG-T02P15711DA	15A 250V~	Gray	86	86	35	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000569100	KG-T02P1691106A-SW SKT-GL-3P16A-GY	KG-T02P1691106A	16A 250V~	Gray	86	86	33	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000569300	KG-T02P851106A-SKT-20W 2USB-GL-3P16A-GY	KG-T02P851106A	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gray	86	86	37	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000569200	KG-T02P1691108A-SW SKT-GL-5P-16A-GY	KG-T02P1691108A	16A 250V~	Gray	86	86	33	0.103	190	95	185	0.003339	0.124	495	395	205	0.040083	12.400	100	500
	600014009000	KG-T02P1692106AX-SKT-GL3P*2*16A-146-GY	KG-T02P1692106AX	16A 250V~	Gray	146	86	33	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014009100	KG-T02P852106AX-SKT-20W2USB-GL3P*216A-GY	KG-T02P852106AX	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Gray	146	86	37	0.280	178	135	151	0.003629	0.300	370	316	284	0.033205	19.200	64	500
	600000569600	KG-T02P20O-Cable Outlet-20A Terminal-GY	KG-T02P20O	20A 250V~	Gray	86	86	39	0.100	190	95	185	0.003339	0.122	495	395	205	0.040083	9.760	80	500
	600000569500	KG-T02P45O-Cable Outlet-45A Terminal-GY	KG-T02P45O	45A 250V~	Gray	86	86	47	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000570500	KG-T02P8101-LED Dimmer Switch-100W-GY	KG-T02P8101	100W 220V-240V~	Gray	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000570600	KG-T02P8201-Fan Control-300W-GY	KG-T02P8201	300W 220V-240V~	Gray	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000570700	KG-T02P6703-Key Card Switch-16A-GY	KG-T02P6703	16A 220V-240V~	Gray	86	86	43	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000569700	KG-T02P6101-TV Outlet-GY	KG-T02P6101	5-1000MHz	Gray	86	86	29	0.070	190	95	185	0.003339	0.096	495	395	205	0.040083	9.600	100	500
	600000569800	KG-T02P6201-Telephone Outlet-GY	KG-T02P6201	RJ11	Gray	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000569900	KG-T02P6401-Computer Outlet-GY	KG-T02P6401	RJ45 CAT6	Gray	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000570100	KG-T02P6402-Computer Outlet-2G-GY	KG-T02P6402	RJ45 CAT6	Gray	86	86	33	0.080	190	95	185	0.003339	0.100	495	395	205	0.040083	10.000	100	500
	600000570000	KG-T02P6503-Tel+Computer Outlet-GY	KG-T02P6503	RJ11/RJ45 CAT6	Gray	86	86	33	0.075	190	95	185	0.003339	0.098	495	395	205	0.040083	9.800	100	500
	600000570200	KG-T02P6102-Satellite TV Outlet-GY	KG-T02P6102	950-2150MHZ	Gray	86	86	38	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000570300	KG-T02P6501SATV+Computer Outlet-GY	KG-T02P6501	950-2150MHZ/RJ45 CAT6	Gray	86	86	43	0.087	190	95	185	0.003339	0.115	495	395	205	0.040083	9.200	80	500
	600000570400	KG-T02P5401-Blank-GY	KG-T02P5401	86*86	Gray	86	86	11	0.055	190	95	185	0.003339	0.061	495	395	205	0.040083	12.200	200	500
	600014009200	KG-T02P5401X-Blank-146-GY	KG-T02P5401X	86*146	Gray	146	86	11	0.070	178	135	151	0.003629	0.085	370	316	284	0.033205	13.600	160	500

SWITCH AND SOCKET-Thinplus Series Black

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000570800	KG-T02P1611A-Switch-1G1W-16A-BK	KG-T02P1611A	16AX 250V~	Black	86	86	32	0.080	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000570900	KG-T02P1612A-Switch-1G2W-16A-BK	KG-T02P1612A	16AX 250V~	Black	86	86	32	0.105	190	95	185	0.003339	0.122	495	395	205	0.040083	12.200	100	500
	600000571000	KG-T02P1614A-Switch-1G4W-16A-BK	KG-T02P1614A	16AX 250V~	Black	86	86	32	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000571100	KG-T02P1621A-Switch-2G1W-16A-BK	KG-T02P1621A	16AX 250V~	Black	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000571200	KG-T02P1622A-Switch-2G2W-16A-BK	KG-T02P1622A	16AX 250V~	Black	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000571300	KG-T02P1631A-Switch-3G1W-16A-BK	KG-T02P1631A	16AX 250V~	Black	86	86	32	0.110	190	95	185	0.003339	0.135	495	395	205	0.040083	13.500	100	500
	600000571400	KG-T02P1632A-Switch-3G2W-16A-BK	KG-T02P1632A	16AX 250V~	Black	86	86	32	0.125	190	95	185	0.003339	0.146	495	395	205	0.040083	14.600	100	500
	600000571500	KG-T02P1641A-Switch-4G1W-16A-BK	KG-T02P1641A	16AX 250V~	Black	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000571600	KG-T02P1642A-Switch-4G2W-16A-BK	KG-T02P1642A	16AX 250V~	Black	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014009300	KG-T02P1642AX-Switch-4G2W-16A-146-BK	KG-T02P1642AX	16AX 250V~	Black	146	86	32	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014009400	KG-T02P1662AX-Switch-6G2W-16A-146-BK	KG-T02P1662AX	16AX 250V~	Black	146	86	32	0.250	178	135	151	0.003629	0.251	370	316	284	0.033205	16.064	64	500
	600000571700	KG-T02P1616A-Switch-Doorbell-16A-BK	KG-T02P1616A	16AX 250V~	Black	86	86	32	0.100	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000571800	KG-T02P1625A-Window Curtain SW-16A-BK	KG-T02P1625A	16AX 250V~	Black	86	86	32	0.105	190	95	185	0.003339	0.127	495	395	205	0.040083	12.700	100	500
	600000571900	KG-T02P2013A-SW-Neon-DP-20A-BK	KG-T02P2013A	20A 250V~	Black	86	86	33	0.120	190	95	185	0.003339	0.140	495	395	205	0.040083	14.000	100	500
	600000572000	KG-T02P4513A-SW-Neon-DP-45A-BK	KG-T02P4513A	45A 250V~	Black	86	86	30	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014009500	KG-T02P4513AX-SW-Neon-DP-45A-146-BK	KG-T02P4513AX	45A 250V~	Black	146	86	30	0.027	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600000572100	KG-T02P13713GAX-SW-DP-45A+BS13A-146-BK	KG-T02P13713GAX	45A 250V~ 13A 250V~	Black	146	86	30	0.210	178	135	151	0.003629	0.238	370	316	284	0.033205	15.232	64	500
	600000572200	KG-T02P13713GA-SW SKT-DP-BS-13A-BK	KG-T02P13713GA	13A 250V~	Black	86	86	28	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000572700	KG-T02P8513GA-SKT-20W 2USB-DP- BS13A-BK	KG-T02P8513GA	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Black	86	86	37	0.130	190	95	185	0.003339	0.149	495	395	205	0.040083	14.900	100	500
	600014009600	KG-T02P13723GAX-SW SKT-DP-BS2*13A-146-BK	KG-T02P13723GAX	13A 250V~	Black	146	86	28	0.160	178	135	151	0.003629	0.191	370	316	284	0.033205	12.224	64	500
	600014009700	KG-T02P8523GAX-SKT-20W2USB-DP-BS2*13A-BK	KG-T02P8523GAX	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Black	146	86	37	0.139	178	135	151	0.003629	0.169	370	316	284	0.033205	10.816	64	500
	600000572300	KG-T02P15711DA-SW SKT-R-3P15A-BK	KG-T02P15711DA	15A 250V~	Black	86	86	35	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000572400	KG-T02P1691106A-SW SKT-GL-3P16A-BK	KG-T02P1691106A	16A 250V~	Black	86	86	33	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000572600	KG-T02P851106A-SKT-20W 2USB-GL-3P16A-BK	KG-T02P851106A	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Black	86	86	37	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000572500	KG-T02P1691108A-SW SKT-GL-5P-16A-BK	KG-T02P1691108A	16A 250V~	Black	86	86	33	0.103	190	95	185	0.003339	0.124	495	395	205	0.040083	12.400	100	500
	600014009800	KG-T02P1692106AX-SKT-GL3P*2*16A-146-BK	KG-T02P1692106AX	16A 250V~	Black	146	86	33	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014009900	KG-T02P852106AX-SKT-20W2USB-GL3P*216A-BK	KG-T02P852106AX	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Black	146	86	37	0.280	178	135	151	0.003629	0.300	370	316	284	0.033205	19.200	64	500
	600000572900	KG-T02P20O-Cable Outlet-20A Terminal-BK	KG-T02P20O	20A 250V~	Black	86	86	39	0.100	190	95	185	0.003339	0.122	495	395	205	0.040083	9.760	80	500
	600000572800	KG-T02P45O-Cable Outlet-45A Terminal-BK	KG-T02P45O	45A 250V~	Black	86	86	47	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000573800	KG-T02P8101-LED Dimmer Switch-100W-BK	KG-T02P8101	100W 220V-240V~	Black	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000573900	KG-T02P8201-Fan Control-300W-BK	KG-T02P8201	300W 220V-240V~	Black	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000574000	KG-T02P6703-Key Card Switch-16A-BK	KG-T02P6703	16A 220V-240V~	Black	86	86	43	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000573000	KG-T02P6101-TV Outlet-BK	KG-T02P6101	5-1000MHz	Black	86	86	29	0.070	190	95	185	0.003339	0.096	495	395	205	0.040083	9.600	100	500
	600000573100	KG-T02P6201-Telephone Outlet-BK	KG-T02P6201	RJ11	Black	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000573200	KG-T02P6401-Computer Outlet-BK	KG-T02P6401	RJ45 CAT6	Black	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000573400	KG-T02P6402-Computer Outlet-2G-BK	KG-T02P6402	RJ45 CAT6	Black	86	86	33	0.080	190	95	185	0.003339	0.100	495	395	205	0.040083	10.000	100	500
	600000573300	KG-T02P6503-Tel+Computer Outlet-BK	KG-T02P6503	RJ11/RJ45 CAT6	Black	86	86	33	0.075	190	95	185	0.003339	0.098	495	395	205	0.040083	9.800	100	500
	600000573500	KG-T02P6102-Satellite TV Outlet-BK	KG-T02P6102	950-2150MHZ	Black	86	86	38	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000573600	KG-T02P6501SATV+Computer Outlet-BK	KG-T02P6501	950-2150MHZ/RJ45 CAT6	Black	86	86	43	0.087	190	95	185	0.003339	0.115	495	395	205	0.040083	9.200	80	500
	600000573700	KG-T02P5401-Blank-BK	KG-T02P5401	86*86	Black	86	86	11	0.055	190	95	185	0.003339	0.061	495	395	205	0.040083	12.200	200	500
	600014010000	KG-T02P5401X-Blank-146-BK	KG-T02P5401X	86*146	Black	146	86	11	0.070	178	135	151	0.003629	0.085	370	316	284	0.033205	13.600	160	500

SWITCH AND SOCKET-Thinplus Pro Series Ivory White

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000574100	KG-T02P1611A-Switch-1G1W-16A-FRWH	KG-T02P1611A	16AX 250V~	Ivory White	86	86	32	0.080	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000574200	KG-T02P1612A-Switch-1G2W-16A-FRWH	KG-T02P1612A	16AX 250V~	Ivory White	86	86	32	0.105	190	95	185	0.003339	0.122	495	395	205	0.040083	12.200	100	500
	600000574300	KG-T02P1614A-Switch-1G4W-16A-FRWH	KG-T02P1614A	16AX 250V~	Ivory White	86	86	32	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000574400	KG-T02P1621A-Switch-2G1W-16A-FRWH	KG-T02P1621A	16AX 250V~	Ivory White	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000574500	KG-T02P1622A-Switch-2G2W-16A-FRWH	KG-T02P1622A	16AX 250V~	Ivory White	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000574600	KG-T02P1631A-Switch-3G1W-16A-FRWH	KG-T02P1631A	16AX 250V~	Ivory White	86	86	32	0.110	190	95	185	0.003339	0.135	495	395	205	0.040083	13.500	100	500
	600000574700	KG-T02P1632A-Switch-3G2W-16A-FRWH	KG-T02P1632A	16AX 250V~	Ivory White	86	86	32	0.125	190	95	185	0.003339	0.146	495	395	205	0.040083	14.600	100	500
	600000574800	KG-T02P1641A-Switch-4G1W-16A-FRWH	KG-T02P1641A	16AX 250V~	Ivory White	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000574900	KG-T02P1642A-Switch-4G2W-16A-FRWH	KG-T02P1642A	16AX 250V~	Ivory White	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014010100	KG-T02P1642AX-Switch-4G2W-16A-146-FRWH	KG-T02P1642AX	16AX 250V~	Ivory White	146	86	32	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014010200	KG-T02P1662AX-Switch-6G2W-16A-146-FRWH	KG-T02P1662AX	16AX 250V~	Ivory White	146	86	32	0.250	178	135	151	0.003629	0.251	370	316	284	0.033205	16.064	64	500
	600000575000	KG-T02P1616A-Switch-Doorbell-16A-FRWH	KG-T02P1616A	16AX 250V~	Ivory White	86	86	32	0.100	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000575100	KG-T02P1625A-Window Curtain SW-16A-FRWH	KG-T02P1625A	16AX 250V~	Ivory White	86	86	32	0.105	190	95	185	0.003339	0.127	495	395	205	0.040083	12.700	100	500
	600000575200	KG-T02P2013A-SW-Neon-DP-20A-FRWH	KG-T02P2013A	20A 250V~	Ivory White	86	86	33	0.120	190	95	185	0.003339	0.140	495	395	205	0.040083	14.000	100	500
	600000575300	KG-T02P4513A-SW-Neon-DP-45A-FRWH	KG-T02P4513A	45A 250V~	Ivory White	86	86	30	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014010300	KG-T02P4513AX-SW-Neon-DP-45A-146-FRWH	KG-T02P4513AX	45A 250V~	Ivory White	146	86	30	0.027	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600000575400	KG-T02P13713GAX-SW-DP45A+BS13A-146-FRWH	KG-T02P13713GAX	45A 250V~ 13A 250V~	Ivory White	146	86	30	0.210	178	135	151	0.003629	0.238	370	316	284	0.033205	15.232	64	500
	600000575500	KG-T02P13713GA-SW SKT-DP-BS-13A-FRWH	KG-T02P13713GA	13A 250V~	Ivory White	86	86	28	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000576000	KG-T02P8513GA-SKT-20W2USB-DP- BS13A-FRWH	KG-T02P8513GA	13A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	Ivory White	86	86	37	0.130	190	95	185	0.003339	0.149	495	395	205	0.040083	14.900	100	500
	600014010400	KG-T02P13723GAX-SW SKT-DP-BS213A-146FRWH	KG-T02P13723GAX	13A 250V~	Ivory White	146	86	28	0.160	178	135	151	0.003629	0.191	370	316	284	0.033205	12.224	64	500
	600014010500	KG-T02P8523GAX-SKT-20W2USB-DP-BS213AFRWH	KG-T02P8523GAX	13A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	Ivory White	146	86	37	0.139	178	135	151	0.003629	0.169	370	316	284	0.033205	10.816	64	500
	600000575600	KG-T02P15711DA-SW SKT-R-3P15A-FRWH	KG-T02P15711DA	15A 250V~	Ivory White	86	86	35	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000575700	KG-T02P1691106A-SW SKT-GL-3P16A-FRWH	KG-T02P1691106A	16A 250V~	Ivory White	86	86	33	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000575900	KG-T02P851106A-SKT-20W2USB-GL-3P16A-FRWH	KG-T02P851106A	16A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	Ivory White	86	86	37	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000575800	KG-T02P1691108A-SW SKT-GL-5P-16A-FRWH	KG-T02P1691108A	16A 250V~	Ivory White	86	86	33	0.103	190	95	185	0.003339	0.124	495	395	205	0.040083	12.400	100	500
	600014010600	KG-T02P1692106AX-SKT-GL3P*2*16A-146-FRWH	KG-T02P1692106AX	16A 250V~	Ivory White	146	86	33	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014010700	KG-T02P852106AX-SKT-20W2USB-GL3P*216FRWH	KG-T02P852106AX	16A 250V~; **Type-C**:5V/3A; 9V/2.22A;12V/1.67A **USB-A**:5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A**:5V/3A	Ivory White	146	86	37	0.280	178	135	151	0.003629	0.300	370	316	284	0.033205	19.200	64	500
	600000576200	KG-T02P20O-Cable Outlet20A Terminal-FRWH	KG-T02P20O	20A 250V~	Ivory White	86	86	39	0.100	190	95	185	0.003339	0.122	495	395	205	0.040083	9.760	80	500
	600000576100	KG-T02P45O-Cable Outlet45A Terminal-FRWH	KG-T02P45O	45A 250V~	Ivory White	86	86	47	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000577100	KG-T02P8101-LED Dimmer SW-100W-FRWH	KG-T02P8101	100W 220V-240V~	Ivory White	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000577200	KG-T02P8201-Fan Control-300W-FRWH	KG-T02P8201	300W 220V-240V~	Ivory White	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000577300	KG-T02P6703-Key Card Switch-16A-FRWH	KG-T02P6703	16A 220V-240V~	Ivory White	86	86	43	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000576400	KG-T02P6101-TV Outlet-FRWH	KG-T02P6101	5-1000MHz	Ivory White	86	86	29	0.070	190	95	185	0.003339	0.096	495	395	205	0.040083	9.600	100	500
	600000576300	KG-T02P6201-Telephone Outlet-FRWH	KG-T02P6201	RJ11	Ivory White	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000576500	KG-T02P6401-Computer Outlet-FRWH	KG-T02P6401	RJ45 CAT6	Ivory White	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000576600	KG-T02P6402-Computer Outlet-2G-FRWH	KG-T02P6402	RJ45 CAT6	Ivory White	86	86	33	0.080	190	95	185	0.003339	0.100	495	395	205	0.040083	10.000	100	500
	600000576700	KG-T02P6503-Tel+Computer Outlet-FRWH	KG-T02P6503	RJ11/RJ45 CAT6	Ivory White	86	86	33	0.075	190	95	185	0.003339	0.098	495	395	205	0.040083	9.800	100	500
	600000576800	KG-T02P6102-Satellite TV Outlet-FRWH	KG-T02P6102	950-2150MHZ	Ivory White	86	86	38	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000576900	KG-T02P6501SATV+Computer Outlet-FRWH	KG-T02P6501	950-2150MHZ/RJ45 CAT6	Ivory White	86	86	43	0.087	190	95	185	0.003339	0.115	495	395	205	0.040083	9.200	80	500
	600000577000	KG-T02P5401-Blank-FRWH	KG-T02P5401	86*86	Ivory White	86	86	11	0.055	190	95	185	0.003339	0.061	495	395	205	0.040083	12.200	200	500
	600014010800	KG-T02P5401X-Blank-146-FRWH	KG-T02P5401X	86*146	Ivory White	146	86	11	0.070	178	135	151	0.003629	0.085	370	316	284	0.033205	13.600	160	500

SWITCH AND SOCKET-Thinplus Pro Series Inky Gray

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	600000577400	KG-T02P1611A-Switch-1G1W-16A-FRGY	KG-T02P1611A	16AX 250V~	Inky Gray	86	86	32	0.080	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000577500	KG-T02P1612A-Switch-1G2W-16A-FRGY	KG-T02P1612A	16AX 250V~	Inky Gray	86	86	32	0.105	190	95	185	0.003339	0.122	495	395	205	0.040083	12.200	100	500
	600000577600	KG-T02P1614A-Switch-1G4W-16A-FRGY	KG-T02P1614A	16AX 250V~	Inky Gray	86	86	32	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000577700	KG-T02P1621A-Switch-2G1W-16A-FRGY	KG-T02P1621A	16AX 250V~	Inky Gray	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000577800	KG-T02P1622A-Switch-2G2W-16A-FRGY	KG-T02P1622A	16AX 250V~	Inky Gray	86	86	32	0.100	190	95	185	0.003339	0.165	495	395	205	0.040083	16.500	100	500
	600000577900	KG-T02P1631A-Switch-3G1W-16A-FRGY	KG-T02P1631A	16AX 250V~	Inky Gray	86	86	32	0.110	190	95	185	0.003339	0.135	495	395	205	0.040083	13.500	100	500
	600000578000	KG-T02P1632A-Switch-3G2W-16A-FRGY	KG-T02P1632A	16AX 250V~	Inky Gray	86	86	32	0.125	190	95	185	0.003339	0.146	495	395	205	0.040083	14.600	100	500
	600000578100	KG-T02P1641A-Switch-4G1W-16A-FRGY	KG-T02P1641A	16AX 250V~	Inky Gray	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000578200	KG-T02P1642A-Switch-4G2W-16A-FRGY	KG-T02P1642A	16AX 250V~	Inky Gray	86	86	32	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014010900	KG-T02P1642AX-Switch-4G2W-16A-146-FRGY	KG-T02P1642AX	16AX 250V~	Inky Gray	146	86	32	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014011000	KG-T02P1662AX-Switch-6G2W-16A-146-FRGY	KG-T02P1662AX	16AX 250V~	Inky Gray	146	86	32	0.250	178	135	151	0.003629	0.251	370	316	284	0.033205	16.064	64	500
	600000578300	KG-T02P1616A-Switch-Doorbell-16A-FRGY	KG-T02P1616A	16AX 250V~	Inky Gray	86	86	32	0.100	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000578400	KG-T02P1625A-Window Curtain SW-16A-FRGY	KG-T02P1625A	16AX 250V~	Inky Gray	86	86	32	0.105	190	95	185	0.003339	0.127	495	395	205	0.040083	12.700	100	500
	600000578500	KG-T02P2013A-SW-Neon-DP-20A-FRGY	KG-T02P2013A	20A 250V~	Inky Gray	86	86	33	0.120	190	95	185	0.003339	0.140	495	395	205	0.040083	14.000	100	500
	600000578600	KG-T02P4513A-SW-Neon-DP-45A-FRGY	KG-T02P4513A	45A 250V~	Inky Gray	86	86	30	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600014011100	KG-T02P4513AX-SW-Neon-DP-45A-146-FRGY	KG-T02P4513AX	45A 250V~	Inky Gray	146	86	30	0.027	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600000578700	KG-T02P13713GAX-SW-DP45A+BS13A-146-FRGY	KG-T02P13713GAX	45A 250V~ 13A 250V~	Inky Gray	146	86	30	0.210	178	135	151	0.003629	0.238	370	316	284	0.033205	15.232	64	500
	600000578800	KG-T02P13713GA-SW SKT-DP-BS-13A-FRGY	KG-T02P13713GA	13A 250V~	Inky Gray	86	86	28	0.125	190	95	185	0.003339	0.142	495	395	205	0.040083	14.200	100	500
	600000579300	KG-T02P8513GA-SKT-20W2USB-DP- BS13A-FRGY	KG-T02P8513GA	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Inky Gray	86	86	37	0.130	190	95	185	0.003339	0.149	495	395	205	0.040083	14.900	100	500
	600014011200	KG-T02P13723GAX-SW SKT-DP-BS213A-146FRGY	KG-T02P13723GAX	13A 250V~	Inky Gray	146	86	28	0.160	178	135	151	0.003629	0.191	370	316	284	0.033205	12.224	64	500
	600014011300	KG-T02P8523GAX-SKT-20W2USB-DP-BS213AFRGY	KG-T02P8523GAX	13A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Inky Gray	146	86	37	0.139	178	135	151	0.003629	0.169	370	316	284	0.033205	10.816	64	500
	600000578900	KG-T02P15711DA-SW SKT-R-3P15A-FRGY	KG-T02P15711DA	15A 250V~	Inky Gray	86	86	35	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000579000	KG-T02P1691106A-SW SKT-GL-3P16A-FRGY	KG-T02P1691106A	16A 250V~	Inky Gray	86	86	33	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000579200	KG-T02P851106A-SKT-20W2USB-GL-3P16A-FRGY	KG-T02P851106A	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Inky Gray	86	86	37	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000579100	KG-T02P1691108A-SW SKT-GL-5P-16A-FRGY	KG-T02P1691108A	16A 250V~	Inky Gray	86	86	33	0.103	190	95	185	0.003339	0.124	495	395	205	0.040083	12.400	100	500
	600014011400	KG-T02P1692106AX-SKT-GL3P*2*16A-146-FRGY	KG-T02P1692106AX	16A 250V~	Inky Gray	146	86	33	0.267	178	135	151	0.003629	0.280	370	316	284	0.033205	17.920	64	500
	600014011500	KG-T02P852106AX-SKT-20W2USB-GL3P*216FRGY	KG-T02P852106AX	16A 250V~; **Type-C:**5V/3A; 9V/2.22A;12V/1.67A **USB-A:**5V/3A; 9V/2A;12V/1.5A; **Type-C+USB-A:**5V/3A	Inky Gray	146	86	37	0.280	178	135	151	0.003629	0.300	370	316	284	0.033205	19.200	64	500
	600000579500	KG-T02P20O-Cable Outlet20A Terminal-FRGY	KG-T02P20O	20A 250V~	Inky Gray	86	86	39	0.100	190	95	185	0.003339	0.122	495	395	205	0.040083	9.760	80	500
	600000579400	KG-T02P45O-Cable Outlet45A Terminal-FRGY	KG-T02P45O	45A 250V~	Inky Gray	86	86	47	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000580400	KG-T02P8101-LED Dimmer SW-100W-FRGY	KG-T02P8101	100W 220V-240V~	Inky Gray	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000580500	KG-T02P8201-Fan Control-300W-FRGY	KG-T02P8201	300W 220V-240V~	Inky Gray	86	86	48	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000580600	KG-T02P6703-Key Card Switch-16A-FRGY	KG-T02P6703	16A 220V-240V~	Inky Gray	86	86	43	0.150	190	95	185	0.003339	0.175	495	395	205	0.040083	14.000	80	500
	600000579700	KG-T02P6101-TV Outlet-FRGY	KG-T02P6101	5-1000MHz	Inky Gray	86	86	29	0.070	190	95	185	0.003339	0.096	495	395	205	0.040083	9.600	100	500
	600000579600	KG-T02P6201-Telephone Outlet-FRGY	KG-T02P6201	RJ11	Inky Gray	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000579800	KG-T02P6401-Computer Outlet-FRGY	KG-T02P6401	RJ45 CAT6	Inky Gray	86	86	33	0.070	190	95	185	0.003339	0.091	495	395	205	0.040083	9.100	100	500
	600000579900	KG-T02P6402-Computer Outlet-2G-FRGY	KG-T02P6402	RJ45 CAT6	Inky Gray	86	86	33	0.080	190	95	185	0.003339	0.100	495	395	205	0.040083	10.000	100	500
	600000580000	KG-T02P6503-Tel+Computer Outlet-FRGY	KG-T02P6503	RJ11/RJ45 CAT6	Inky Gray	86	86	33	0.075	190	95	185	0.003339	0.098	495	395	205	0.040083	9.800	100	500
	600000580100	KG-T02P6102-Satellite TV Outlet-FRGY	KG-T02P6102	950-2150MHZ	Inky Gray	86	86	38	0.105	190	95	185	0.003339	0.120	495	395	205	0.040083	12.000	100	500
	600000580200	KG-T02P6501SATV+Computer Outlet-FRGY	KG-T02P6501	950-2150MHZ/RJ45 CAT6	Inky Gray	86	86	43	0.087	190	95	185	0.003339	0.115	495	395	205	0.040083	9.200	80	500
	600000580300	KG-T02P5401-Blank-FRGY	KG-T02P5401	86*86	Inky Gray	86	86	11	0.055	190	95	185	0.003339	0.061	495	395	205	0.040083	12.200	200	500
	600014011600	KG-T02P5401X-Blank-146-FRGY	KG-T02P5401X	86*146	Inky Gray	146	86	11	0.070	178	135	151	0.003629	0.085	370	316	284	0.033205	13.600	160	500

Power Track-Power Track P

Picture	SAP Information			Key Data		Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
	SAP code	Product Description	Model	Specification	Colour	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
	605006001700	Power track SKT E 500SURtrack+3BS SKT BK	CP-GD01-A12-B	25A 250V~	Black	500	80	64	0.8942	560	110	110	0.00678	1.3186	576	355	355	0.07259	11.867	9	118
	605006001600	Power track SKT E 500mm surface track BK	CP-GD01-12-B	25A 250V~	Black	500	80	20	0.6500	535	119	44	0.00280	0.8919	550	245	253	0.03409	8.919	10	100
	605006001800	Power track SKT E BS Socket BK	CP-GD01-1371	13A 250V~	Black	69	69	44	0.0815	73.5	73.5	51	0.00028	0.1152	326	328	330	0.03529	9.212	80	240
	605006002000	Power track SKT E US Socket BK	CP-GD01-1691	16A 250V~	Black	69	69	44	0.0814	73.5	73.5	51	0.00028	0.1151	326	328	330	0.03529	9.204	80	240
	605006001900	Power track SKT E A+C USB BK	CP-GD01-8503	USB-A:5V 3A,9V 2A,12V 1.5A Type-C:5V 3A,9V 2.22A,12V 1.67A USB-A+Type-C:5V 3A	Black	69	69	44	0.1027	73.5	73.5	51	0.00028	0.1364	326	328	330	0.03529	10.908	80	80

Ventilation Fan - Fresh Wind Series

Series	Picture	SAP Information			Key Data							Product Dimension (mm)			Product Weight	Inner Box Dimension (mm)				Gross Weight	Outer Box Dimension (mm)				Gross Weight	Racking Quantity (pcs)	MOQ
		SAP code	Product Description	Model	Rated Voltage(V)	Frequency (Hz)	Power (W)	Air Volume (m^3/min)	Noise (dB)	Cutter Size (mm)	Pipe Size (mm)	Length	Width	Height	kg/pc	Length	Width	Height	Volume (m^3)	kg/pc	Length	Width	Height	Volume (m^3)	kg/CTN		
Wall Mount		610000005600	QF-APB15-3A-6inch-WM-220V/50HZ-U2-DZ	QF-APB15-3A	220-240V	50Hz	30	3.6	43	195*195	/	236	236	120	1.26	248	240	135	0.0080	1.37	700	516	255	0.0921	13.70	10	500
		610000003000	QF-APB20-4A-8inch-WM-220V/50HZ-U2-GP	QF-APB20-4A	220-240V	50Hz	35	9	45	245*245	/	293	293	131	1.55	300	308	140	0.0129	1.99	725	315	328	0.0749	9.95	5	500
		610000003100	QF-APB25-5A-10inch-WM-220V/50HZ-U2-GP	QF-APB25-5A	220-240V	50Hz	40	12	48	295*295	/	338	338	130	1.78	340	348	140	0.0166	2.26	725	355	368	0.0947	11.30	5	500
		610000003200	QF-APB30-6A-12inch-WM-220V/50HZ-U2-GP	QF-APB30-6A	220-240V	50Hz	45	17	55	345*345	/	400	400	129	2.10	400	408	140	0.0228	2.67	725	415	428	0.1288	13.35	5	500
Wall Mount (with mask)		610000005700	QF-APB15-3H-6inch-WMM-220V/50HZ-U2-D	QF-APB15-3H	220-240V	50Hz	30	3.6	43	195*195	/	236	236	155	1.39	248	240	140	0.0083	1.62	725	516	255	0.0954	16.20	10	500
		610000003300	QF-APB20-4H-8inch-WMM-220V/50HZ-U2-GP	QF-APB20-4H	220-240V	50Hz	35	9	45	245*245	/	293	293	149	1.73	300	308	145	0.0134	2.16	750	315	328	0.0775	10.80	5	500
		610000003400	QF-APB25-5H-10inch-WMM-220V/50HZ-U2-GP	QF-APB25-5H	220-240V	50Hz	40	12	48	295*295	/	338	338	149	1.99	340	348	145	0.0172	2.47	750	355	368	0.0980	12.37	5	500
		610000003500	QF-APB30-6H-12inch-WMM-220V/50HZ-U2-GP	QF-APB30-6H	220-240V	50Hz	45	17	55	345*345	/	400	400	165	2.50	400	408	145	0.0237	3.17	750	415	428	0.1332	15.87	5	500
		610000003600	QF-APB20-4H-8inch-WMM-220V/60HZ-U2-PH	QF-APB20-4H	220-240V	60Hz	35	9	45	245*245	/	293	293	149	1.63	300	308	145	0.0134	2.07	750	315	328	0.0775	10.36	5	500
		610000003700	QF-APB25-5H-10inch-WMM-220V/60HZ-U2-PH	QF-APB25-5H	220-240V	60Hz	40	12	48	295*295	/	338	338	149	1.91	340	348	145	0.0172	2.45	750	355	368	0.0980	12.24	5	500
		610000003800	QF-APB30-6H-12inch-WMM-220V/60HZ-U2-PH	QF-APB30-6H	220-240V	60Hz	45	17	55	345*345	/	400	400	165	2.50	400	408	145	0.0237	3.17	750	415	428	0.1332	15.87	5	500
Ceiling Mount		610000003900	QF-BPT10-12A-8inch-CM-220V/50HZ-U2-GP	QF-BPT10-12A	220-240V	50Hz	30	2.0	42	205*205	100	245	245	170	1.21	252	255	176	0.0113	1.49	729	267	530	0.1032	11.95	8	500
		610000004000	QF-BPT10-22A-10inch-CM-220V/50HZ-U2-GP	QF-BPT10-22A	220-240V	50Hz	35	2.5	48	230*230~255*255	100	285	285	163	1.38	292	295	169	0.0146	1.70	701	307	610	0.1313	13.59	8	500
		610000004100	QF-BPT10-34A-12inch-CM-220V/50HZ-U2-GP	QF-BPT10-34A	220-240V	50Hz	40	3.0	52	280*280~300*300	100	340	340	163	1.70	347	350	169	0.0205	2.13	701	362	720	0.1827	17.02	8	500
		610000004200	QF-BPT10-12A-8inch-CM-220V/60HZ-U2-PH	QF-BPT10-12A	220-240V	60Hz	30	2.0	42	205*205	100	245	245	170	1.21	252	255	176	0.0113	1.50	729	267	530	0.1032	11.96	8	500
		610000004300	QF-BPT10-22A-10inch-CM-220V/60HZ-U2-PH	QF-BPT10-22A	220-240V	60Hz	35	2.5	48	230*230~255*255	100	285	285	163	1.38	292	295	169	0.0146	1.70	701	307	610	0.1313	13.60	8	500
		610000004400	QF-BPT15-34A-12inch-CM-220V/60HZ-U2-PH	QF-BPT15-34A	220-240V	60Hz	40	3.0	52	280*280~300*300	100	340	340	163	1.70	347	350	169	0.0205	2.13	701	362	720	0.1827	17.02	8	500
Window Mount		610000005800	QF-APC15-3A-6inch-WinM-220V/50HZ-U2-DZ	QF-APC15-3A	220-240V	50Hz	15	3.0	44	Φ180~183	/	200	200	65	0.58	215	210	88	0.0040	0.80	465	450	225	0.0471	8.00	10	600
		610000005900	QF-APC20-4A-8inch-WinM-220V/50HZ-U2-DZ	QF-APC20-4A	220-240V	50Hz	20	4.2	55	Φ235-238	/	260	260	80	1.00	278	275	105	0.0080	1.20	576	550	290	0.0919	12.00	10	600