



LED Performer1 Candle

Features

- Sparkling Effect
- Right Light
- Energy Saving

Benefits

- Light comes out from 5 directions and produce beautiful sparkling effect
- 300° beam angel could light wide area and ideal for use in chandeliers
- Up to 85% energy saving and 25,000hrs lifespan. Saves time and money by reducing energy consumption and maintenance costs

Application



Specification

Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Beam Angle (°)	CRI	CCT (K)	Average Lifetime(hrs)	Energy Level
LED P1 Candle E14 7W Transparent*	7	0.5	700	100	300	80	2700	25000	A+
LED P1 Candle E14 7W Frosted**	7	0.5	700	100	300	80	2700	25000	A+
LED P1 Candle E27 7W Transparent**	7	0.5	700	100	300	80	2700	25000	A+
LED P1 Candle E27 7W Frosted**	7	0.5	700	100	300	80	2700	25000	A+

*Standard Product

**E27 cap or frosted cover are Customized Products and MOQ is 5000

Electrical Supply


Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Application Conditions

IP	IP20
Operating Temperature	-20-40°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical Properties


Optical Material	PC
Housing Material	PBT + Aluminum
Finishing Colour	Golden



Packaging Information

Product Description	Single Box(1pc/box)		Outer box		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	BOX QTY (pcs/unit)
LED P1 Candle 7W	41*41*10	0.079	430*220*123	3.95	50

Light Distribution

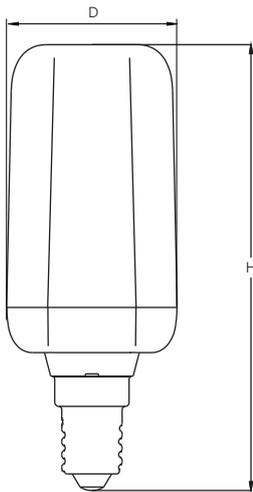

Type	H(mm)	D(mm)
LED P1 Candle 7W	102	Φ39

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN