

LED Performer1 T5 Batten


### Features

- Plastic unibody design with integrated connector
- Broad range of lengths and color temperatures
- Energy efficient

### Benefits

- Continuous light with no dark spots
- Accessory free Installation, easy to connect

### Application



### Specification


Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (K)	Life Time (hrs)
LED P1 T5 batten 310mm 3.5W	3.5	0.9	300	86	70	3000	40000
LED P1 T5 batten 310mm 3.5W	3.5	0.9	300	86	70	4000	40000
LED P1 T5 batten 310mm 3.5W	3.5	0.9	300	86	70	5700	40000
LED P1 T5 batten 570mm 7W	7	0.9	600	86	70	3000	40000
LED P1 T5 batten 570mm 7W	7	0.9	600	86	70	4000	40000
LED P1 T5 batten 570mm 7W	7	0.9	600	86	70	5700	40000
LED P1 T5 batten 870mm 10.5W	10.5	0.9	900	86	70	3000	40000
LED P1 T5 batten 870mm 10.5W	10.5	0.9	900	86	70	4000	40000
LED P1 T5 batten 870mm 10.5W	10.5	0.9	900	86	70	5700	40000
LED P1 T5 batten 1170mm 14W	14	0.9	1200	86	70	3000	40000
LED P1 T5 batten 1170mm 14W	14	0.9	1200	86	70	4000	40000
LED P1 T5 batten 1170mm 14W	14	0.9	1200	86	70	5700	40000

Application Conditions	
IP	IP20
Operating Temperature	-20-40°C
Application Temperature	25°C
Storage Environment	-25-50°C

Electrical Supply	
Frequency (Hz)	50/ 60
Voltage (V)	100-240
AC/DC	AC

Mechanical Properties	
Optical Material	PC
Housing Material	PC+Aluminum
Finishing Colour	White


CB IEC Safety



### Packaging Information

Item Description	Single Box(1pc/box)		Packaging Unit		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
LED P1 T5 batten 310mm 3.5W	333X24X40	0.135	395X215X165	4.05	30
LED P1 T5 batten 570mm 7W	633X35X234	0.186	695X215X165	5.58	30
LED P1 T5 batten 870mm 10.5W	933X30X230	0.237	995X215X165	7.11	30
LED P1 T5 batten 1170mm 14W	1233X35X324	0.289	1295X215X165	8.67	30

### Dimensional Drawing

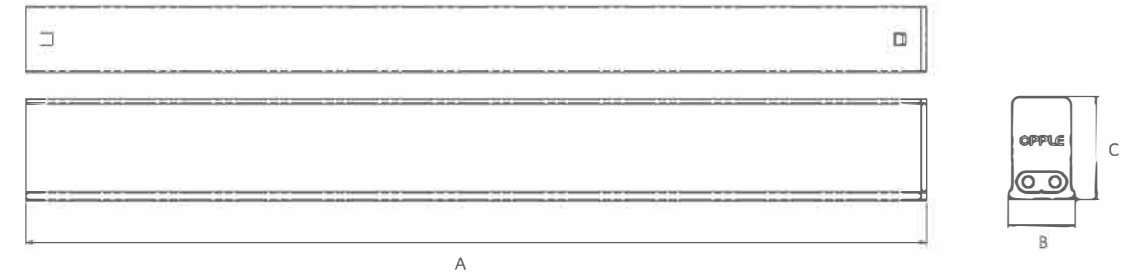

	3.5W	7W	10.5W	14W
A (mm)	300	600	900	1200
B (mm)	22.2	22.2	22.2	22.2
C (mm)	38	38	38	38