



LED Utility Strip HV


Features

- High quality
- Good flexibility for any shape
- Easy installation

Benefits

- Less than 0.1% failure rate
- Ideal choice for decoration
- Fit and forget

Application




Specification

Product Description	Power (W/m)	Power Factor	Lumen (lm/m)	CRI	CCT (K)	Life Time (hrs)
LED Utility Strip 5050	8	0.9	350	70	3000	12000
LED Utility Strip 5050	8	0.9	350	70	4000	12000
LED Utility Strip 5050	8	0.9	350	70	6500	12000
LED Utility Strip 5050 Blue	8	0.9	/	70	Blue	12000
LED Utility Strip 5050 Red	8	0.9	/	70	Red	12000

Application Conditions	
IP	20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Electrical Supply	
Frequency (Hz)	50/ 60
Voltage (V)	220-240
AC/DC	AC


Mechanical Properties	
Optical Material	High quality PVC
Housing Material	High quality PVC
Finishing Colour	Transparency

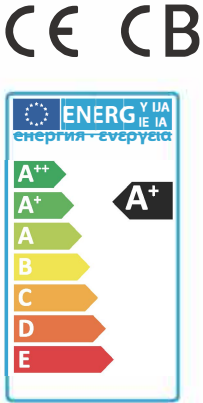

Packaging Information

Product Description	Packaging Unit			Remark
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)	
LED Utility Strip 5050	330*330*155	6.9	1	50M/roll
LED Utility Strip 5050 Blue	330*330*155	6.9	1	50M/roll
LED Utility Strip 5050 Red	330*330*155	6.9	1	50M/roll
LED U Strip 5730 Accessories Bag	280*220*160	4.4	40	
LED U Strip 5730 IOOO Fixing	280*220*220	4.0	1000	

Dimensional Drawing

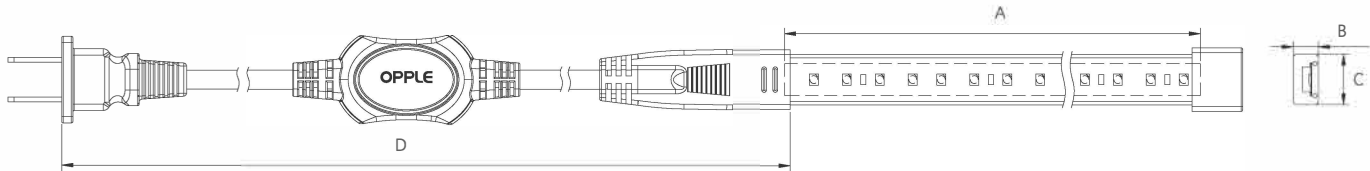

	5050
A (mm)	50000
B (mm)	7.3
C (mm)	14.5
D (mm)	800

Accessory Information



LED Strip 5050 Accessory package