



Xiaobai

Features

- Elegant structure and texture thanks to world class techniques
- Stable performance and high color rendering
- Long system lifespan, high reliability
- Integrated design, easy for installation

Benefits

- Comfort lighting making the life more exciting
- An excellent price to performance ratio
- Acrylic cover with high light transmittance rate(75%) creates a pleasant and glare-free lighting environment

Application



Home



Hotel



Retail

Specification

Item Code	Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (A)	CRI	CCT (K)	Life Time	MOQ (pcs)
140050864	LED HML 549 10W 4000K Xiaobai	10	0.50	650	65	0.09	≥80	4000	30Khrs	600

Technical Specifications	
On / Off Cycles	50,000
Colour Consistency (SDCM)	6
Dimmable	No
Finishing Colour	White
IP	20
Driver Integrated (Yes/No)	Yes
Glow Wire Test	650°C
Driver Failure Rate	1% at 5000h
Weight (kg/pc)	0.472

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Mechanical Properties	
Housing Material	PC
Optical Material	PMMA


Application Conditions	
Operating Temperature	-10~40°C
Application Temperature	25°C
Storage Environment	-25~50°C



Packaging Information

Item		Single Box(1pc/box)		Packaging Unit	
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)
140050864	LED HML 549 10W 4000K Xiaobai	596x70x60	0.633	610x300x205	7.596

Dimensional Drawing

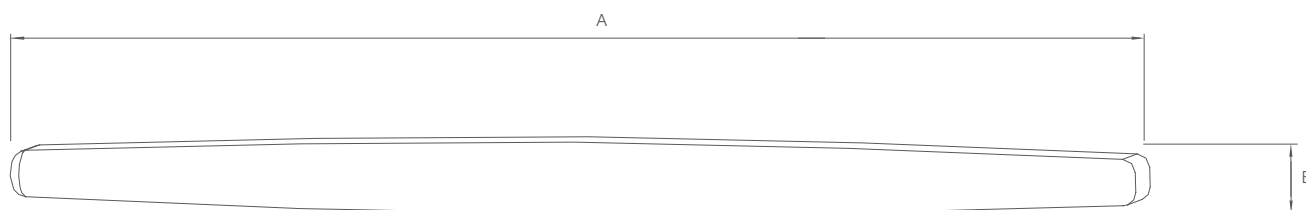

	Xiaobai
A (mm)	586
B (mm)	62

OPPLE SHANGHAI OFFICE
1999 Zhangheng Road, Building 3
Shanghai 201203 China

T +86 21 3855 0000
E intersales@opple.com

OPPLE.COM