



## LED Performer1 T8 Tube Single End

### Features

- Eye care, RGO, visual flicker free
- Great quality, lifetime 50000H, surge protection 1500V
- Professional lighting, up to 150lm/W,  
PF 0.9, SDCM <3, CRI 80

### Benefits

- Kindly care the health of eyes
- Super bright bring premium lighting experience
- Reliable and long-lasting, lower maintenance cost
- Energy saving

### Application



### Specification

Item Description	Power (W)	Power Factor	Lumen (lm)	CRI	CCT (K)	Life Time (hrs) L70
LED P1 T8 600mm 10W 840	10	0.9	1500	80	4000	50000
LED P1 T8 600mm 10W 865	10	0.9	1500	80	6500	50000
LED P1 T8 1200mm 20W 840	20	0.9	3000	80	4000	50000
LED P1 T8 1200mm 20W 865	20	0.9	3000	80	6500	50000

#### Application Conditions

IP	IP20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

#### Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC


#### Mechanical Properties

Optical Material	Glass
Housing Material	Glass
Finishing Colour	White

## Packaging Information

Item Description	Inner Box Size(mm)		Packaging Unit		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
LED P1 T8 600mm 10W	680*30*30	0.150	725*185*185	16.2	25
LED P1 T8 1200mm 20W	1290*30*30	0.250	1335*185*185	16.2	25

## Dimensional Drawing

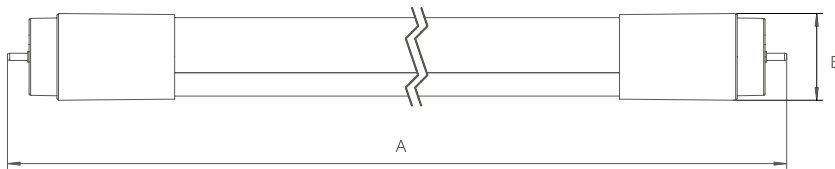

	10W	20W
A (mm)	604	1213
B (mm)	Φ25.4	Φ25.4

## Accessory Information



LED Utility T8 Empty Batten  
(Match with single-end T8 Tube)

### OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,  
Minhang District, Shanghai, China  
ZIP: 201103

**T** +86 21 3855 0000

**E** intersales@opple.com

**WWW.OPPLE.COM/EN**