



LED Performer1 Candle

Features

- Sparkling Effect
- Right Light
- Energy Saving

Benefits

- Light comes out from 5 directions and produce beautiful sparkling effect
- 300° beam angel could light wide area and ideal for use in chandeliers
- Up to 85% energy saving and 25,000hrs lifespan. Saves time and money by reducing energy consumption and maintenance costs

Application



Home



Hotel



Retail

Specification

Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Beam Angle (°)	CRI	CCT (K)	Average Lifetime(hrs)	Energy Level
LED P1 Candle E14 7W Transparent*	7	0.5	700	100	300	80	2700	25000	A+
LED P1 Candle E14 7W Frosted**	7	0.5	700	100	300	80	2700	25000	A+

*Standard Product

**E27 cap or frosted cover are Customized Products and MOQ is 5000

Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

Application Conditions

IP	IP20
Operating Temperature	-20-40°C
Application Temperature	25°C
Storage Environment	-25-50°C


Mechanical Properties

Optical Material	PC
Housing Material	PBT + Aluminum
Finishing Colour	Golden

Packaging Information

Product Description	Single Box(1pc/box)		Outer box		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	BOX QTY (pcs/unit)
LED P1 Candle 7W	41*41*10	0.079	430*220*123	3.95	50

Light Distribution

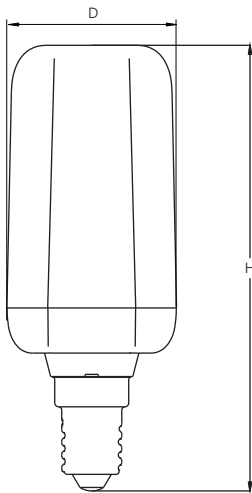

Type	H(mm)	D(mm)
LED P1 Candle 7W	102	Φ39

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN