



LED Emergency Exit Luminaire


Features

- big size and more visible on side
- High brightness and uniform luminance
- Multiple installation options:recessed,suspend or wall mounted

Benefits

- Easier installation
- Safe and reliable
- Suitable for more installation environments

Application



Specification

Item Code	Item Description	Product Mark	Power (W)	Mounting type	Brightness (cd/m ²)	Emergency Time (min)	Charging Time (Hrs)	Lifetime (L70B50)
549001024410	OP-BLZD-1LROE 3W-Z104-Re-EXIT		3	Recessed	≥50	≥90	≤20	20000
549001024510	OP-BLZD-1LROE 3W-Z104-Re-DEXIT		3	Recessed	≥50	≥90	≤20	20000
549001024610	OP-BLZD-1LROE 3W-Z104-Re-LEXIT		3	Recessed	≥50	≥90	≤20	20000
549001024710	OP-BLZD-1LROE 3W-Z104-Re-REXIT		3	Recessed	≥50	≥90	≤20	20000
549001024810	OP-BLZD-2LROE 3W-Z103-Sp-EXIT-D		3	Suspendent	≥50	≥90	≤20	20000
549001024910	OP-BLZD-2LROE 3W-Z103-Sp-SEXIT-D		3	Suspendent	≥50	≥90	≤20	20000
549001025010	OP-BLZD-2LROE 3W-Z103-Sp-DEXIT-D		3	Suspendent	≥50	≥90	≤20	20000
549001025110	OP-BLZD-1LROE 3W-Z103-Wall-EXIT-S		3	wall mounted	≥50	≥90	≤20	20000
549001025210	OP-BLZD-1LROE 3W-Z103-Wall-DEXIT-S		3	wall mounted	≥50	≥90	≤20	20000
549001025310	OP-BLZD-1LROE 3W-Z103-Wall-LEXIT-S		3	wall mounted	≥50	≥90	≤20	20000
549001025410	OP-BLZD-1LROE 3W-Z103-Wall-REXIT-S		3	wall mounted	≥50	≥90	≤20	20000

Technical Specifications

House colour	Silver/White
battery type	Ni-Cd
Driver integrated(Yes/ON)	Yes
Protection class	I
IP	30
Weight (kg/Pc)	0.443/0.52

Mechanical Properties

Housing Material	Al+PP
Optical Material	Glass

Electrical Supply


Frequency (Hz)	50/60
Voltage (V)	220~240
AC / DC	AC

Application Conditions



Operating Temperature	0° ~+40°C
Application Temperature	25°C
Storage Environment	-20°C~60°C

Packaging Information

Item		Single Box(1pc/box)		Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
549001024410	OP-BLZD-1LROE 3W-Z104-Re-EXIT	L370xW53xH180mm	0.6	L570xW388xH380mm	13.5	20
549001024510	OP-BLZD-1LROE 3W-Z104Re-DEXIT	L370xW53xH180mm	0.6	L570xW388xH380mm	13.5	20
549001024610	OP-BLZD-1LROE 3W-Z104-Re-LEXIT	L370xW53xH180mm	0.6	L570xW388xH380mm	13.5	20
549001024710	OP-BLZD-1LROE 3W-Z104-Re-REXIT	L370xW53xH180mm	0.6	L570xW388xH380mm	13.5	20
549001024810	OP-BLZD-2LROE 3W-Z103-Sp-EXIT-D	L370xW53xH180mm	0.557	L570xW388xH380mm	22.28	40
549001024910	OP-BLZD-2LROE 3W-Z103-Sp-SEXIT-D	L370xW53xH180mm	0.557	L570xW388xH380mm	22.28	40
549001025010	OP-BLZD-2LROE 3W-Z103-Sp-DEXIT-D	L370xW53xH180mm	0.557	L570xW388xH380mm	22.28	40
549001025110	OP-BLZD-1LROE 3W-Z103-Wall-EXIT-S	L370xW53xH180mm	0.539	L570xW388xH380mm	21.56	40
549001025210	OP-BLZD-1LROE 3W-Z103-Wall-DEXIT-S	L370xW53xH180mm	0.539	L570xW388xH380mm	21.56	40
549001025310	OP-BLZD-1LROE 3W-Z103-Wall-LEXIT-S	L370xW53xH180mm	0.539	L570xW388xH380mm	21.56	40
549001025410	OP-BLZD-1LROE 3W-Z103-Wall-REXIT-S	L370xW53xH180mm	0.539	L570xW388xH380mm	21.56	40

Picture	Accessory			Outer box		
	Item Code	Item Description	cutout	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
	549098002010	OP-Z104-Recessedbox	L346×W147×H36mm	L555xW360xH605mm	22	60

Dimensional Drawing

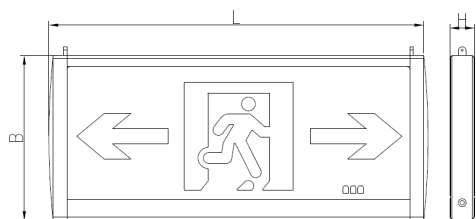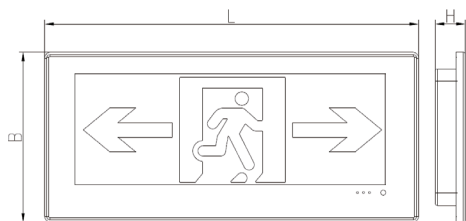

Mounting type	Model	L(mm)	B(mm)	H(mm)
Recessed	OP-BLZD-1LROE 3W-Z104	360	166	30
wall mounted	OP-BLZD-1LROE 3W-Z103	355	155	23
Suspendent	OP-BLZD-2LROE 3W-Z103	355	155	23

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,

Minhang District, Shanghai, China

ZIP: 201103

T +86 213855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN