

LED Wall Light

Features

- IP65 water and dust proof
- Up to 105Lm/w
- 50KHrs Lifespan

Benefits

- Outstanding waterproof design
- Slim compact design
- Impact resistant ,long life,low maintenance cost

Application



Villa



Garden



Corridor



Wall



Building



Warehouse

Specification

Item Code	Item Description	Power (W)	Power Factor	Lumen(lm)	Efficacy(lm/W)	Input Current(mA)	Life Time (L70B50)	MOQ (pcs)
715000002510	LEDWallLight-10W-3000K-15D-BL-GP	10	0.9	750	75	50	50000	1000
715000002410	LEDWallLight-10W-4000K-15D-BL-GP	10	0.9	800	80	50	50000	1000
715000002310	LEDWallLight-10W-3000K-15D-WH-GP	10	0.9	750	75	50	50000	1000
715000002210	LEDWallLight-10W-4000K-15D-WH-GP	10	0.9	800	80	50	50000	1000
715000002110	LEDWallLight-20W-3000K-15D-BL-GP	20	0.9	2000	100	90	50000	1000
715000002010	LEDWallLight-20W-4000K-15D-BL-GP	20	0.9	2100	105	90	50000	1000
715000001910	LEDWallLight-20W-3000K-15D-WH-GP	20	0.9	2000	100	90	50000	1000
715000001810	LEDWallLight-20W-4000K-15D-WH-GP	20	0.9	2100	105	90	50000	1000

Technical Specifications

CRI	≥ 80
Colour Consistency (SDCM)	6
Dimmable	No
Housing Colour	White/black
IP	IP65
IK	IK06
Driver integrated (Yes/No)	Yes
Glow wire test	650° C
Driver failure rate	1% at 5000h
Weight (kg/pc)	0.6/0.9

Electrical Supply

Frequency (Hz)	50 / 60
Voltage (V)	100-240
AC / DC	AC

Mechanical Properties

Driver Housing material	Die-cast Aluminium
Reflector Material	PC


Application Conditions

Operating Temperature	-25-45°C
Application Temperature	25°C
Storage Environment	-20-65°C

Packaging Information


Item		Single Box(1pc/box)		Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
715000002510	LEDWallLight-10W-3000K-15D-BL-GP	235*110*145	0.72	485*345*460	13.5	18
715000002410	LEDWallLight-10W-4000K-15D-BL-GP	235*110*145	0.72	485*345*460	13.5	18
715000002310	LEDWallLight-10W-3000K-15D-WH-GP	235*110*145	0.72	485*345*460	13.5	18
715000002210	LEDWallLight-10W-4000K-15D-WH-GP	235*110*145	0.72	485*345*460	13.5	18
715000002110	LEDWallLight-20W-3000K-15D-BL-GP	235*110*145	1.02	485*345*460	19	18
715000002010	LEDWallLight-20W-4000K-15D-BL-GP	235*110*145	1.02	485*345*460	19	18
715000001910	LEDWallLight-20W-3000K-15D-WH-GP	235*110*145	1.02	485*345*460	19	18
715000001810	LEDWallLight-20W-4000K-15D-WH-GP	235*110*145	1.02	485*345*460	19	18

Dimensional Drawing

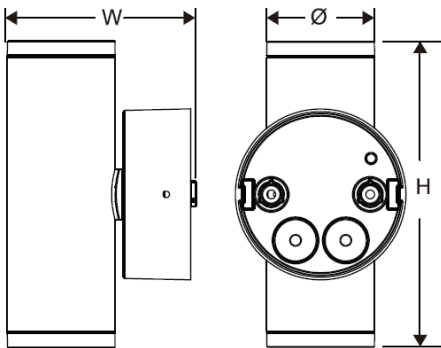

Model	Ø(mm)	W (mm)	H(mm)
LED WL-E 10W	60	105	170
LED WL-E 20W	76	121	200

Photometric Data

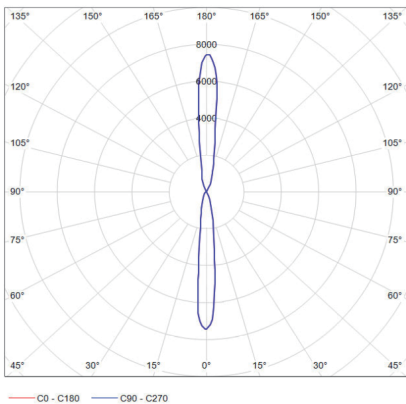

OPPLE SHANGHAI OFFICE
 Building V3, The Mixc, 1799 Wuzhong Road,
 Minhang District, Shanghai, China
 ZIP: 201103
T +86 21 3855 0000
E intersales@opple.com

WWW.OPPLE.COM/EN