

LED Linear E3

Application



High PF



Up to 110 lm/W



Flicker Free



No Blue Light



Seamless Connection



Multiple Connection way



30000 hrs+

6yrs Care Free



Library



Office



Shopping Mall



Conference Room

Specification

Item Code	Item Description	Power (W)	Power Factor	CCT (K)	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
529002045100	LED Linear-EIII-20W-1.2m-40-857-RE	20	0.95	5700	2000	100	96	30000	500
529002045200	LED Linear-EIII-20W-1.2m-60-857-RE	20	0.95	5700	2200	110	96	30000	500
529002045300	LED Linear-EIII-30W-1.2m-80-857-RE	30	0.95	5700	3300	110	144	30000	500
529002045400	LED Linear-EIII-30W-1.2m-100-857-RE	30	0.95	5700	3300	110	144	30000	500
529002045500	LED Linear-EIII-40W-1.2m-120-857-RE	40	0.95	5700	4400	110	191	30000	500
529002045600	LED Linear-EIII-40W-1.2m-150-857-RE	40	0.95	5700	4400	110	191	30000	500
529000111600	LED Linear-EIII-20W-1.2m-60-857-SP	20	0.95	5700	2200	110	96	30000	500
529000111700	LED Linear-EIII-30W-1.2m-80-857-SP	30	0.95	5700	3300	110	144	30000	500
529000111800	LED Linear-EIII-30W-1.2m-100-857-SP	30	0.95	5700	3300	110	144	30000	500
529000112000	LED Linear-EIII-40W-1.2m-120-857-SP	40	0.95	5700	4400	110	191	30000	500
529000112100	LED Linear-EIII-40W-1.2m-150-857-SP	40	0.95	5700	4400	110	191	30000	500
529002045700	LED Linear-EIII-20W-1.2m-40-857-RE-CONN	20	0.9	5700	1600	80	700	30000	500
529002045800	LED Linear-EIII-30W-1.2m-60-857-RE-CONN	30	0.9	5700	2550	85	1050	30000	500
529002045900	LED Linear-EIII-30W-1.2m-80-857-RE-CONN	30	0.9	5700	2550	85	1050	30000	500
529002046000	LED Linear-EIII-30W-1.2m-100-857-RE-CONN	30	0.9	5700	2550	85	1050	30000	500
529002046100	LED Linear-EIII-40W-1.2m-120-857-RE-CONN	40	0.9	5700	3400	85	1400	30000	500
529002046200	LED Linear-EIII-40W-1.2m-150-857-RE-CONN	40	0.9	5700	3400	85	1400	30000	500
529002046300	LED Linear-EIII-20W-1.2m-40-82757-RE-CONN	20	0.9	2700K-5700	1700	85	700	30000	500
529002046400	LED Linear-EIII-30W-1.2m-60-82757-RE-CONN	30	0.9	2700K-5700	2550	85	1050	30000	500
529002046500	LED Linear-EIII-30W-1.2m-80-82757-RE-CONN	30	0.9	2700K-5700	2550	85	1050	30000	500
529002046600	LED Linear-EIII-30W-1.2m-100-82757-RE-CONN	30	0.9	2700K-5700	2550	85	1050	30000	500
529002046700	LED Linear-EIII-40W-1.2m-120-82757-RE-CONN	40	0.9	2700K-5700	3400	85	1400	30000	500
529002046800	LED Linear-EIII-40W-1.2m-150-82757-RE-CONN	40	0.9	2700K-5700	3400	85	1400	30000	500

Specification

Item Code	Item Description	Power (W)	Power Factor	CCT (K)	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
529000112200	LED Linear-EIII-30W-1.2m-60-857-SP-CONN	30	0.9	5700	2550	85	1050	30000	500
529000112300	LED Linear-EIII-30W-1.2m-80-857-SP-CONN	30	0.9	5700	2550	85	1050	30000	500
529000112400	LED Linear-EIII-30W-1.2m-100-857-SP-CONN	30	0.9	5700	2550	85	1050	30000	500
529000112500	LED Linear-EIII-40W-1.2m-120-857-SP-CONN	40	0.9	5700	3400	85	1400	30000	500
529000112600	LED Linear-EIII-40W-1.2m-150-857-SP-CONN	40	0.9	5700	3400	85	1400	30000	500
529000112700	LED Linear-EIII-30W-1.2m-60-82757-SP-CONN	30	0.9	2700K-5700	2550	85	1050	30000	500
529000112800	LED Linear-EIII-30W-1.2m-80-82757-SP-CONN	30	0.9	2700K-5700	2550	85	1050	30000	500
529000112900	LED Linear-EIII-30W1.2m-100-82757-SP-CONN	30	0.9	2700K-5700	2550	85	1050	30000	500
529000113000	LED Linear-EIII-40W1.2m-120-82757-SP-CONN	40	0.9	2700K-5700	3400	85	1400	30000	500
529000113100	LED Linear-EIII-40W1.2m-150-82757-SP-CONN	40	0.9	2700K-5700	3400	85	1400	30000	500
529000118300	LED Linear-EIII-15W-0.6m-60-857-SP-CONN	15	0.9	5700	1275	85	550	30000	500
529000118400	LED Linear-EIII-15W-0.6m-80-857-SP-CONN	15	0.9	5700	1275	85	550	30000	500
529000118500	LED Linear-EIII-15W-0.6m-100-857-SP-CONN	15	0.9	5700	1275	85	550	30000	500
529000118600	LED Linear-EIII-20W-0.6m-120-857-SP-CONN	20	0.9	5700	1700	85	700	30000	500
529000118700	LED Linear-EIII-20W-0.6m-150-857-SP-CONN	20	0.9	5700	1700	85	700	30000	500
529000118800	LED Linear-EIII-15W-0.6m-60-82757-SP-CONN	15	0.9	2700K-5700	1275	85	550	30000	500
529000118900	LED Linear-EIII-15W-0.6m-80-82757-SP-CONN	15	0.9	2700K-5700	1275	85	550	30000	500
529000119000	LED Linear-EIII-15W0.6m-100-82757-SP-CONN	15	0.9	2700K-5700	1275	85	550	30000	500
529000119100	LED Linear-EIII-20W0.6m-120-82757-SP-CONN	20	0.9	2700K-5700	1700	85	700	30000	500
529000119200	LED Linear-EIII-20W0.6m-150-82757-SP-CONN	20	0.9	2700K-5700	1700	85	700	30000	500
529002059800	LED Linear-EIII-10W-0.6m-40-857-RE-CONN	10	0.9	5700	800	80	350	30000	500
529002059900	LED Linear-EIII-15W-0.6m-60-857-RE-CONN	15	0.9	5700	1275	85	550	30000	500
529002060000	LED Linear-EIII-15W-0.6m-80-857-RE-CONN	15	0.9	5700	1275	85	550	30000	500
529002060100	LED Linear-EIII-15W-0.6m-100-857-RE-CONN	15	0.9	5700	1275	85	550	30000	500
529002060200	LED Linear-EIII-20W-0.6m-120-857-RE-CONN	20	0.9	5700	1700	85	700	30000	500
529002060300	LED Linear-EIII-20W-0.6m-150-857-RE-CONN	20	0.9	5700	1700	85	700	30000	500
529002060400	LED Linear-EIII-10W-0.6m-40-82757-RE-CONN	10	0.9	2700K-5700	800	80	350	30000	500
529002060500	LED Linear-EIII-15W-0.6m-60-82757-RE-CONN	15	0.9	2700K-5700	1275	85	550	30000	500
529002060600	LED Linear-EIII-15W-0.6m-80-82757-RE-CONN	15	0.9	2700K-5700	1275	85	550	30000	500
529002060700	LED Linear-EIII-15W0.6m-100-82757-RE-CONN	15	0.9	2700K-5700	1275	85	550	30000	500
529002060800	LED Linear-EIII-20W0.6m-120-82757-RE-CONN	20	0.9	2700K-5700	1700	85	700	30000	500
529002060900	LED Linear-EIII-20W0.6m-150-82757-RE-CONN	20	0.9	2700K-5700	1700	85	700	30000	500
529002046900	LED Linear-EIII-60-857-RE-L	15	0.9	5700			550	30000	500
529002047000	LED Linear-EIII-60-857-RE-T	15	0.9	5700			550	30000	500
529002047100	LED Linear-EIII-60-857-RE-十	15	0.9	5700			550	30000	500
529002047200	LED Linear-EIII-80-857-RE-L	15	0.9	5700			550	30000	500
529002047300	LED Linear-EIII-80-857-RE-T	15	0.9	5700			550	30000	500
529002047400	LED Linear-EIII-80-857-RE-十	15	0.9	5700			550	30000	500
529002047500	LED Linear-EIII-100-857-RE-L	15	0.9	5700			550	30000	500
529002047600	LED Linear-EIII-100-857-RE-T	15	0.9	5700			550	30000	500
529002047700	LED Linear-EIII-100-857-RE-十	15	0.9	5700			550	30000	500
529000113200	LED Linear-EIII-60-857-SP-L	15	0.9	5700			550	30000	500
529000113300	LED Linear-EIII-60-857-SP-T	15	0.9	5700			550	30000	500
529000113400	LED Linear-EIII-60-857-SP-十	15	0.9	5700			550	30000	500
529000113500	LED Linear-EIII-80-857-SP-L	15	0.9	5700			550	30000	500
529000113600	LED Linear-EIII-80-857-SP-T	15	0.9	5700			550	30000	500
529000113700	LED Linear-EIII-80-857-SP-十	15	0.9	5700			550	30000	500
529000113800	LED Linear-EIII-100-857-SP-L	15	0.9	5700			550	30000	500
529000113900	LED Linear-EIII-100-857-SP-T	15	0.9	5700			550	30000	500
529000114000	LED Linear-EIII-100-857-SP-十	15	0.9	5700			550	30000	500

Technical Specification	
CRI	80
Colour Consistency(SDCM)	≤5
Dimmable	Yes (For Some Models)
Housing Colour	Silver White
IP	IP20
IK	IK02
Glow wire test	650 C

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC / DC	AC

Mechanical and Finishing Properties	
Housing Material	Aluminum
Optical Material	PC

Application Conditions	
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Accessory

Item		Outer box		MOQ
Item Code	Item Description	Dimensions(mm) (LxWxH)	Packing Qty (pcs/CTN)	
529098032900	LED Linear-EIII-End Cap-40-RE (2pcs)	610*248*228	160	500
529098033000	LED Linear-EIII-End Cap-60-RE (2pcs)	610*248*228	120	500
529098033100	LED Linear-EIII-End Cap-80-RE (2pcs)	610*248*228	120	500
529098033200	LED Linear-EIII-End Cap-100-RE (2pcs)	425*345*135	100	500
529098033300	LED Linear-EIII-End Cap-120-RE (2pcs)	425*345*155	100	500
529098033400	LED Linear-EIII-End Cap-150-RE (2pcs)	425*345*185	100	500
529098033500	LED Linear-EIII-End Cap-60-SP (2pcs)	610*248*228	120	500
529098033600	LED Linear-EIII-End Cap-80-SP (2pcs)	610*248*228	120	500
529098033700	LED Linear-EIII-End Cap-100-SP (2pcs)	425*345*135	100	500
529098033800	LED Linear-EIII-End Cap-120-SP (2pcs)	425*345*155	100	500
529098033900	LED Linear-EIII-End Cap-150-SP (2pcs)	425*345*185	100	500
529098034000	LED Linear-EIII-Cover-W40-20m	800*800*40	1	500
529098034100	LED Linear-EIII-Cover-W60-20m	800*800*60	1	500
529098034200	LED Linear-EIII-Cover-W80-20m	800*800*80	1	500
529098034300	LED Linear-EIII-Cover-W100-20m	800*800*100	1	500
529098034400	LED Linear-EIII-Cover-W120-20m	800*800*120	1	500
529098034500	LED Linear-EIII-Cover-W150-20m	800*800*150	1	500
529098035600	LED Linear-EIII-Connector-RE-40/60/80	290*250*200	200	500
529098035700	LED Linear-EIII-Connector-RE-100/120/150	250*235*165	80	500
529098035800	LED Linear-EIII-Connector-SP-60/80	290*250*200	40	500
529098035900	LED Linear-EIII-Connector-SP-100/120/150	290*250*200	40	500
529098036000	LED Linear-EIII-Input Wire	365*255*217	100	500
529098036100	LED Linear-EIII-Input Wire-Tunable	365*255*217	100	500
529098036200	LED Linear-EIII-80/100 Ceiling Kit	290*250*200	40	500
529098036300	LED Linear-EIII-Driver Ceiling Box	430*310*230	20	500
599007083600	Suspended rope-single lamp	225*225*240	40	500
529098037500	LED Linear-EIII-Suspended Kit	290*250*200	40	500
820009006900	Driver-OP-IDSVC0800024S2-01-LED Linear-EIII-Tunable 80W	335*320*230	40	500
820009007100	Driver-OP-DY220/200-24CV/2-WB-LED Linear-EIII-Tunable 200W	335*260*180	20	500
822006000100	OP-RY-IOT-CBX-QLV3-SIG	275*275*140	180	500
820009002200	Driver-OP-IESVC0360024E1-01-36W 24V	420*270*255	60	500
820009000900	Driver-OP-IESVC0600024E1-01-60W 24V	395*250*175	30	500
820009000700	Driver-OP-IESVC1200024E1-01-120W 24V	395*310*175	30	500
820009002500	Driver-OP-IESVC2400024E1-01-240W 24V	355*300*255	30	500
820001002200	Driver-OP-IESVH0800024E1-01-Kunlun Lite-24V 80W	315*220*205	30	500
820001002300	Driver-OP-IESVH1500024E1-01-Kunlun Lite-24V150W	405*220*205	30	500
820001002400	Driver-OP-IESVH3000024E1-01-Kunlun Lite-24V300W	465*220*205	30	500

Packaging Information


Item		Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
529002045100	LED Linear-EIII-20W-1.2m-40-857-RE	1282*322*197	1.02	6
529002045200	LED Linear-EIII-20W-1.2m-60-857-RE	1282*385*197	1.05	6
529002045300	LED Linear-EIII-30W-1.2m-80-857-RE	1282*445*197	1.27	6
529002045400	LED Linear-EIII-30W-1.2m-100-857-RE	1322*340*196	2.65	4
529002045500	LED Linear-EIII-40W-1.2m-120-857-RE	1282*385*197	1.90	4
529002045600	LED Linear-EIII-40W-1.2m-150-857-RE	1282*445*197	2.02	4
529000111600	LED Linear-EIII-20W-1.2m-60-857-SP	1270*270*172	0.99	6
529000111700	LED Linear-EIII-30W-1.2m-80-857-SP	1270*330*172	1.17	6
529000111800	LED Linear-EIII-30W-1.2m-100-857-SP	1270*390*172	1.67	6
529000112000	LED Linear-EIII-40W-1.2m-120-857-SP	1270*312*172	1.95	4
529000112100	LED Linear-EIII-40W-1.2m-150-857-SP	1270*372*172	2.06	4
529002045700	LED Linear-EIII-20W-1.2m-40-857-RE-CONN	1282*322*197	0.96	6
529002045800	LED Linear-EIII-30W-1.2m-60-857-RE-CONN	1282*385*197	0.99	6
529002045900	LED Linear-EIII-30W-1.2m-80-857-RE-CONN	1282*445*197	1.17	6
529002046000	LED Linear-EIII-30W-1.2m-100-857-RE-CONN	1282*345*197	1.85	4
529002046100	LED Linear-EIII-40W-1.2m-120-857-RE-CONN	1282*385*197	1.90	4
529002046200	LED Linear-EIII-40W-1.2m-150-857-RE-CONN	1282*445*197	2.02	4
529002046300	LED Linear-EIII-20W-1.2m-40-82757-RE-CONN	1282*322*197	0.96	6
529002046400	LED Linear-EIII-30W-1.2m-60-82757-RE-CONN	1282*385*197	0.99	6
529002046500	LED Linear-EIII-30W-1.2m-80-82757-RE-CONN	1282*445*197	1.17	6
529002046600	LED Linear-EIII-30W1.2m-100-82757-RE-CONN	1282*345*197	1.85	4
529002046700	LED Linear-EIII-40W1.2m-120-82757-RE-CONN	1282*385*197	1.90	4
529002046800	LED Linear-EIII-40W1.2m-150-82757-RE-CONN	1282*445*197	2.02	4
529000112200	LED Linear-EIII-30W-1.2m-60-857-SP-CONN	1270*270*172	1.01	6
529000112300	LED Linear-EIII-30W-1.2m-80-857-SP-CONN	1270*330*172	1.08	6
529000112400	LED Linear-EIII-30W-1.2m-100-857-SP-CONN	1270*390*172	1.67	6
529000112500	LED Linear-EIII-40W-1.2m-120-857-SP-CONN	1270*312*172	1.95	4
529000112600	LED Linear-EIII-40W-1.2m-150-857-SP-CONN	1270*372*172	2.06	4
529000112700	LED Linear-EIII-30W-1.2m-60-82757-SP-CONN	1270*270*172	1.01	6
529000112800	LED Linear-EIII-30W-1.2m-80-82757-SP-CONN	1270*330*172	1.08	6
529000112900	LED Linear-EIII-30W1.2m-100-82757-SP-CONN	1270*390*172	1.67	6
529000113000	LED Linear-EIII-40W1.2m-120-82757-SP-CONN	1270*312*172	1.95	4
529000113100	LED Linear-EIII-40W1.2m-150-82757-SP-CONN	1270*372*172	2.06	4
529000118300	LED Linear-EIII-15W-0.6m-60-857-SP-CONN	662*270*172	1.98	6
529000118400	LED Linear-EIII-15W-0.6m-80-857-SP-CONN	662*330*172	1.98	6
529000118500	LED Linear-EIII-15W-0.6m-100-857-SP-CONN	662*390*172	1.98	6
529000118600	LED Linear-EIII-20W-0.6m-120-857-SP-CONN	662*312*172	2.06	4
529000118700	LED Linear-EIII-20W-0.6m-150-857-SP-CONN	662*372*172	2.06	4
529000118800	LED Linear-EIII-15W-0.6m-60-82757-SP-CONN	662*270*172	1.98	6
529000118900	LED Linear-EIII-15W-0.6m-80-82757-SP-CONN	662*330*172	1.98	6
529000119000	LED Linear-EIII-15W0.6m-100-82757-SP-CONN	662*390*172	1.98	6
529000119100	LED Linear-EIII-20W0.6m-120-82757-SP-CONN	662*312*172	2.06	4
529000119200	LED Linear-EIII-20W0.6m-150-82757-SP-CONN	662*372*172	2.06	4
529002059800	LED Linear-EIII-10W-0.6m-40-857-RE-CONN	662*322*197	1.83	6
529002059900	LED Linear-EIII-15W-0.6m-60-857-RE-CONN	662*385*197	1.98	6
529002060000	LED Linear-EIII-15W-0.6m-80-857-RE-CONN	662*445*197	1.98	6
529002060100	LED Linear-EIII-15W-0.6m-100-857-RE-CONN	662*345*197	2.06	4
529002060200	LED Linear-EIII-20W-0.6m-120-857-RE-CONN	662*385*197	2.06	4
529002060300	LED Linear-EIII-20W-0.6m-150-857-RE-CONN	662*445*197	2.06	4
529002060400	LED Linear-EIII-10W-0.6m-40-82757-RE-CONN	662*322*197	1.83	6
529002060500	LED Linear-EIII-15W-0.6m-60-82757-RE-CONN	662*385*197	1.98	6
529002060600	LED Linear-EIII-15W-0.6m-80-82757-RE-CONN	662*445*197	1.98	6
529002060700	LED Linear-EIII-15W0.6m-100-82757-RE-CONN	662*345*197	2.06	4
529002060800	LED Linear-EIII-20W0.6m-120-82757-RE-CONN	662*385*197	2.06	4

Packaging Information


Item			Outer box	
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
529002060900	LED Linear-EIII-20W0.6m-150-82757-RE-CONN	662*445*197	2.06	64
529002046900	LED Linear-EIII-60-857-RE-L	590*405*250	0.77	6
529002047000	LED Linear-EIII-60-857-RE-T	590*405*250	0.77	6
529002047100	LED Linear-EIII-60-857-RE-+	590*412*370	0.77	6
529002047200	LED Linear-EIII-80-857-RE-L	590*415*280	0.77	6
529002047300	LED Linear-EIII-80-857-RE-T	590*392*280	0.77	6
529002047400	LED Linear-EIII-80-857-RE-+	590*432*390	0.77	6
529002047500	LED Linear-EIII-100-857-RE-L	590*415*280	0.77	6
529002047600	LED Linear-EIII-100-857-RE-T	590*392*280	0.77	6
529002047700	LED Linear-EIII-100-857-RE-+	590*432*390	0.77	6
529000113200	LED Linear-EIII-60-857-SP-L	570*392*230	0.65	10
529000113300	LED Linear-EIII-60-857-SP-T	570*392*230	0.65	10
529000113400	LED Linear-EIII-60-857-SP-+	590*412*370	0.70	10
529000113500	LED Linear-EIII-80-857-SP-L	570*392*260	0.65	10
529000113600	LED Linear-EIII-80-857-SP-T	570*392*260	0.65	10
529000113700	LED Linear-EIII-80-857-SP-+	590*432*390	0.70	10
529000113800	LED Linear-EIII-100-857-SP-L	570*392*260	0.65	10
529000113900	LED Linear-EIII-100-857-SP-T	570*392*260	0.65	10
529000114000	LED Linear-EIII-100-857-SP-+	590*432*390	0.70	10

Dimensional Drawing


20W-1200-60-SP

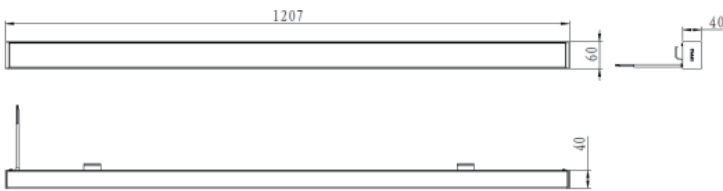


30W-1200-100-SP

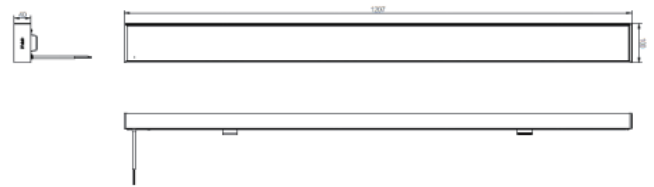


30W-1200-80-SP

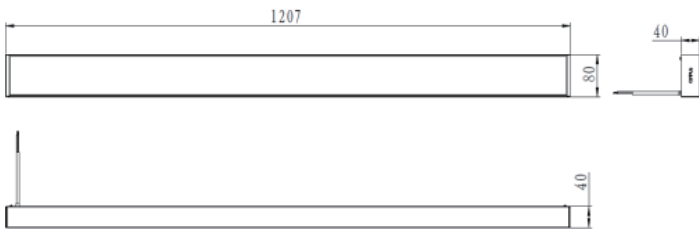


40W-1200-100-SP

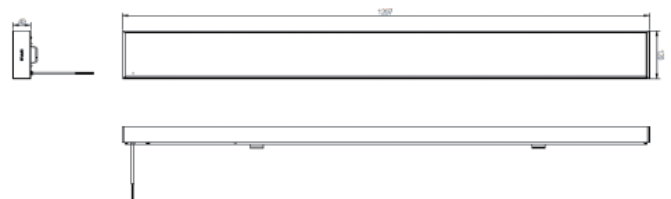


40W-1200-150-SP

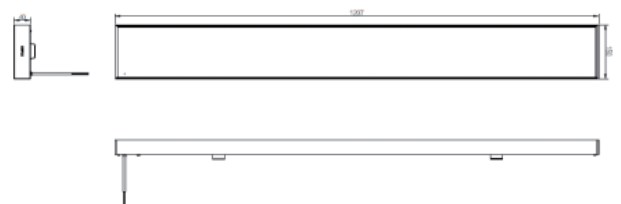


20W-1200-40-RE

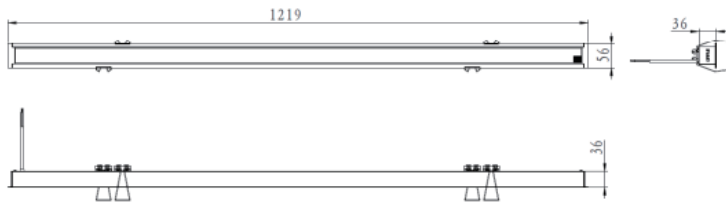


30W-1200-100-RE

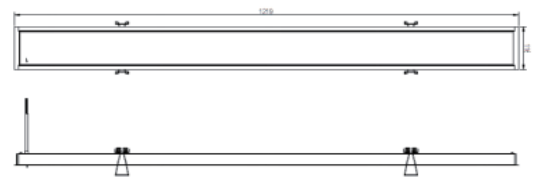


20W-1200-60-RE

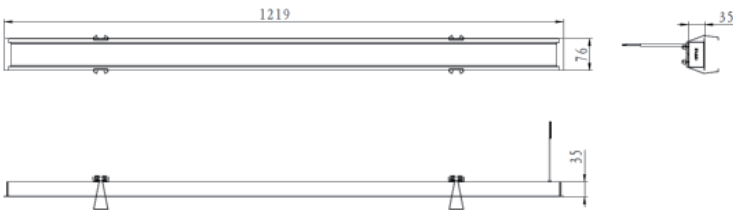

40W-1200-120-RE

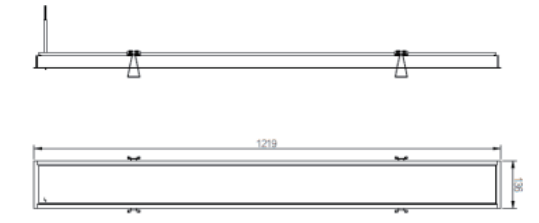


30W-1200-80-RE

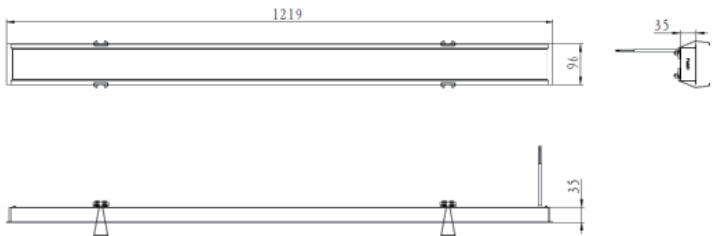


40W-1200-150-RE




Photometric Data

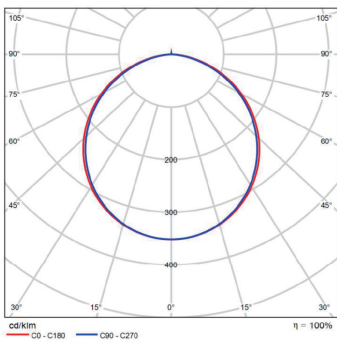


20W-1.2m-40-857

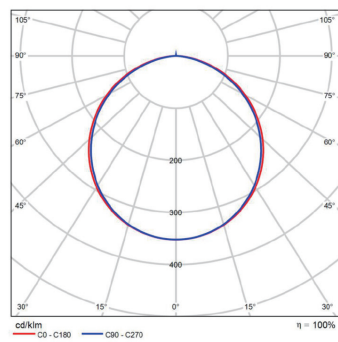


20W-1.2m-60-857

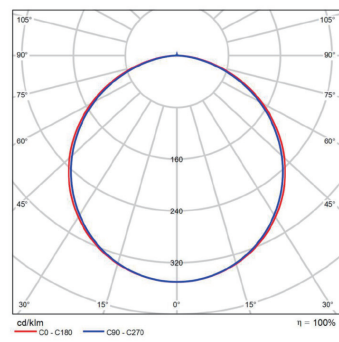


30W-1.2m-80-857

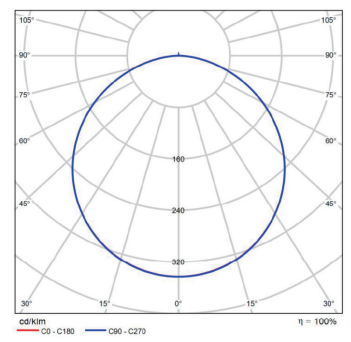


30W-1.2m-100-857

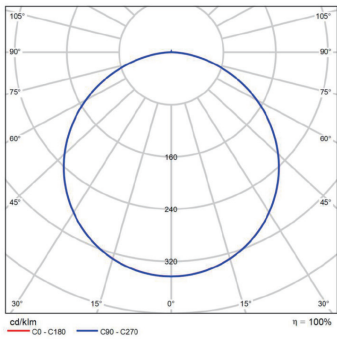


40W-1.2m-120-857

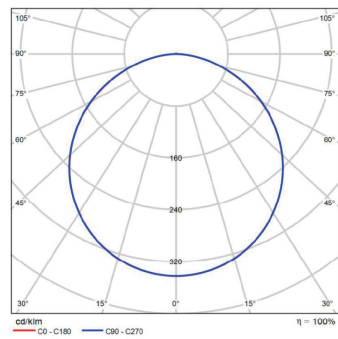


40W-1.2m-150-857

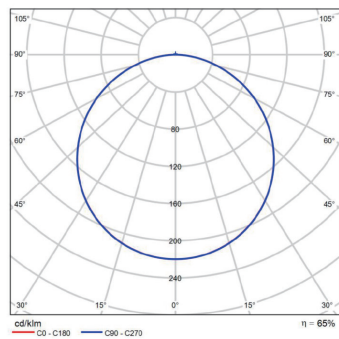


20W-1.2m-40-857-CONN

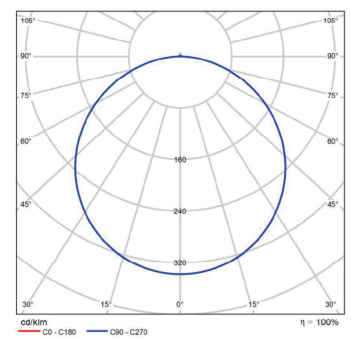


30W-1.2m-60-857-CONN

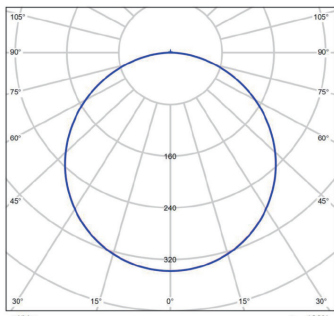


30W-1.2m-80-857-CONN

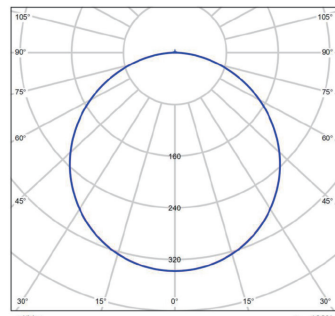


30W-1.2m-100-857-CONN

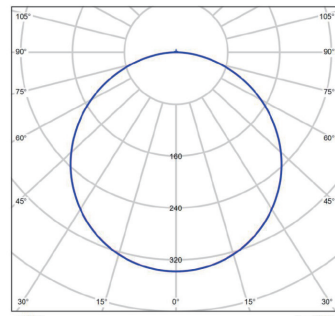


40W-1.2m-120-857-CONN

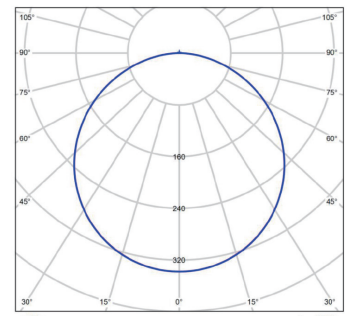


40W-1.2m-150-857-CONN

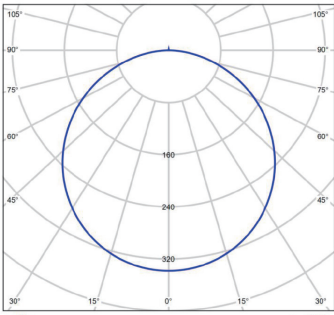


30W-1.2m-60-82757-CONN

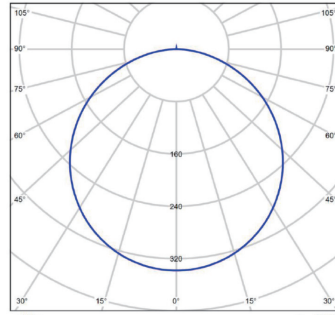


30W-1.2m-80-82757-CONN

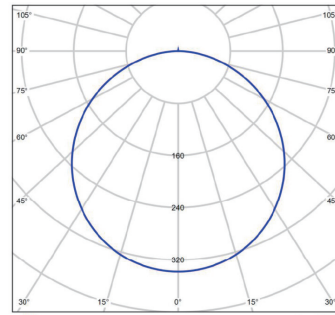

30W-1.2m-100-82757-CONN

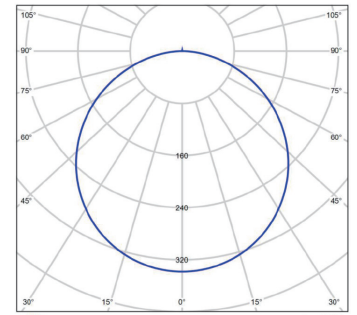

40W-1.2m-120-82757-CONN

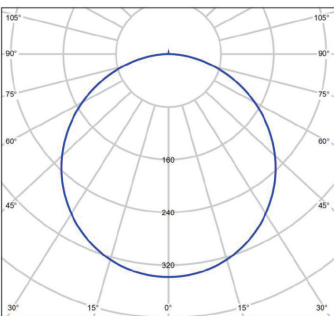

40W-1.2m-150-82757-CONN

OPPLE SHANGHAI OFFICE
 Building V3, The Mixc, 1799 Wuzhong Road,
 Minhang District, Shanghai, China
 ZIP: 201103
T + 86 21 3855 0000
E intersales@opple.com

WWW.OPPLE.COM/EN