LED EcoMax1 Candle

Features

- Light emitted through prism lens
- Gold, silver and white color options
- Energy efficient

Benefits

- Ideal for use in chandeliers, produces beautiful sparkling effect
- Easily match fixture color
- Up to 85% energy savings compared to incandescent candle

Application

Home, Hotel, Retail, Restaurant, Shopping Mall

Specification

Product Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Beam Angle (°)	CRI	CCT (K)	Average Life Time(hrs)	Energy Level	Finishing Colour	Tail Shape
LED E1 C35 E14 3W Golden/Silver	3	0.5	250	83	240	80	2700/6500	20000	A+	Golden/Silver	Bubble
LED E1 C35 E14 5W Golden/Silver	5	0.5	425	85	240	80	2700/6500	20000	A+	Golden/Silver	Bubble
LED E1 F35 E14 3W Golden/Silver	3	0.5	250	83	240	80	2700/6500	20000	A+	Golden/Silver	Flame
LED E1 F35 E14 5W Golden/Silver	5	0.5	425	85	240	80	2700/6500	20000	A+	Golden/Silver	Flame
LED E1 C35 E14 3W White	3	0.5	265	88	240	80	2700/6500	20000	A+	White	Bubble
LED E1 C35 E14 5W White	5	0.5	450	90	240	80	2700/6500	20000	A+	White	Bubble
LED E1 F35 E14 3W White	3	0.5	265	88	240	80	2700/6500	20000	A+	White	Flame
LED E1 F35 E14 5W White	5	0.5	450	90	240	80	2700/6500	20000	A+	White	Flame

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	100-240
AC / DC	AC

Mechanical Properties	
Optical Material	PC
Housing Material	PBT
Finishing Colour	Golden/Silver/White

Application Conditions	
IP	IP20
Operating Temperature	-20~45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Packaging Information

Product Description	Single Box(1pc/box)		Outer box		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	BOX QTY (pcs/unit)
LED E1 C35 E14 3W Golden/Silver	35x35x108	0.049	410x215x137	2.45	50
LED E1 C35 E14 5W Golden/Silver	35x35x110	0.049	410x215x137	2.45	50
LED El F35 E14 3W Golden/Silver	35x35x135	0.052	410x215x155	2.60	50
LED El F35 E14 5W Golden/Silver	35x35x135	0.052	410x215x155	2.60	50
LED El C35 E14 3W White	35x35x108	0.047	410x215x137	2.35	50
LED El C35 E14 5W White	35x35x110	0.047	410x215x137	2.35	50
LED E1 F35 E14 3W White	35x35x135	0.050	410x215x155	2.50	50
LED E1 F35 E14 5W White	35x35x135	0.050	410x215x155	2.50	50

Dimensional Drawing

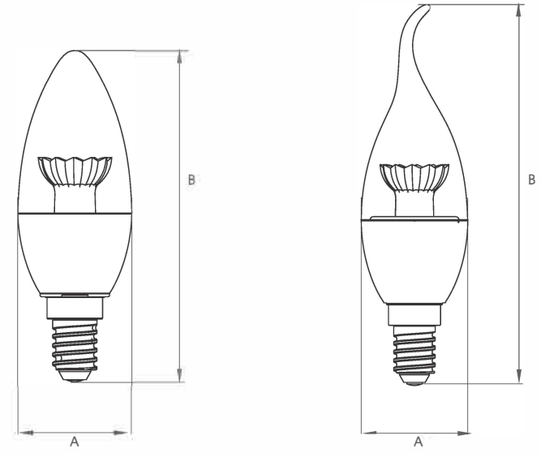

	C35	F35
A (mm)	Φ35	Φ35
B (mm)	105	125